


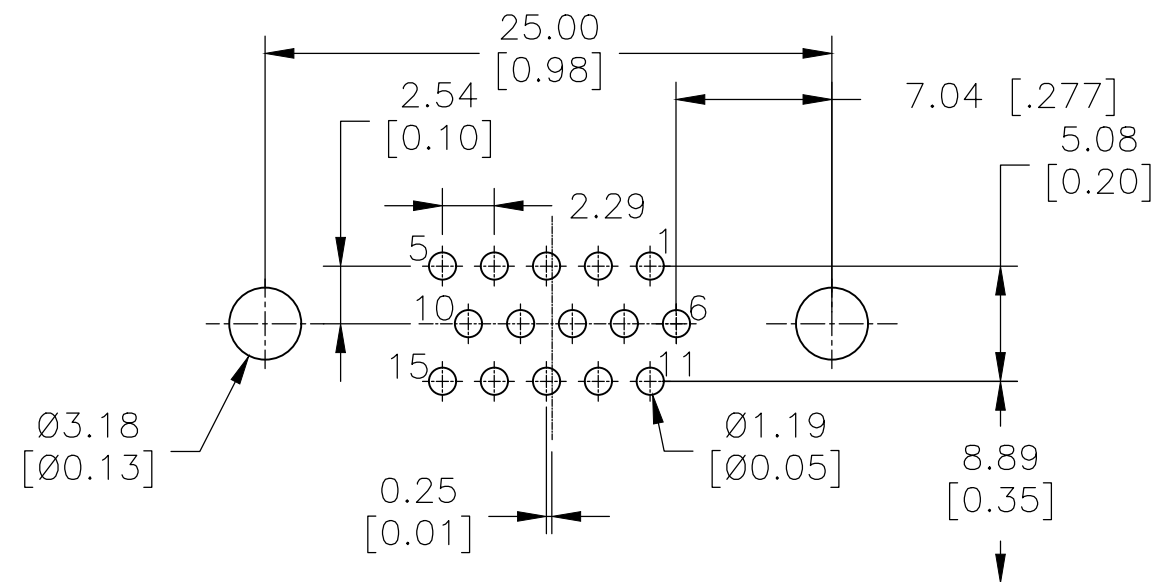



NOTES:

INSULATOR:PA9T+G.F UL94V-O
CONTACT:PHOSPHOR BRONZE
" GOLD PLATING ON CONTACT AREA
100u" MATTE TIN PLATING ON SOLDER TAIL
50u" NICKEL UNDERPLATED OVERALL

HOLDDOWN:BRASS,100u" TIN OVER 50u" NICKEL
SHEEL:SPCC,50u" NICKEL PLATING OVERALL
RIVET:BRASS,NICKEL PLATING OVERALL
SCREWLOCK:BRASS,Ni PLATED

LOT NUMBER "XXXX"

STANDS FOR CALENDAR YEAR
STANDS FOR WEEK NUMBER

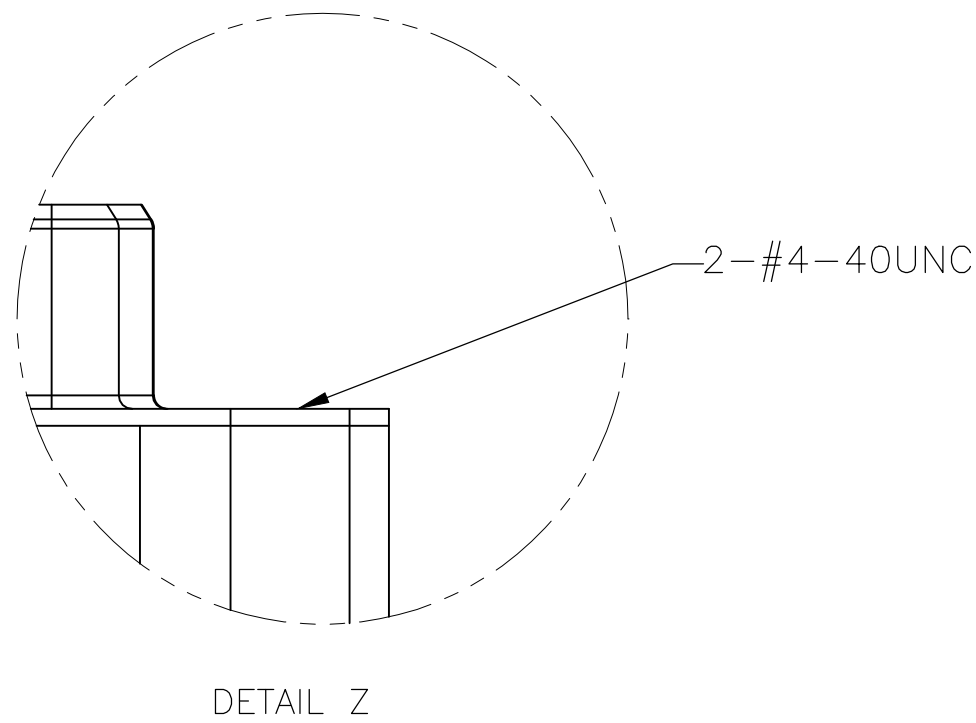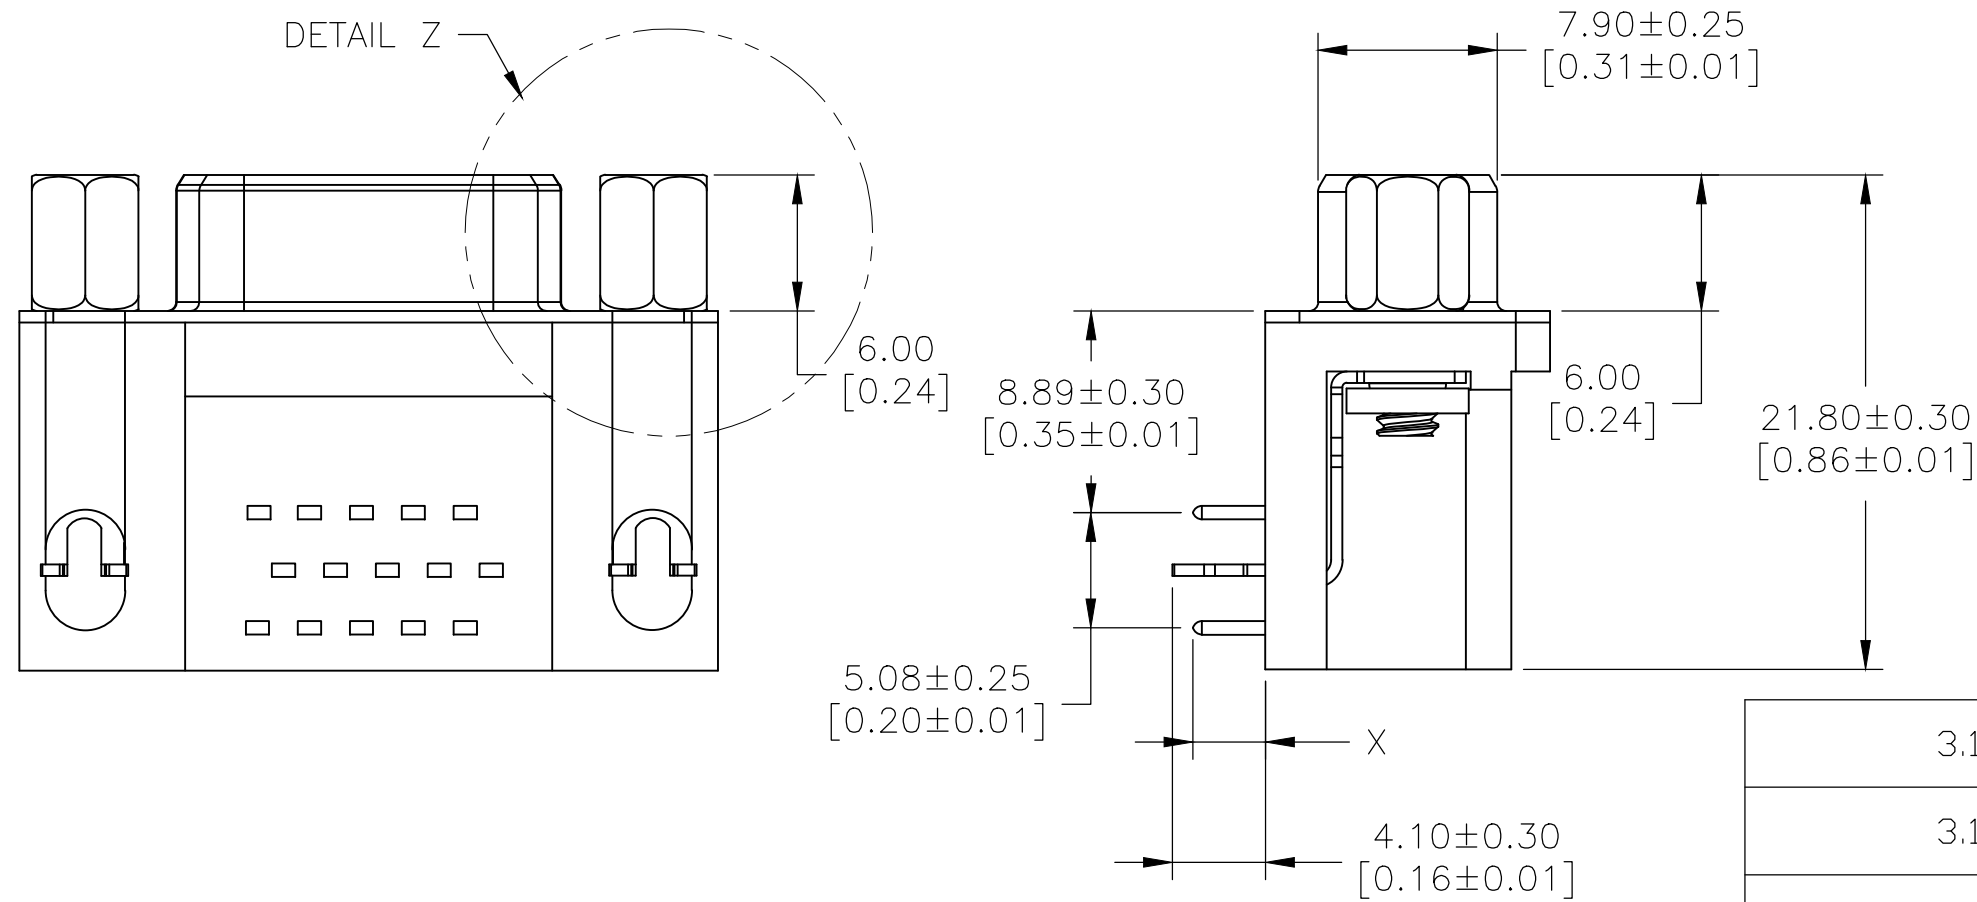

3.18 [0.13]	300U BLUE	NO SEE DETAIL Z	30 μ "Au	2311586-5
3.18 [0.13]	300U BLUE	NO SEE DETAIL Z	Au Flash	2311586-4
2.7 [0.11]	BLACK	YES	15 μ "Au	2311586-3
2.7 [0.11]	661C BLUE	YES	Au Flash	2311586-2
3.18 [0.13]	300U BLUE	YES	Au Flash	2311586-1
X $\pm$ 0.38 [$\pm$ 0.015] POST LENGTH	HOUSING COLOR	SCREWLOCK	Contact Area Plating	P/N

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 20FEB2017 AJITH PAI CHK 20FEB2017 DANIEL GORENC APVD 20FEB2017 DANIEL GORENC		 TE Connectivity			
DIMENSIONS: mm [INCHES]		TOLERANCES, UNLESS OTHERWISE SPECIFIED:		NAME AMPLIMITE RECEPTACLE, HD22, RIGHT ANGLE, 15P — —			
		PRODUCT SPEC 108-130023					
		APPLICATION SPEC —					
MATERIAL —		FINISH —		SIZE A2	CAGE CODE 00779	DRAWING NO G-2311586	RESTRICTED TO —
CUSTOMER DRAWING				SCALE 3:1	SHEET 1 of 1	REV D	