




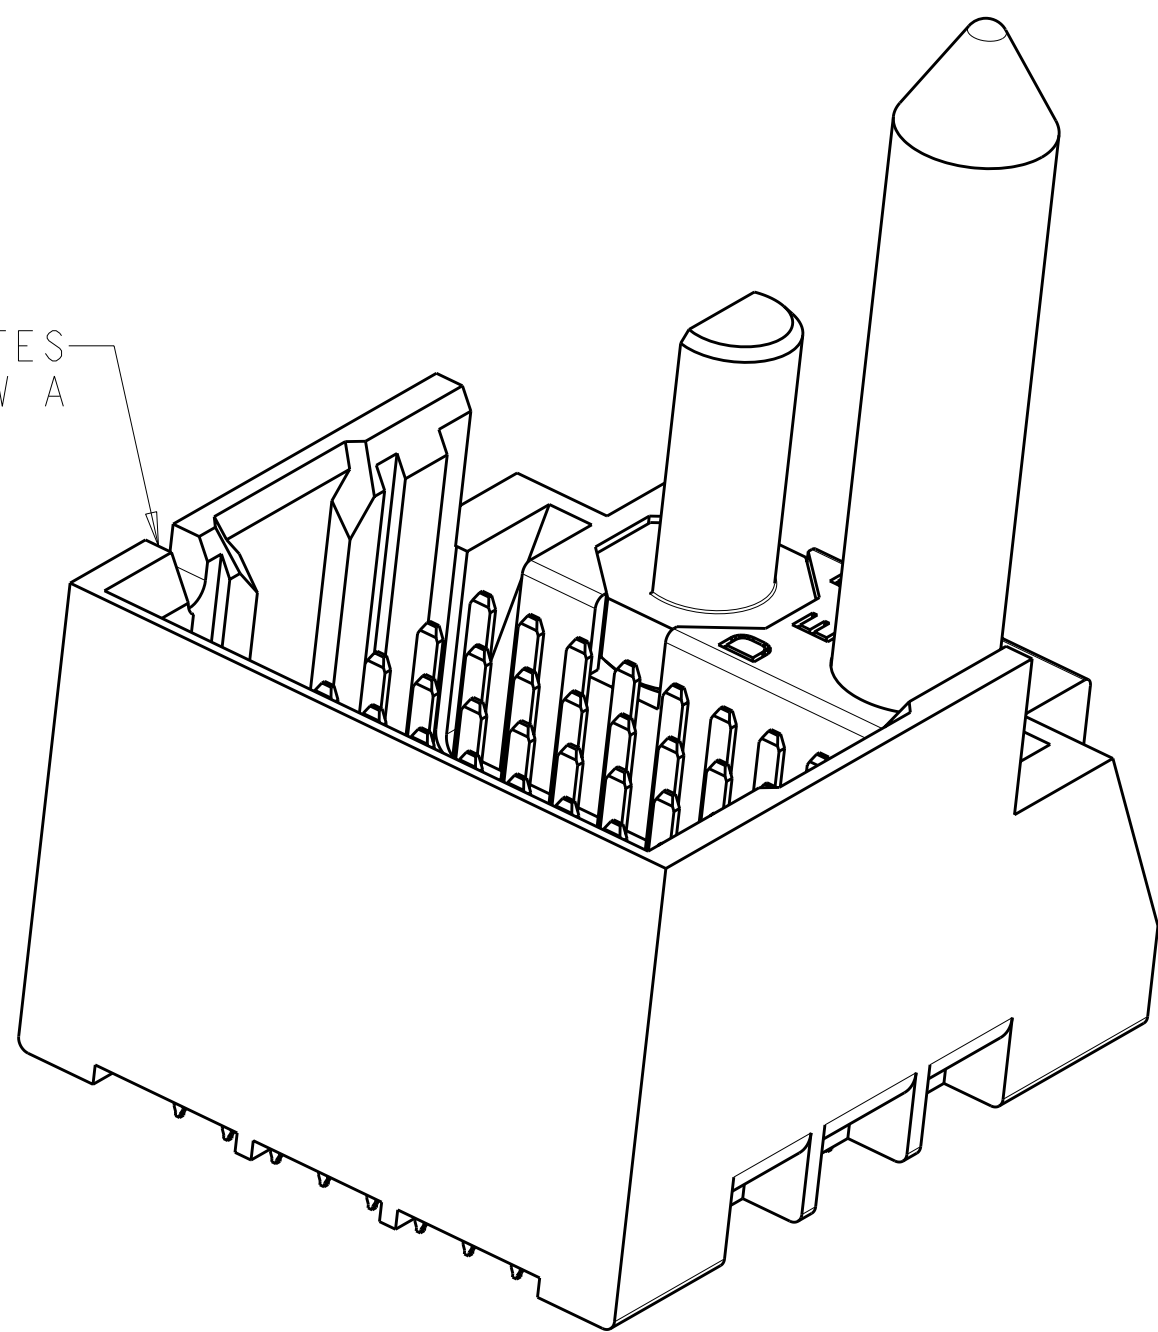


- ① MATERIAL:
HOUSING: LCP, GLASS FILLED, UL94V-0.
TERMINALS: HIGH PERFORMANCE COPPER ALLOY.
- ② FINISH:
30μ" MIN GOLD IN CONTACT AREA. SELECTIVE TIN
ON PCB TAILS, NICKEL OVERALL.
- ③ FINISH:
30μ" MIN GOLD IN CONTACT AREA. SELECTIVE TIN-LEAD
ON PCB TAILS, NICKEL OVERALL.
4. SCREWS PACKAGED IN END OF PACKAGING TUBE.
- ⑤ FOR GROUNDED GUIDE PIN USE Ø3.56±0.08 PTH,
Ø3.66 DRILL, AND Ø6.5 PAD.
6. KEYING PIN SHOWN IN POSITION A, SEE KEYING CHART
ON SHEET 2 FOR OTHER POSITIONS.

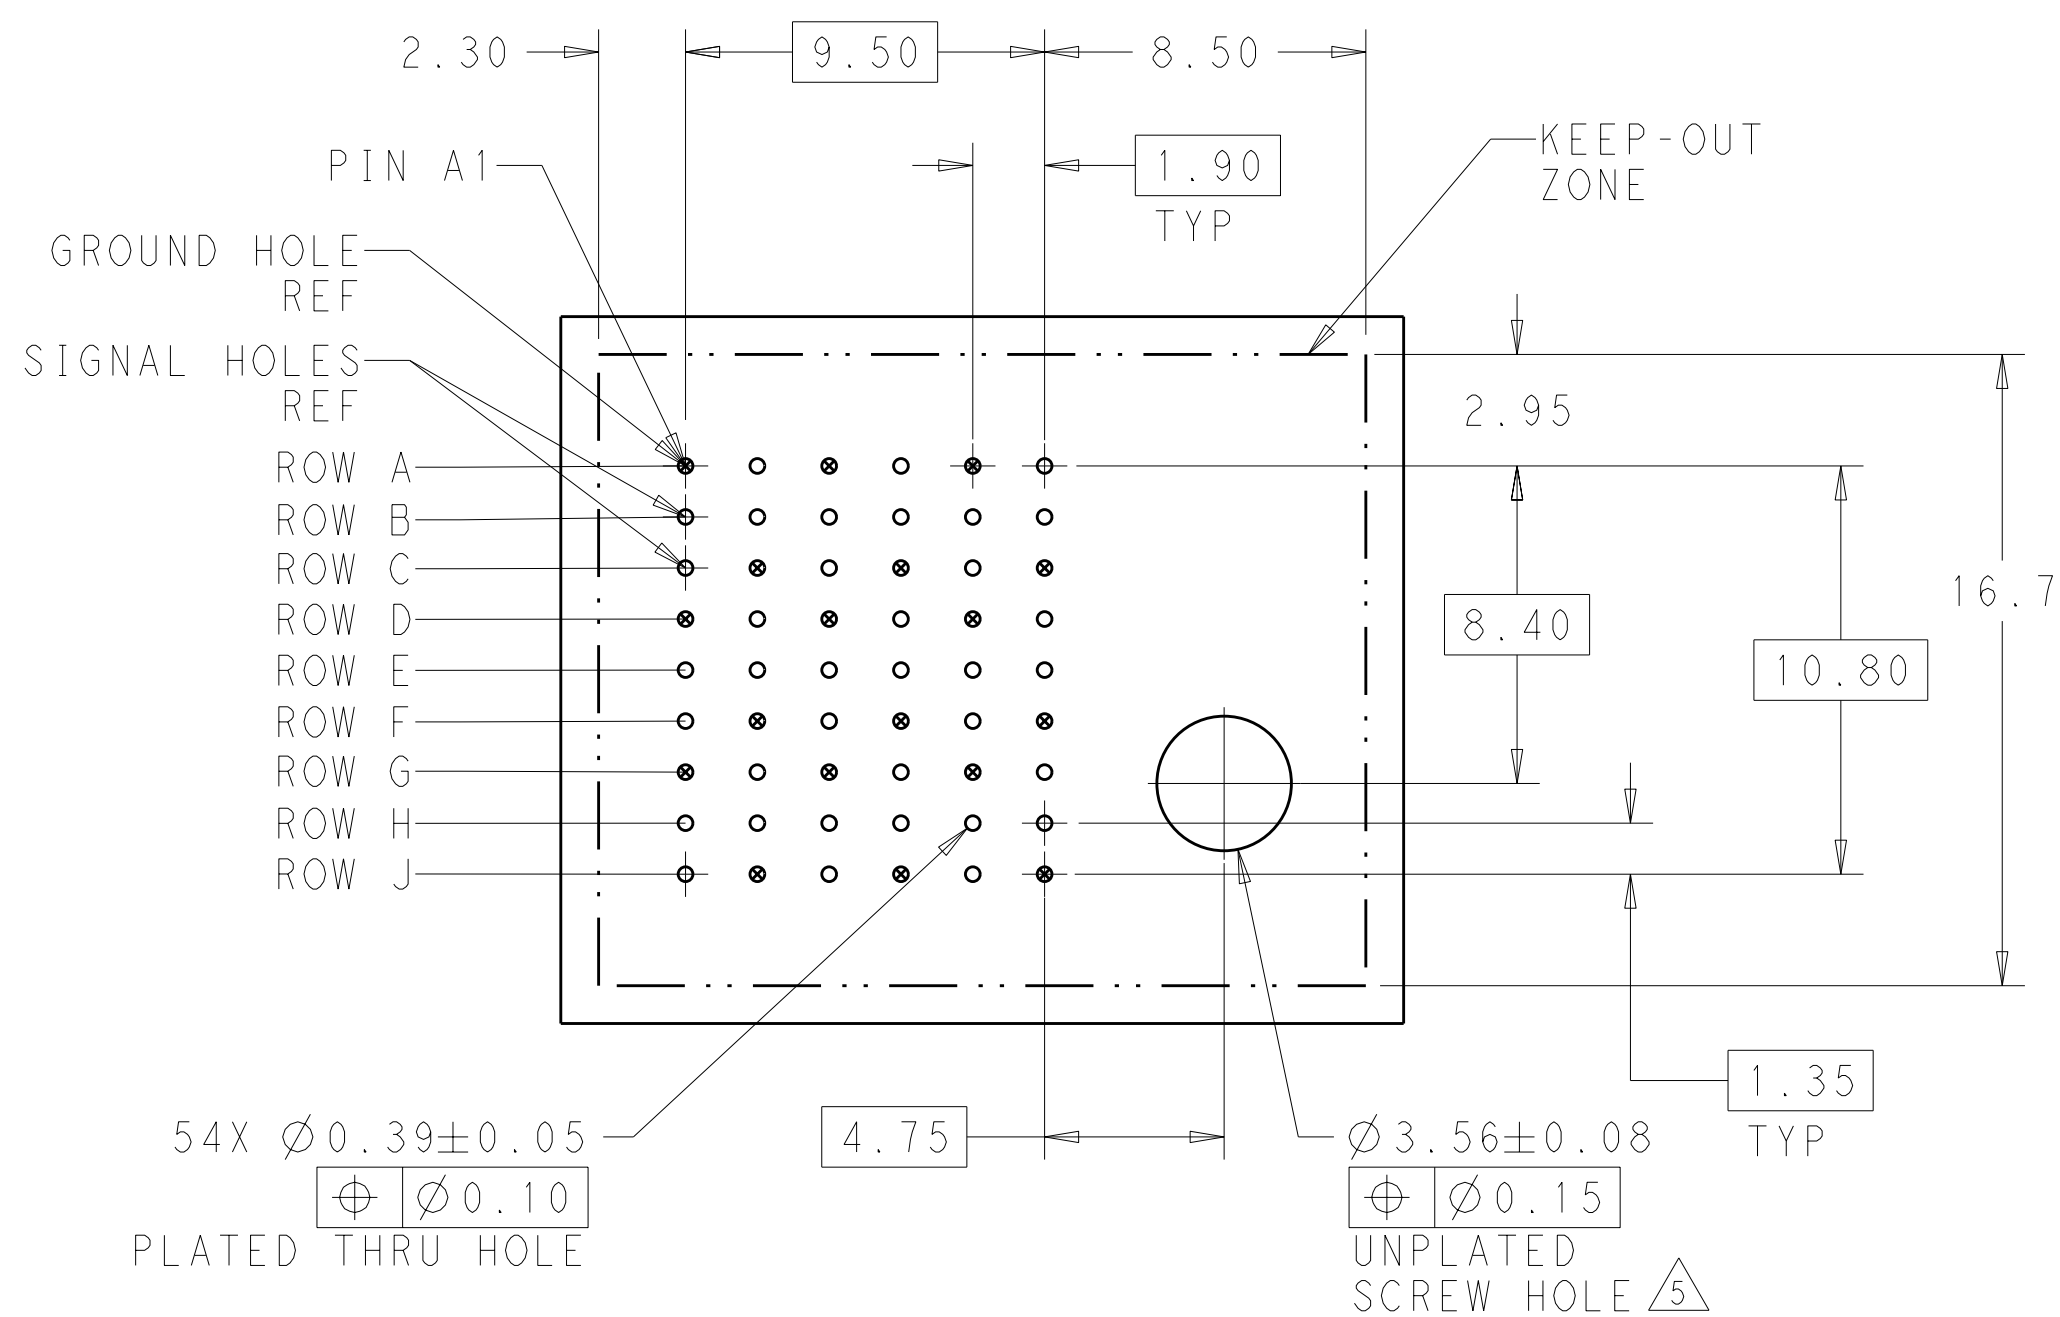

RIGHT GUIDED
BACKPLANE HOLE PATTERN
(CONNECTOR SIDE)

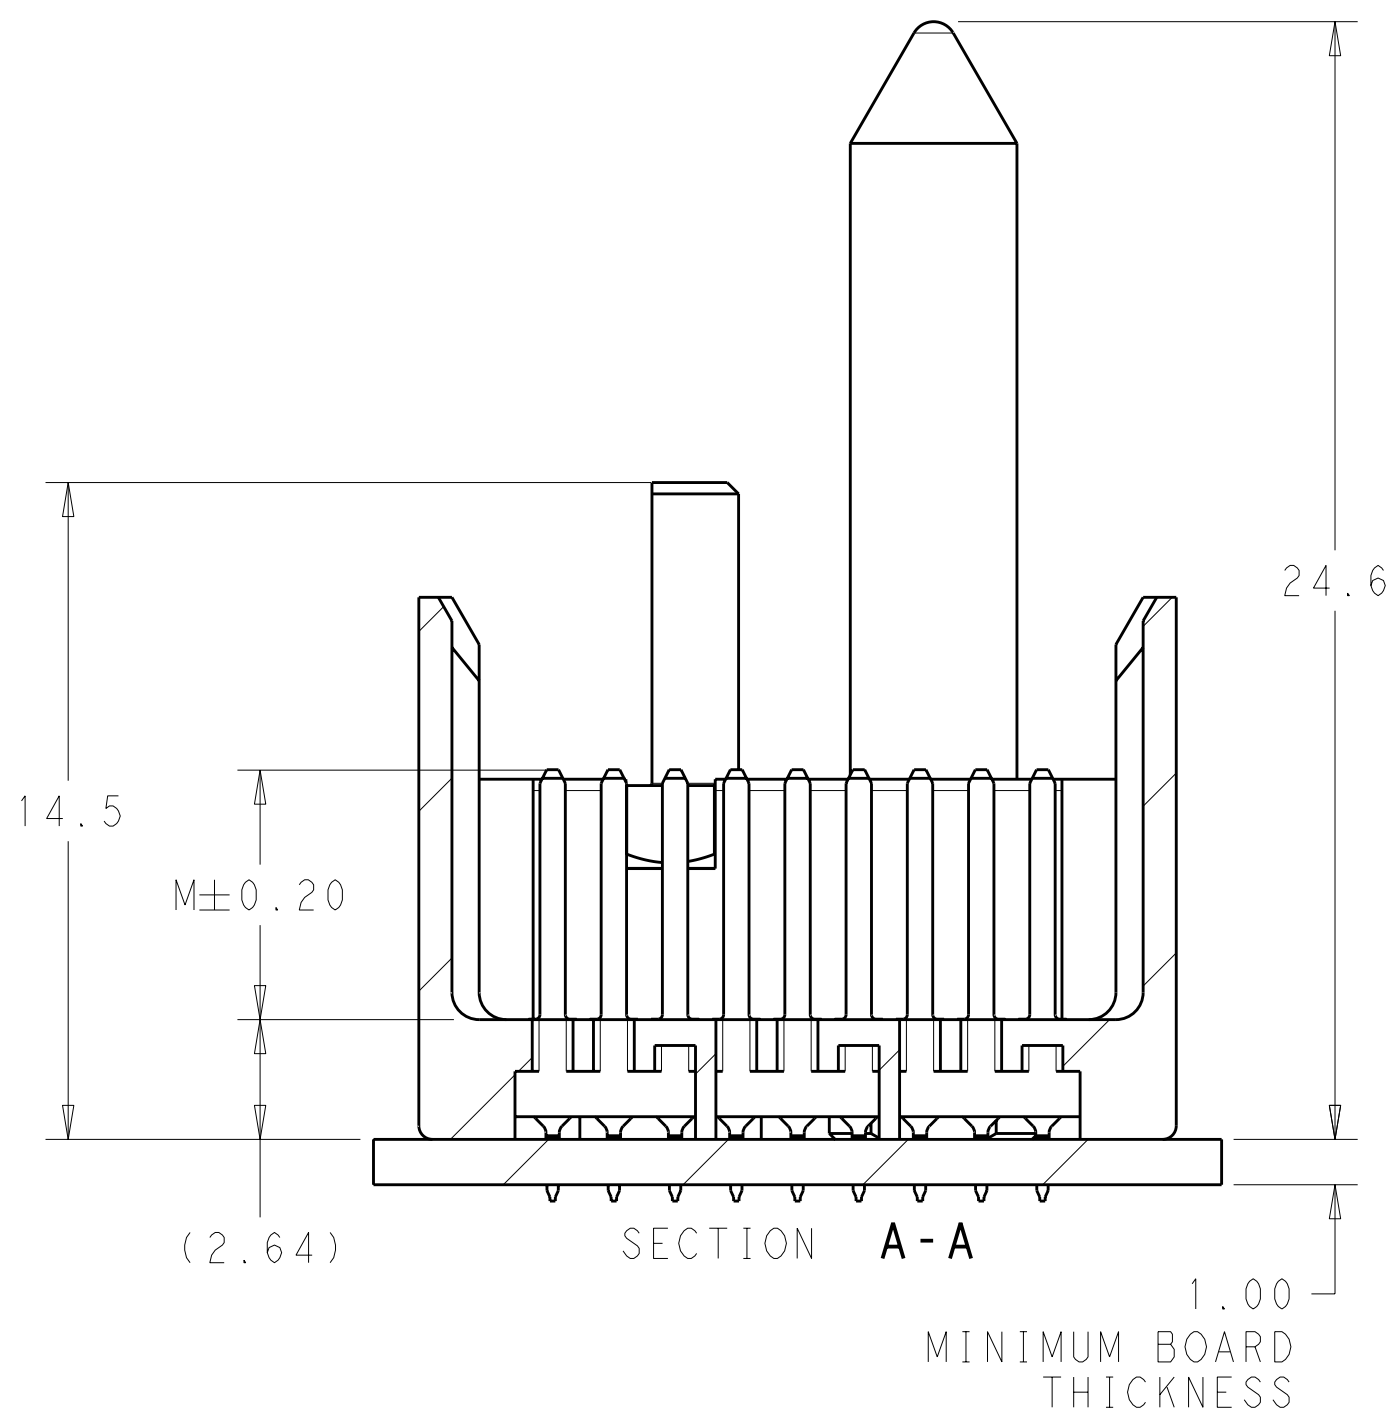

THIS DRAWING IS A CONTROLLED DOCUMENT.				DWN K. SHOBER		05JAN2011				TE Connectivity	
DIMENSIONS: mm				TOLERANCES UNLESS OTHERWISE SPECIFIED:				CHK EABY		05JAN2011	
								APPR EABY		05JAN2011	
				0 PLC ±0.25 2 PLC ±0.13 2 PLC ± 2 PLC ± ANGLES ±°				NAME		IMPACT, 3 PAIR, 6 COLUMN, HEADER RIGHT GUIDED, LEFT END WALL SIGNAL MODULE, 0.39 PTH	
								PRODUCT SPEC			
MATERIAL 				FINISH SEE TABLE				APPLICATION SPEC			
								SIZE		CASE CODE	
				WEIGHT -				A100779		C-2132533	
CUSTOMER DRAWING				SCALE 6:1				SHEET 1 OF 2		REV A	

LOC		DIST		REVISIONS					
AD		00		P	LTR	DESCRIPTION	DATE	OWN	APVD
				-	-	SEE SHEET 1	-	-	-

	H	5.5	8-2132533-6
	H	4.9	8-2132533-5
	H	4.5	8-2132533-4
	H	5.5	8-2132533-3
	H	4.9	8-2132533-2
	H	4.5	8-2132533-1
	G	5.5	7-2132533-6
	G	4.9	7-2132533-5
	G	4.5	7-2132533-4
	G	5.5	7-2132533-3
	G	4.9	7-2132533-2
	G	4.5	7-2132533-1
	F	5.5	6-2132533-6
	F	4.9	6-2132533-5
	F	4.5	6-2132533-4
	F	5.5	6-2132533-3
	F	4.9	6-2132533-2
	F	4.5	6-2132533-1
	E	5.5	5-2132533-6
	E	4.9	5-2132533-5
	E	4.5	5-2132533-4
	E	5.5	5-2132533-3
	E	4.9	5-2132533-2
	E	4.5	5-2132533-1
	D	5.5	4-2132533-6
	D	4.9	4-2132533-5
	D	4.5	4-2132533-4
	D	5.5	4-2132533-3
	D	4.9	4-2132533-2
	D	4.5	4-2132533-1
	C	5.5	3-2132533-6
	C	4.9	3-2132533-5
	C	4.5	3-2132533-4
	C	5.5	3-2132533-3
	C	4.9	3-2132533-2
	C	4.5	3-2132533-1
	B	5.5	2-2132533-6
	B	4.9	2-2132533-5
	B	4.5	2-2132533-4
	B	5.5	2-2132533-3
	B	4.9	2-2132533-2
	B	4.5	2-2132533-1
	A	5.5	1-2132533-6
	A	4.9	1-2132533-5
	A	4.5	1-2132533-4
	A	5.5	1-2132533-3
	A	4.9	1-2132533-2
	A	4.5	1-2132533-1
	-	5.5	2132533-6
	-	4.9	2132533-5
	-	4.5	2132533-4
	-	5.5	2132533-3
	-	4.9	2132533-2
	-	4.5	2132533-1
FINISH	KEY POSITION	DIM M	PART NUMBER

REFER TO WWW.TE.COM
FOR PRODUCT AVAILABILITY

KEY POSITION
CHART

NONE

A

E

B

F

C

G

D

H

THIS DRAWING IS A CONTROLLED DOCUMENT			DWN	J. K. SHOBER	05JAN2011	 TE Connectivity		
			CHK	J. EABY	05JAN2011			
DIMENSIONS:			TOLERANCES UNLESS OTHERWISE SPECIFIED:			NAME		
mm						IMPACT, 3 PAIR, 6 COLUMN, HEADER RIGHT GUIDED, LEFT END WALL SIGNAL MODULE, 0.39 PTH		
			0 PLC ±0.25 1 PLC ±0.13 2 PLC ±0.13 3 PLC ± 4 PLC ± ANGLES ±			SIZE CAGE CODE DRAWING NO		
MATERIAL			FINISH SEE TABLE			A100779C=2132533		
						RESTRICTED TO		