


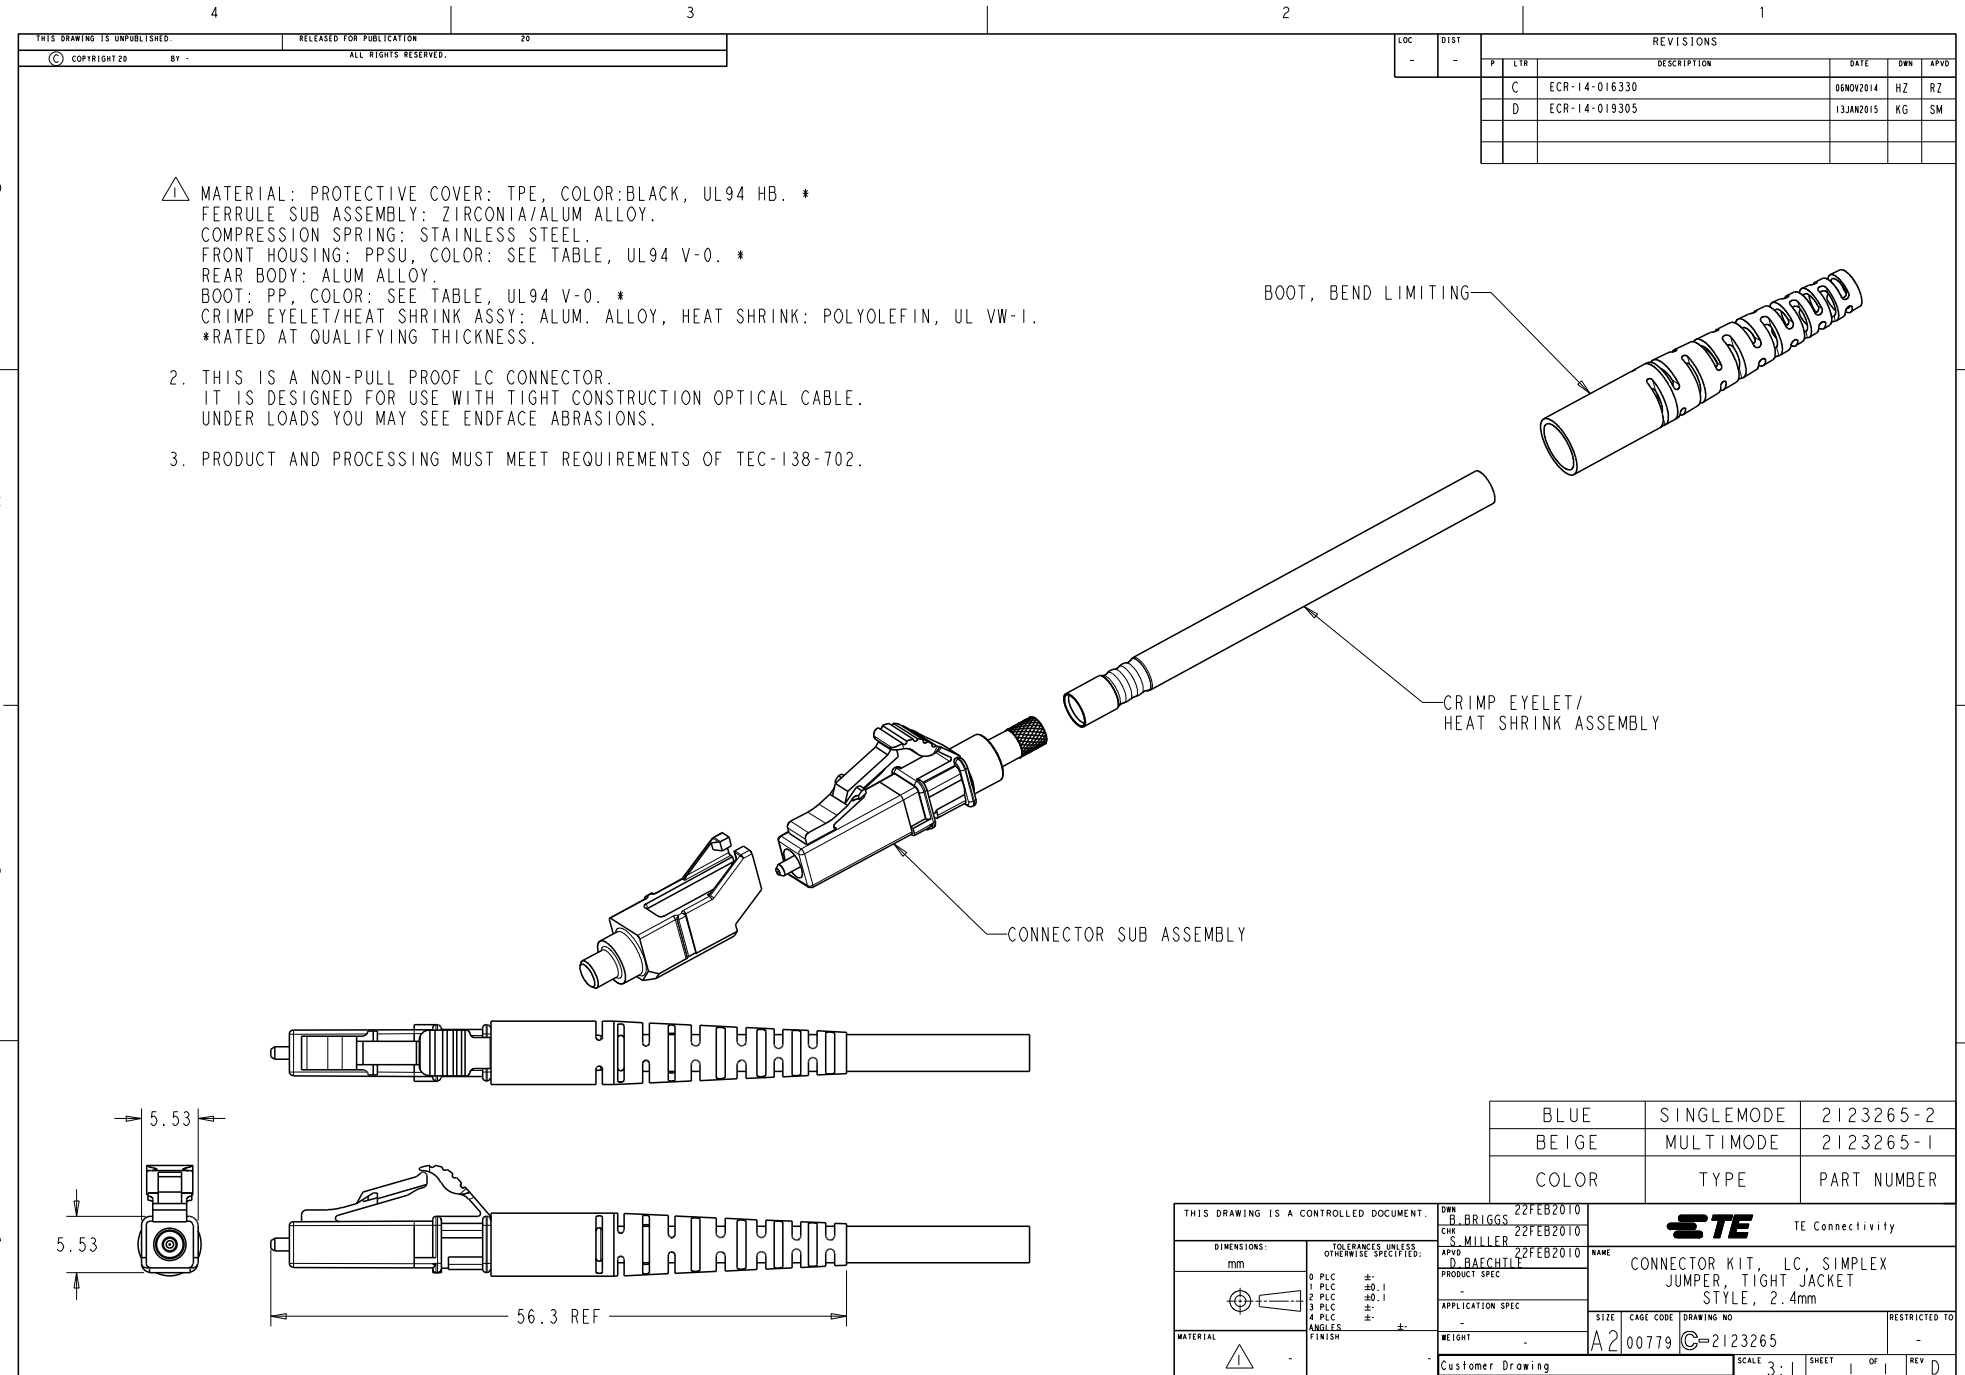

⚠ MATERIAL: PROTECTIVE COVER: TPE, COLOR:BLACK, UL94 HB. \*  
FERRULE SUB ASSEMBLY: ZIRCONIA/ALUM ALLOY.  
COMPRESSION SPRING: STAINLESS STEEL.  
FRONT HOUSING: PPSU, COLOR: SEE TABLE, UL94 V-0. \*  
REAR BODY: ALUM ALLOY.  
BOOT: PP, COLOR: SEE TABLE, UL94 V-0. \*  
CRIMP EYELET/HEAT SHRINK ASSY: ALUM. ALLOY, HEAT SHRINK: POLYOLEFIN, UL VW-1.  
\*RATED AT QUALIFYING THICKNESS.

- 2. THIS IS A NON-PULL PROOF LC CONNECTOR.  
IT IS DESIGNED FOR USE WITH TIGHT CONSTRUCTION OPTICAL CABLE.  
UNDER LOADS YOU MAY SEE ENDFACE ABRASIONS.
- 3. PRODUCT AND PROCESSING MUST MEET REQUIREMENTS OF TEC-138-702.

| LOC | DIST | REVISIONS |     |               |           |     |      |
|-----|------|-----------|-----|---------------|-----------|-----|------|
|     |      | P         | LTR | DESCRIPTION   | DATE      | OWN | APVD |
|     |      | C         |     | ECR-14-016330 | 06NOV2014 | HZ  | RZ   |
|     |      | D         |     | ECR-14-019305 | 13JAN2015 | KG  | SM   |
|     |      |           |     |               |           |     |      |
|     |      |           |     |               |           |     |      |

|       |            |             |
|-------|------------|-------------|
| BLUE  | SINGLEMODE | 2123265-2   |
| BEIGE | MULTIMODE  | 2123265-1   |
| COLOR | TYPE       | PART NUMBER |

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:  
mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:

|       |      |
|-------|------|
| 0 PLC | ±    |
| 1 PLC | ±0.1 |
| 2 PLC | ±0.1 |
| 3 PLC | ±    |
| 4 PLC | ±    |

ANGLES

FINISH

MATERIAL

OWN  
B. BRIGGS  
CHK  
S. MILLER  
APVD  
D. BAECHTLE

22FEB2010  
22FEB2010  
22FEB2010

PRODUCT SPEC  
APPLICATION SPEC  
WEIGHT  
Customer Drawing

NAME  
CONNECTOR KIT, LC, SIMPLEX  
JUMPER, TIGHT JACKET  
STYLE, 2.4mm

SIZE  
A2

CAGE CODE  
00779

DRAWING NO  
C=2123265

RESTRICTED TO

TE Connectivity

SCALE 3:1

SHEET 1 OF 1

REV D