

4

3

2

1

used for:

D-SUB HD

POS.	A -0.76	B -0.25	C	Part NO.
15	31.19	16.46	25.00 $^{+0.12}_{-0.13}$	164A17459X
26	39.52	24.79	33.30 $^{+0.15}_{-0.1}$	164A17469X
62	69.70	54.96	63.50 ± 0.13	164A17489X

F

F

E

E

D

D

C




C

B

B

A

A

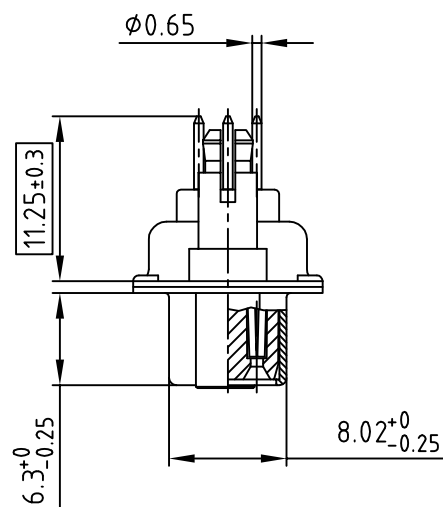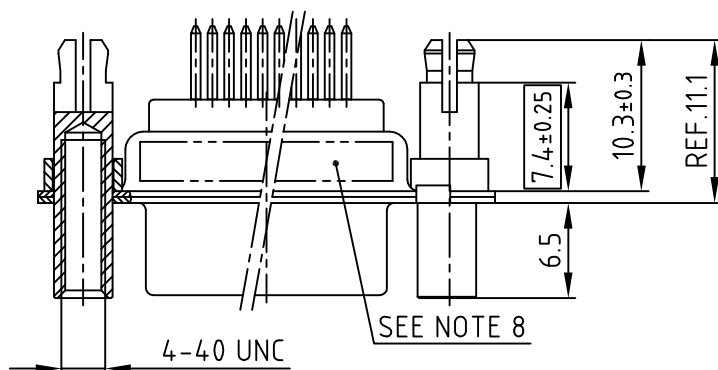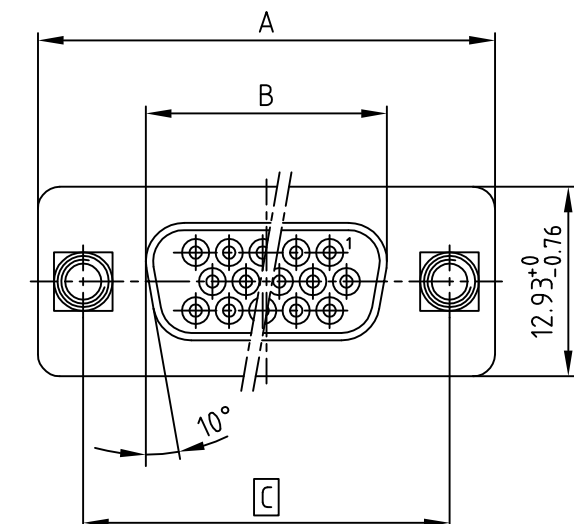



NOTES:

- METALSHELLS: STEEL; min. 320µ" TIN
- INSULATORS: PBT GF UL 94 V-0, BLACK
- CONTACTS: COPPER ALLOY
PLATING: min. 8µ" HARD GOLD OVER min. 50µ" NICKEL
- THREADED LOCK: COPPER ALLOY; min. 200µ" TIN over 80µ" NICKEL
PCB-HOLE: $\phi 3.1 \pm 0.1$; PCB THICKNESS 1.6mm
- COLLAR: COPPER ALLOY; min. 200µ" TIN over 80µ" NICKEL
- P.C.B. HOLE DRILLINGS SEE SHEET 2
- MAXIMUM TORQUE VALUE FOR THREAD: 6" LBS
- CONNECTOR IS PART MARKED: PART-NO. CONEC ABC
- = CRITICAL DIMENSION

APPROVAL * FREIGABE * DEBLOCAGE * AUTOR/ZACION * APPROVAL	
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL * FREIGABE * DEBLOCAGE * AUTOR/ZACION * APPROVAL	

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH
DO NOT ALTER CAD DRAWING BY HAND

				tolerance			
				2002	date	name	
				drawn	06.09,	Parei	
				appd.	06.09.	Mickenbecker	
				norm	DIN 41652		
				d-old			
							
rev.	description	date	name				



scale: 2:1
material: SEE NOTES

title:
D-SUB HD FEMALE
15-62pos. SOLDER PIN STRAIGHT
with threaded lock and spacer clip

dwg no: AutoCAD 2000
16K2A437A
DIN-A
4
sh:1/2


part no: SEE TABLE

4


3

2


1

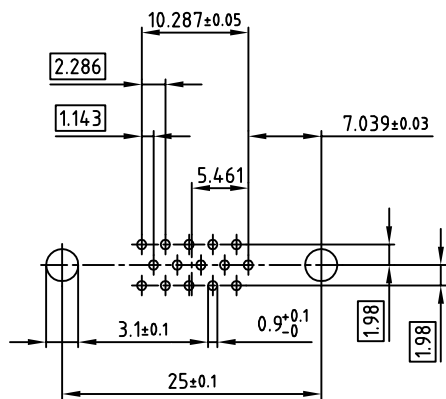

15pos.

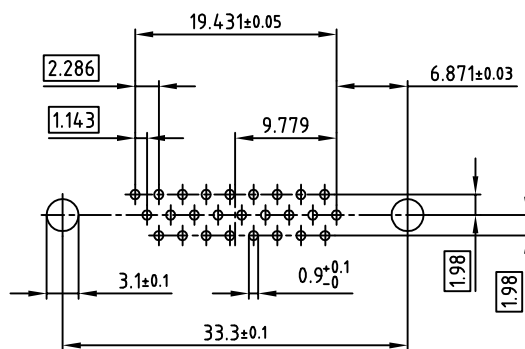

26pos.

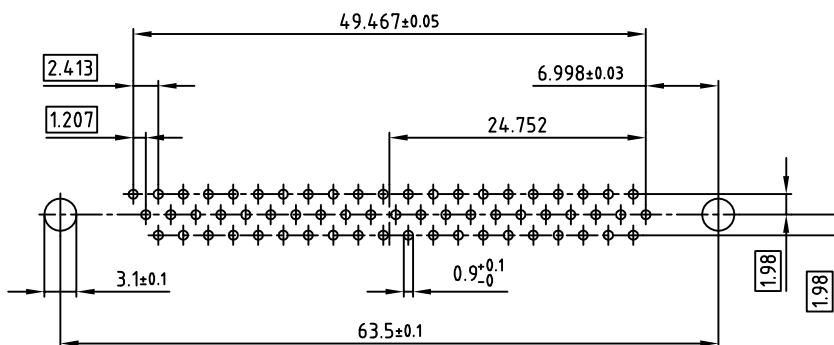

62pos.

used for: D-SUB HD

APPROVAL * FREIGABE * DEBLOCAGE * AUTOR/ZACON * APPROVAL	
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL * FREIGABE * DEBLOCAGE * AUTOR/ZACON * APPROVAL	

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH DO NOT ALTER CAD DRAWING BY HAND

tolerance				scale:	
				2:1	
				material:	
				SEE SHEET 1	
				title:	
				P.C.B. HOLE DRILLINGS	
				D-SUB HD FEMALE 15-62pos. SOLDER PIN	
				with threaded lock and spacer clip	
				dwg no:	
				AutoCAD 2000	
				16K2A437A	
				part no:	
				SEE SHEET 1	

CONEC

DIN-A 3 sh:2/2