
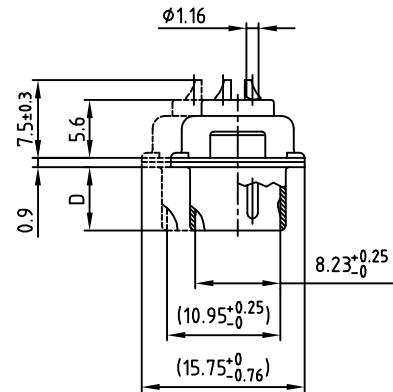
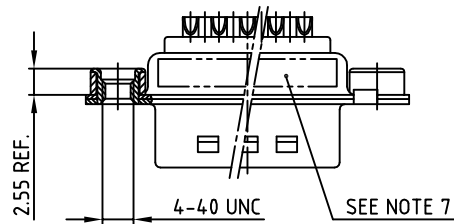


used for: D-SUB

No. of pos.	A -0.76	B +0.25	C	D -0.3	Part No.
9	31.19	16.79	25.00 $\begin{smallmatrix} +0.12 \\ -0.13 \end{smallmatrix}$	6.12	163A11269X
15	39.52	25.12	33.30 $\begin{smallmatrix} +0.15 \\ -0.1 \end{smallmatrix}$	6.12	163A11279X
25	53.42	38.84	47.04 ± 0.13	5.99	163A11289X
37	69.70	55.30	63.50 ± 0.13	5.99	163A11299X
50	67.31	52.68	61.10 $\begin{smallmatrix} +0.14 \\ -0.11 \end{smallmatrix}$	5.99	163A11309X

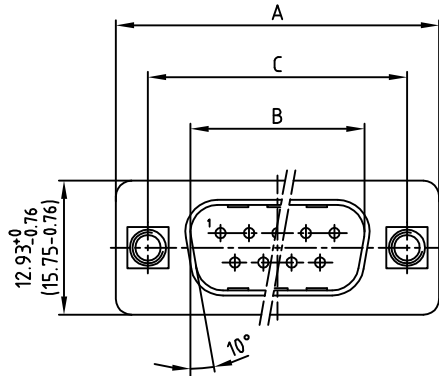

Dimensions in (---) = 50 pos.

NOTES:

- METALSHELLS: STEEL; min. 320µin TIN
- INSULATORS: PBT GF UL 94 V-0, BLACK
- CONTACTS: COPPER ALLOY
PLATING: GOLD FLASH over NICKEL
SOLDER CUP ACCEPTS CABLE AWG 20
- THREADED INSERT: COPPER ALLOY; min. 200µin TIN over 80µin NICKEL
- COLLAR: COPPER ALLOY; min. 200µin TIN over 80µin NICKEL
- MAXIMUM TORQUE VALUE FOR THREAD: 6in LBS
- CONNECTOR IS PART MARKED: **PART-NO. CONEC ABC**

Directive 2002/95/EC RoHS compliant

APPROVAL * FREIGABE * DEBLOCAGE * AUTORIZACION * APPROVAL
CUSTOMER APPROVAL DATE:
NAME: TITLE:
COMPANY NAME:
APPROVAL * FREIGABE * DEBLOCAGE * AUTORIZACION * APPROVAL

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH
DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name
a	Origin		

tolerance		
2006	date	name
drawn	06.02.	Lehmenkühler
appd.	06.02.	Mickenbecker
norm	DIN 41652	
d-old		



scale:	2:1
material:	SEE NOTES
title:	D-SUB MALE 9-50pos. SOLDER CUP with threaded insert
dwg no:	AutoCAD 2004
part no:	SEE TABLE

DIN-A
3
sh: 1/1