





REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	3	REVISED AS PER ECR-24-217957	19AUG2024	GH	AFK

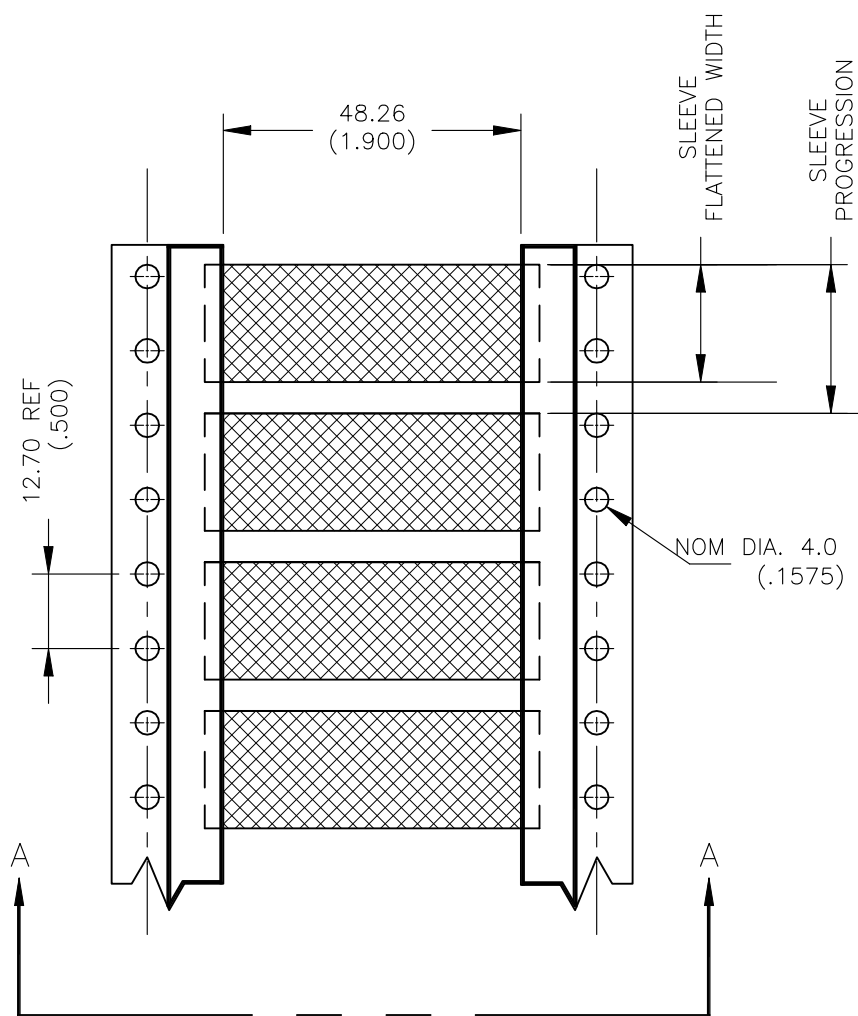

SIDE SCORE




S1




S2


NOTE:
1. SIDE SCORE ALSO AVAILABLE WITH S1 & S2

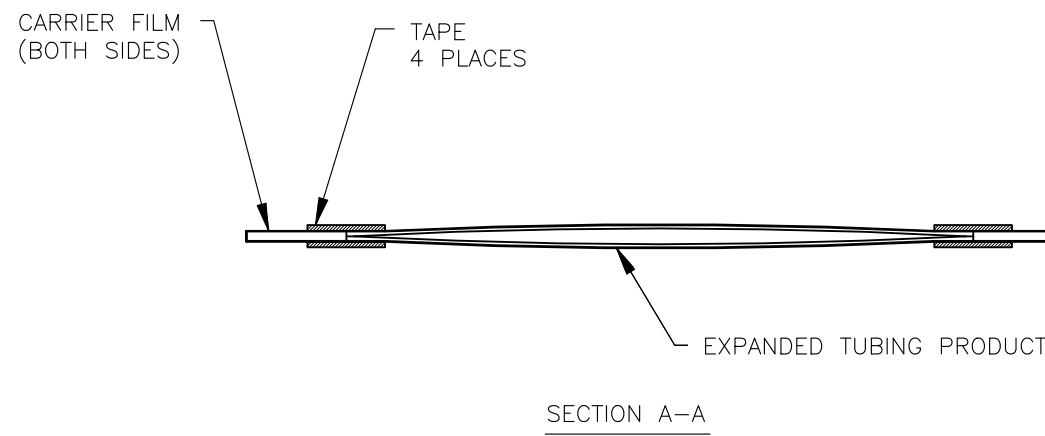

Product Size	2.4	3.2	4.8	6.4	9.5	12.7	19.0	25.4	38.1
Minimum Sleeve Flattened Width	4.90 (.194)	6.50 (.256)	8.9 (.350)	11.0 (.433)	15.7 (.618)	20.7 (.815)	30.7 (1.209)	41.1 (1.618)	61.0 (2.402)
Nominal Sleeve Progression	12.70 (.500)	12.70 (.500)	12.70 (.500)	16.94 (.667)	25.40 (1.000)	29.64 (1.167)	42.34 (1.667)	50.80 (2.00)	72.0 (2.835)
"D" Minimum Supplied I.D.	2.40 (.094)	3.20 (.125)	4.80 (.189)	6.35 (.250)	9.50 (.375)	12.70 (.500)	19.05 (.750)	25.40 (1.00)	38.10 (1.50)
"d" Maximum Recovered I.D.	1.19 (.047)	1.60 (.063)	2.40 (.094)	3.20 (.126)	4.8 (.189)	6.40 (.250)	9.50 (.375)	12.7 (.500)	19.1 (.750)
"W" Recovered wall ±0.08 (.003)	0.50±0.11 (.020±.004)	0.50±0.11 (.020±.004)	0.51±0.11 (.020±.004)	0.65±0.15 (.026±.006)	0.65±0.15 (.026±.006)	0.65±0.15 (.026±.006)	0.75±0.15 (.030±.006)	0.90±0.15 (.035±.006)	1.00±0.20 (.039±.008)

DIMENSIONS IN MM (INCHES)

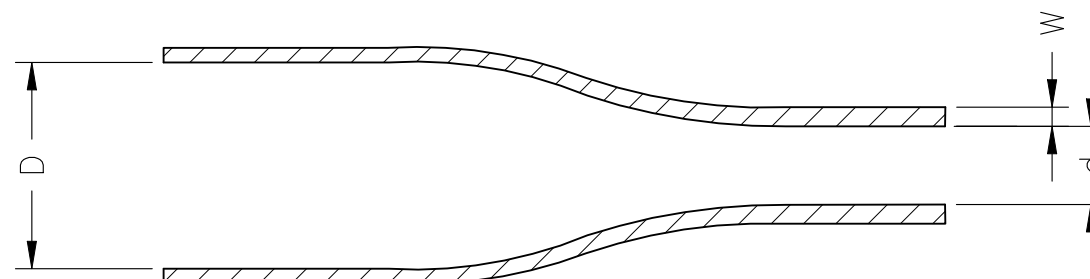

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN AFK	21FEB2020		 TE Connectivity		
		CHK —	—				
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD LS	30MAR2020		NAME ZHD—SCE		
	0 PLC ± —	PRODUCT SPEC		—			
	1 PLC ± —	RW—2536					
	2 PLC ± —	APPLICATION SPEC					
	3 PLC ± —	—		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
	4 PLC ± —			A30198G			©—MCD160011
MATERIAL CROSSLINKED POLYOLEFIN	FINISH —	WEIGHT VARIOUS					—
CUSTOMER DRAWING					SCALE —	SHEET 1 OF 1	REV 3