
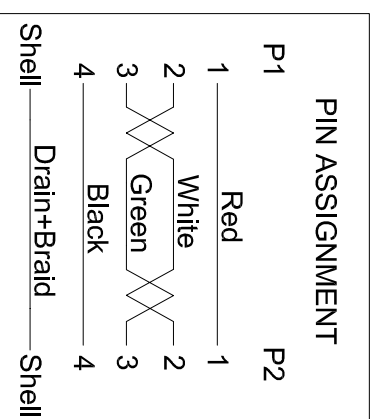
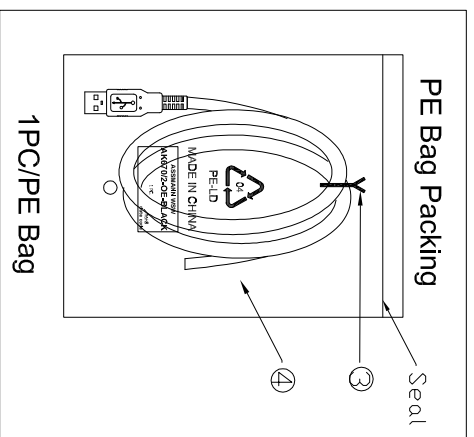


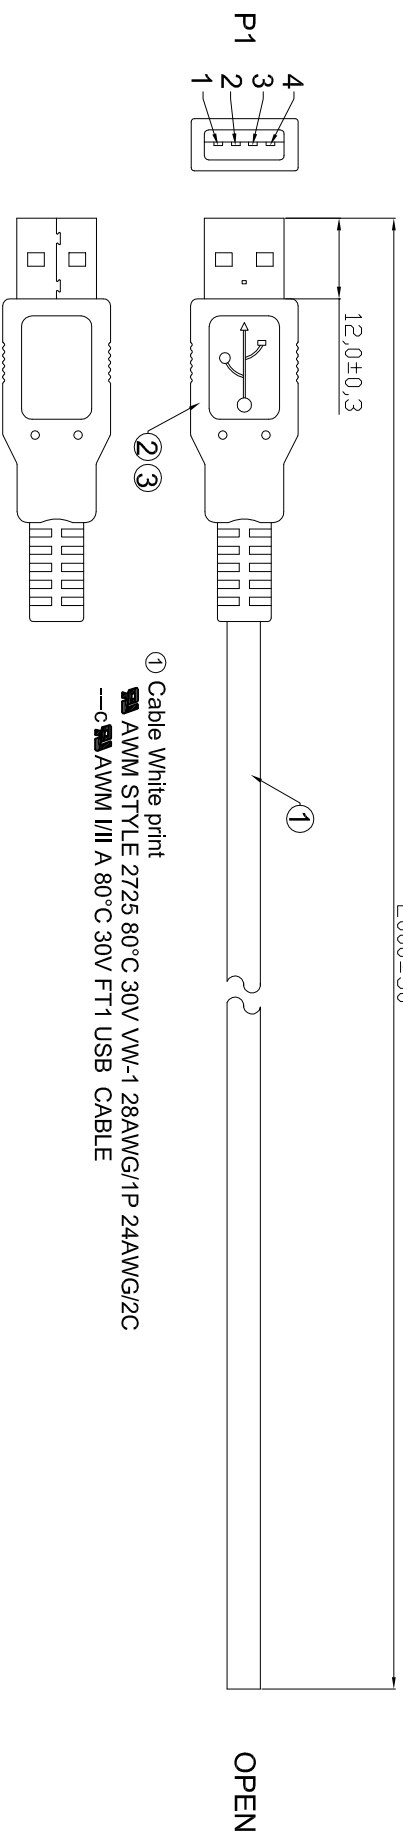

1. 100% short, open, miss wire test
2. Conduct resistance: 2 Ohm max.
3. Insulator resistance: 5MΩ min.
4. Dielectric test: DC 300V

⑤	PE Bag	1	Clear Print black "MADE IN CHINA"+ "1PC"
④	TIE	1	Black
③	Out Jacket	NA	Black PVC-45P
②	CONN	1	USB A Male Shell:Nickel Pin:G/F Insulator color:White
①	Cable	1	USB2.0 UL2725 28#/1P+24#/2C+AEB OD:4.7mm Black
NO.	NAME.	Q'TY	SPECIFICATION

RoHS compliant

Scale	Free						Customer-No.	G
	TOLERANCE							
DIM	TOL	①	Update the drawing	09.05.2016	Amy	Drawing-No.		
		②	Drawn	10.12.2015	Joanna	ASS 7474 CA		
Angle	TOL	Id.	Modification	Date	Name			H
						Replace	Sheet	