

19

RELEASED FOR PUBLICATION


ALL RIGHTS RESERVED.

THIS DRAWING IS UNPUBLISHED.

COPYRIGHT 2011

LOC	DIST	REVISED							
		P	LTR	DESCRIPTION			DATE	DWN	APVD
J	-		BI	REVISED PER ECO-11-005140			02APR2011	RK	HMR

- 1: 本図
- 1: AS SHOWN

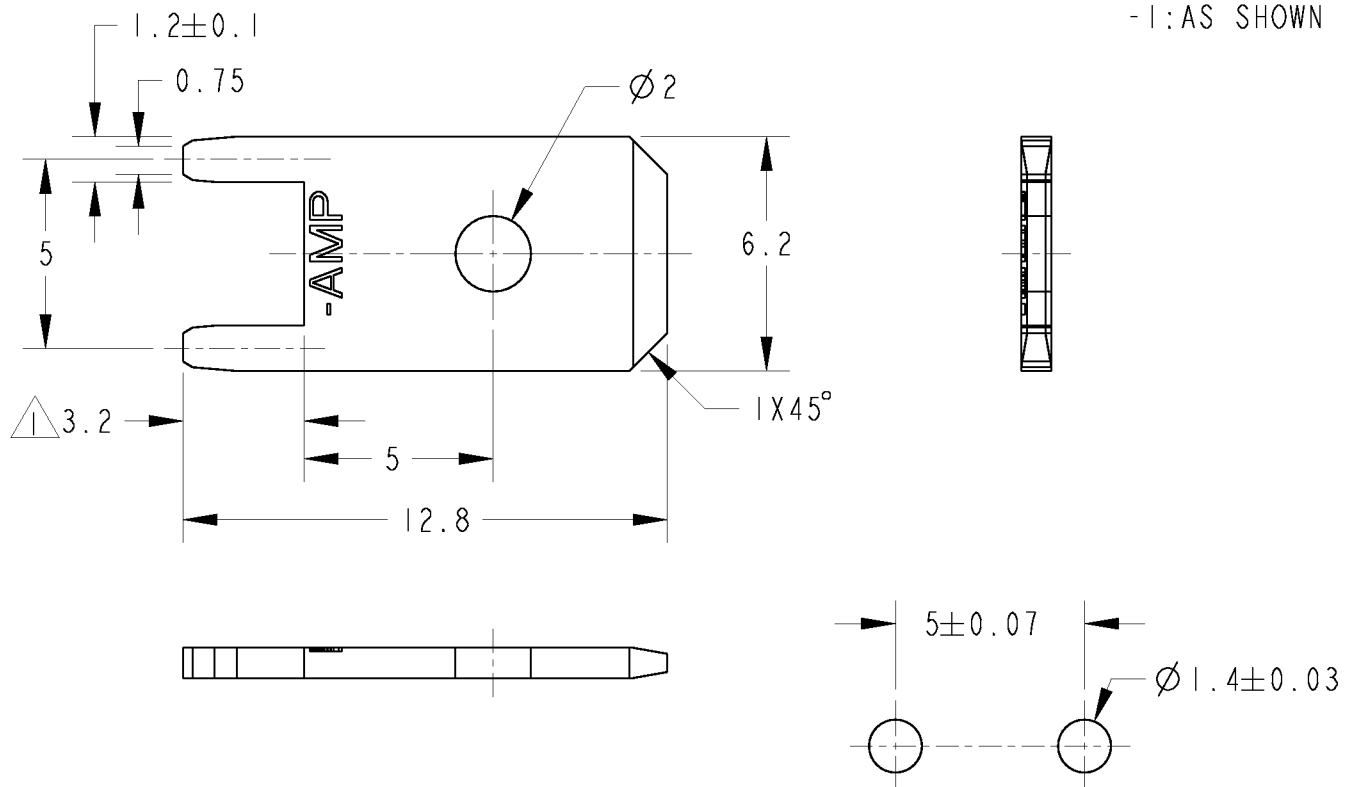

- △ 半田付性
下記条件で半田が浸漬面積の75%以上付着のこと
浸漬長さ: 3.2
フラックス: ロジン7~10%含有メタノール液
半田温度: 230±5°C
半田浸漬時間: 3±0.5秒

- △ SOLDERABILITY
SOLDERABILITY 75% MIN WITH FOLLOWING CONDITION
IMMERSION DEPTH: 3.2
FLUX: METHANOL CONTAINING ROSIN 7~10%
SOLDER TEMPERATURE: 230±5°C
IMMERSION DURATION: 3±0.5 SECONDS

基板穴あけ寸法
PC BOARD HOLE DIMENSION

DIMENSIONS: 単位: 耗 mm		DWN T. SHINOHARA	150CT98	WIRE RANGE 総合電線断面積 -	INSULATION DIA 被覆外径 -
TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差 = ± 0.4		CHK K. BETSUI	150CT98	MATERIAL 材料 BRASS 黄銅 0.8	FINISH 仕上 PRE-TIN 鍍めつき
0-PLC ± 1-PLC ±0.1 2-PLC ±0.01 3-PLC ±0.001 4-PLC ±0.0001 ANGLES ±1°00'		APVD K. BETSUI	150CT98		
PRODUCT SPEC 製品規格 NONE		APPLICATION SPEC 取付適用規格 -			
WEIGHT 0.043g		NAME 名称 250 SERIES P.C.B TAB (POSITIVE LOCK TAB) 250シリーズ P.C.B タブ (ポジティブロック リセ)		SIZE A4	CAGE CODE 00779
CUSTOMER DRAWING		DRAWING NO 番号 C-170267		RESTRICTED TO -	
SCALE 尺度 5:1		SHEET 1		OF 1	
		REV BI			