

METRIC - "SNAP-IN" PC SCREW TERMINALS



SPECIFICATIONS
Rated: 15 Amps
Terminal: 0.81 thick Brass, Tin Plate
Binding Head Screw: Brass, Nickel Plate

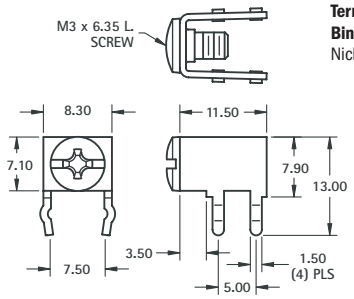


Mounting Detail



CAT. NO. 7790 (Supplied Less Screw)
CAT. NO. 7689 (Screw Supplied Unassembled)
CAT. NO. 7695 (Screw Installed & Captivated)


M3 HORIZONTAL



M3 VERTICAL



Mounting Detail



CAT. NO. 7788 (Supplied Less Screw)
CAT. NO. 7698 (Screw Supplied Unassembled)
CAT. NO. 7696 (Screw Installed & Captivated)

NOTE: All dimensions are in millimeters


LOW PROFILE SCREW TERMINALS

These sturdy, low cost screw terminals, feature an anti-rotation tab for use with spade terminals. They are available with the screw installed and captivated, the screw unassembled or without a screw.



6-32


PRINCIPLE FEATURES
- Easy to connect using solid or stranded wire, crimp lugs or terminals
- Anti-rotation tab for use with spade terminals
- Supplied with screw installed and captivated, with screw unassembled, or without screw
- Stainless steel screw will not wick



SPECIFICATIONS
Rated: 15 Amps
Terminal: .032 (.81) thick Brass, Tin Plate
Screw: Combination drive, Stainless Steel


CAT. NO. 1284 (Supplied Less Screw)
CAT. NO. 1298 (Screw Supplied Unassembled)
CAT. NO. 1201 (Screw Installed & Captivated)

Mounting Detail






10-32



SPECIFICATIONS
Rated: 30 Amps
Terminal: .062 (1.6) thick Brass, Tin Plate
Screw: Combination drive, Stainless Steel

CAT. NO. 1293 (Supplied Less Screw)
CAT. NO. 1299 (Screw Supplied Unassembled)
CAT. NO. 1202 (Screw Installed & Captivated)

Mounting Detail




HEAVY DUTY SCREW TERMINALS

These heavy duty terminals are available with the screw installed or unassembled, and feature easy access to connect solid or stranded wire, crimp type lugs or terminals.



8-32


PRINCIPLE FEATURES
- Anti-rotation tab for use with spade terminals
- Below the board notched leg, to facilitate mechanical and solder connections
- Easy to connect using solid or stranded wire, crimp lugs or terminals
- Available with screw installed, unassembled, or without screw

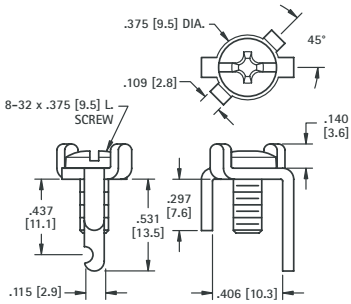

SPECIFICATIONS
Rated: 15 Amps
Terminal: .064 (1.6) thick Brass, Tin Plate
Screw: Brass, Nickel Plate


CAT. NO. 1205 (Supplied Less Screw)
CAT. NO. 1207 (Screw Supplied Unassembled)
CAT. NO. 1209 (Screw Installed)

Mounting Detail






10-32

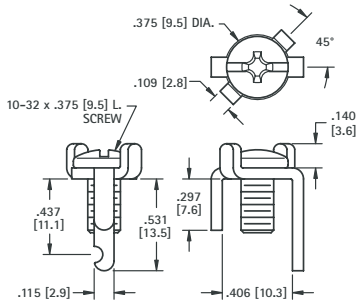

SPECIFICATIONS
Rated: 30 Amps
Terminal: .064 (1.6) thick Brass, Tin Plate
Screw: Steel, Nickel Plate

CAT. NO. 1206 (Supplied Less Screw)
CAT. NO. 1208 (Screw Supplied Unassembled)
CAT. NO. 1283 (Screw Installed)

Mounting Detail



Tel (718) 956-8900 • Fax (718) 956-9040
(800) 221-5510 • kec@keyelco.com
KEYSTONE®
RoHS COMPLIANT ~ ISO 9001 CERTIFIED
www.keyelco.com
31-07 20th Road - Astoria, NY 11105-2017