



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -,- .
© COPYRIGHT - By - ALL RIGHTS RESERVED.


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	B1	REVISED PER ECR-21-006029	02SEP2021	VG	PO

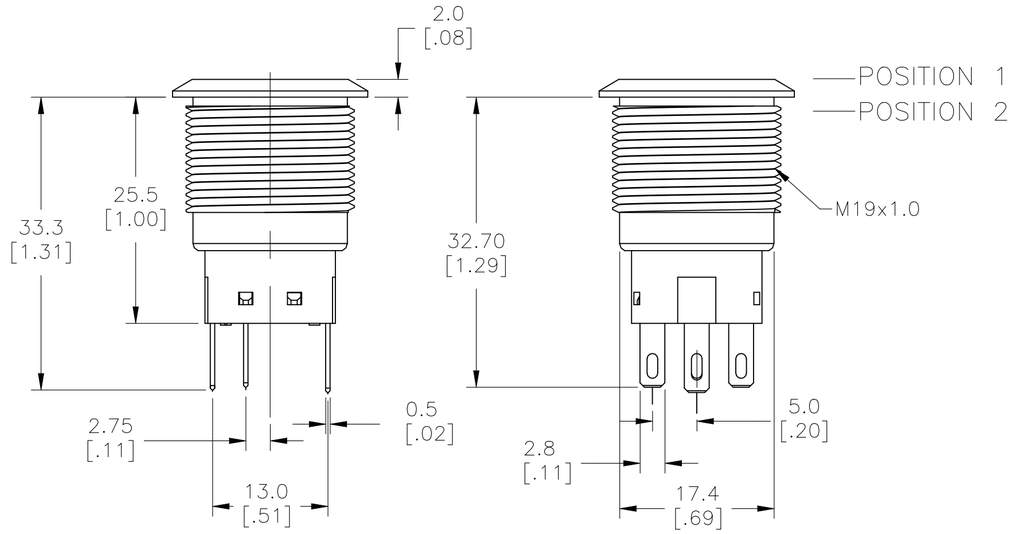


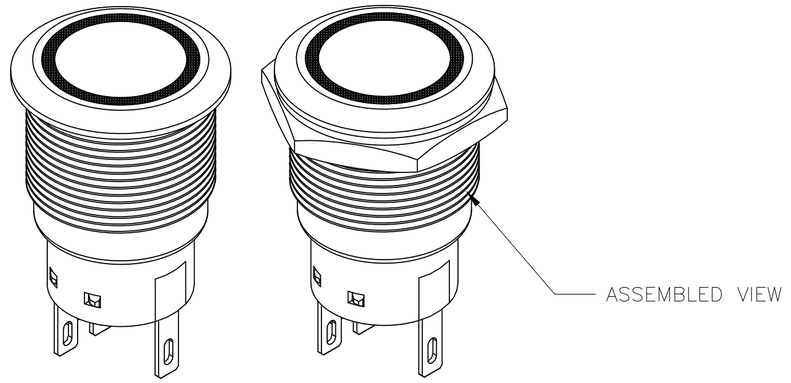

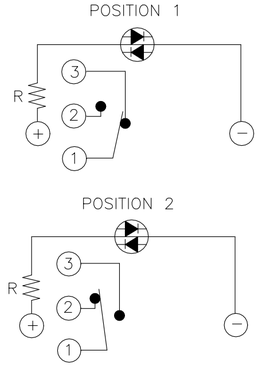




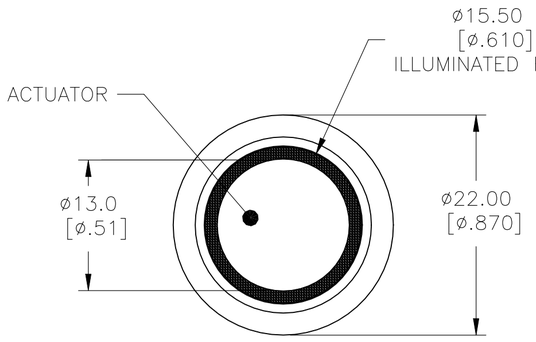

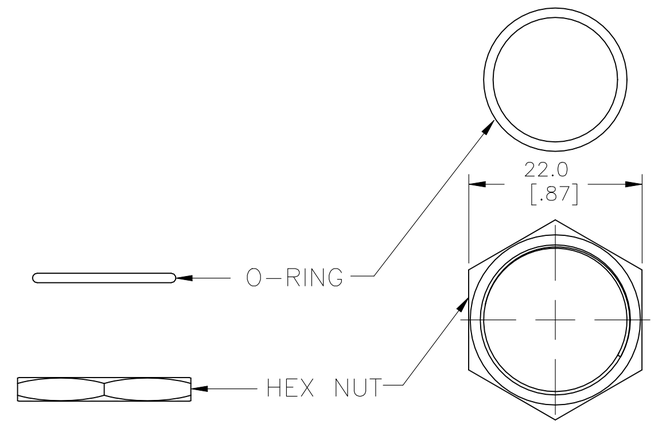

EXPLODED VIEW

ASSEMBLED VIEW



PANEL CUTOUT
MAX.PANEL THICKNESS:10.0[.394]

SPECIFICATIONS

CONTACT RATING: SILVER: 3A @ 250 VAC RESISTIVE
GOLD: 0.4VA @ 20VDC OR PEAK AC
INSULATION RESISTANCE: 1,000MΩ MIN AT 500VDC
DIELECTRIC STRENGTH: 2,000V RMS @ SEA LEVEL
CONTACT RESISTANCE: 50 mΩ MAX @ 1A 12VDC (INITIAL VALUE)
ELECTRICAL LIFECYCLES: 50,000 MAKE AND BREAK CYCLES
AT FULL LOAD

ACTUATION FORCE: SP: 2.5±1 NEWTON, DP: 3.5±1 NEWTON
ACTUATION TRAVEL: 3.2MM
SEALED PER IP67, IK10 (STAINLESS)
OPERATING TEMPERATURE: -20°C TO +55°C
MECHANICAL LIFECYCLES: MOMENTARY: 1,000,000 CYCLES
LOCKING: 500,000 CYCLES
HARDWARE TORQUE: 5-14 N-m

MATERIALS

BUSHING: STAINLESS STEEL
BASE: PBT (UL 94-V0), PC (UL 94-V2)
ACTUATOR: STAINLESS STEEL, PC
SEALING: O-RING (SILICONE)
TERMINAL/CONTACT: COPPER BASE, SILVER/GOLD PLATED
HEX NUT: BRASS BASE, NICKEL PLATED

1 ALL MATERIAL AND FINISHES SHALL COMPLY WITH EU DIRECTIVE 2002/95/EC OF 27JAN2003 (ROHS)

2213764

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± -
1 PLC ± -
2 PLC ± -
3 PLC ± -
4 PLC ± -
ANGLES ± -

MATERIAL -
FINISH -

DWN NAGALAKSHMI K 06FEB2016
CHK HILL RYAN 06FEB2016
APVD HILL RYAN 06FEB2016
PRODUCT SPEC —
APPLICATION SPEC —
WEIGHT 0

TE Connectivity

NAME ANTI-VANDAL SWITCH 19mm FIXED RING LED
—


SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	C-2213764	—


CUSTOMER DRAWING | SCALE 1:1 | SHEET 1 OF 4 | REV B1


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -,- .
© COPYRIGHT – By – ALL RIGHTS RESERVED.


REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	–	SEE SHEET 1	–	—	—

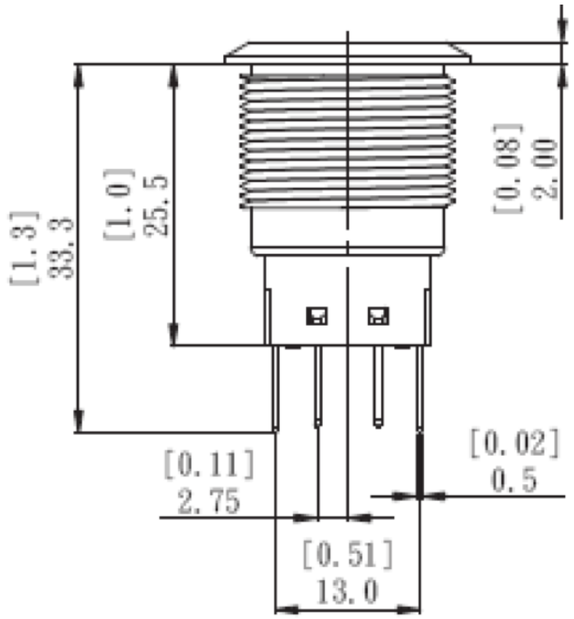


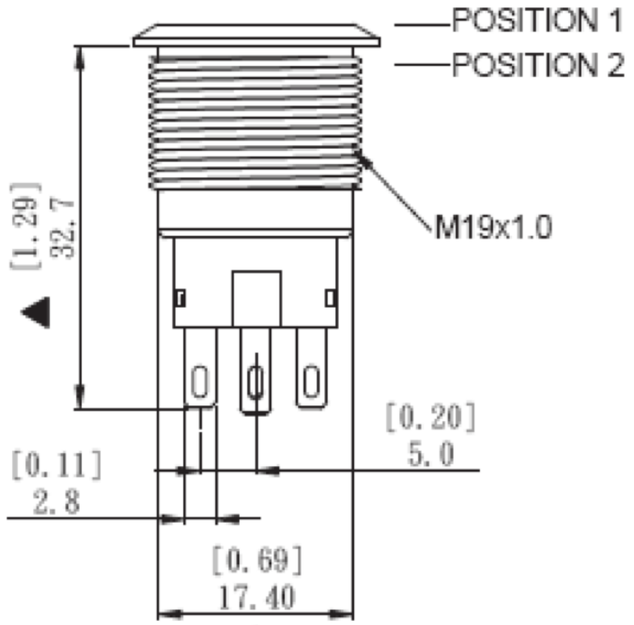

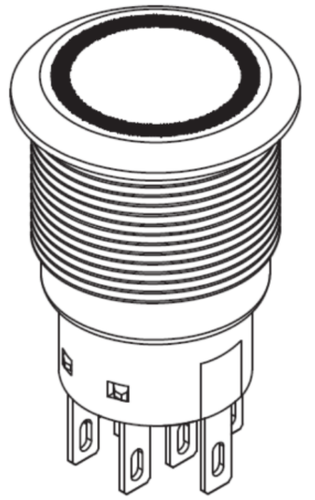


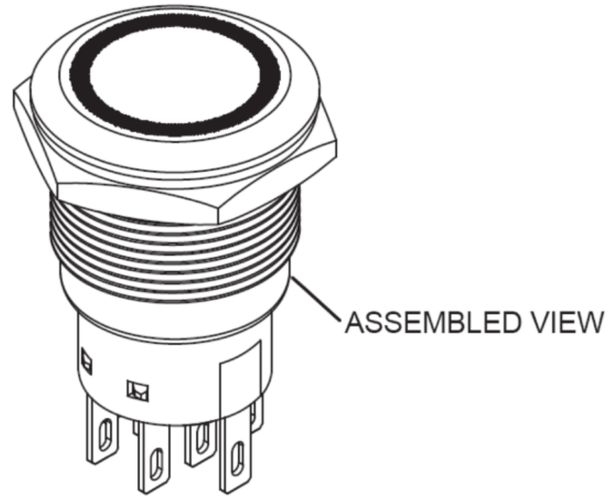


POSITION 1



POSITION 2



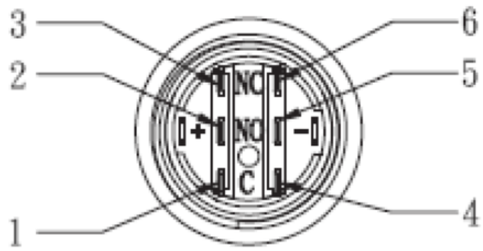

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN NAGALAKSHMI K 06FEB2016	TE Connectivity
DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± – 1 PLC ± – 2 PLC ± – 3 PLC ± – 4 PLC ± – ANGLES ± –	CHK HILL RYAN 06FEB2016	NAME ANTI–VANDAL SWITCH 19MM FIXED RING LED
		APVD HILL RYAN 06FEB2016	
		PRODUCT SPEC —	
		APPLICATION SPEC —	SIZE A2 / CAGE CODE 00779 / DRAWING NO C-2213764 / RESTRICTED TO —
MATERIAL –	FINISH –	WEIGHT —	
		CUSTOMER DRAWING	SCALE 1:1 / SHEET 2 OF 4 / REV B1

2213764

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION –,– .
© COPYRIGHT – By – ALL RIGHTS RESERVED.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	–	SEE SHEET 1	–	—	—

SINGLE POLE–LOCKING	GOLD	BLUE	24V	AV1911R724R04	4–2213764–0
	SILVER	BLUE	24V	AV1911R724Q04	3–2213764–9
	GOLD	BLUE	12V	AV1911R712R04	3–2213764–8
	SILVER	BLUE	12V	AV1911R712Q04	3–2213764–7
	GOLD	GREEN	24V	AV1911R624R04	3–2213764–6
	SILVER	GREEN	24V	AV1911R624Q04	3–2213764–5
	GOLD	GREEN	12V	AV1911R612R04	3–2213764–4
	SILVER	GREEN	12V	AV1911R612Q04	3–2213764–3
	GOLD	YELLOW	24V	AV1911R524R04	3–2213764–2
	SILVER	YELLOW	24V	AV1911R524Q04	3–2213764–1
	GOLD	YELLOW	12V	AV1911R512R04	3–2213764–0
	SILVER	YELLOW	12V	AV1911R512Q04	2–2213764–9
	GOLD	RED	24V	AV1911R324R04	2–2213764–8
	SILVER	RED	24V	AV1911R324Q04	2–2213764–7
	GOLD	RED	12V	AV1911R312R04	2–2213764–6
	SILVER	RED	12V	AV1911R312Q04	2–2213764–5
	GOLD	WHITE	24V	AV1911R124R04	2–2213764–4
	SILVER	WHITE	24V	AV1911R124Q04	2–2213764–3
	GOLD	WHITE	12V	AV1911R112R04	2–2213764–2
	SILVER	WHITE	12V	AV1911R112Q04	2–2213764–1
SINGLE POLE–MOMENTARY	GOLD	BLUE	24V	AV1910R724R04	2–2213764–0
	SILVER	BLUE	24V	AV1910R724Q04	1–2213764–9
	GOLD	BLUE	12V	AV1910R712R04	1–2213764–8
	SILVER	BLUE	12V	AV1910R712Q04	1–2213764–7
	GOLD	GREEN	24V	AV1910R624R04	1–2213764–6
	SILVER	GREEN	24V	AV1910R624Q04	1–2213764–5
	GOLD	GREEN	12V	AV1910R612R04	1–2213764–4
	SILVER	GREEN	12V	AV1910R612Q04	1–2213764–3
	GOLD	YELLOW	24V	AV1910R524R04	1–2213764–2
	SILVER	YELLOW	24V	AV1910R524Q04	1–2213764–1
	GOLD	YELLOW	12V	AV1910R512R04	1–2213764–0
	SILVER	YELLOW	12V	AV1910R512Q04	2213764–9
	GOLD	RED	24V	AV1910R324R04	2213764–8
	SILVER	RED	24V	AV1910R324Q04	2213764–7
	GOLD	RED	12V	AV1910R312R04	2213764–6
	SILVER	RED	12V	AV1910R312Q04	2213764–5
	GOLD	WHITE	24V	AV1910R124R04	2213764–4
	SILVER	WHITE	24V	AV1910R124Q04	2213764–3
	GOLD	WHITE	12V	AV1910R112R04	2213764–2
	SILVER	WHITE	12V	AV1910R112Q04	2213764–1
POLE/THROW	CONTACT	LED COLOR	LED VOLTAGE	TE DESCRIPTIVE PN	TE PART NUMBER

2213764

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± –
2 PLC ± –
3 PLC ± –
4 PLC ± –
ANGLES ± –

MATERIAL –

FINISH –

DWN NAGALAKSHMI K 06FEB2016
CHK HILL RYAN 06FEB2016
APVD HILL RYAN 06FEB2016
PRODUCT SPEC —
APPLICATION SPEC —
WEIGHT —

TE Connectivity

NAME
ANTI–VANDAL SWITCH 19MM
FIXED RING LED

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	C–2213764	—

CUSTOMER DRAWING | SCALE 1:1 | SHEET 3 OF 4 | REV B1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION –,– .
© COPYRIGHT – By – ALL RIGHTS RESERVED.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	–	SEE SHEET 1	–	—	—

POLE/THROW	CONTACT	LED COLOR	LED VOLTAGE	TE DESCRIPTIVE PN	TE PART NUMBER
DOUBLE POLE–LOCKING	GOLD	BLUE	24V	AV1921R724R04	8–2213764–0
	SILVER	BLUE	24V	AV1921R724Q04	7–2213764–9
	GOLD	BLUE	12V	AV1921R712R04	7–2213764–8
	SILVER	BLUE	12V	AV1921R712Q04	7–2213764–7
	GOLD	GREEN	24V	AV1921R624R04	7–2213764–6
	SILVER	GREEN	24V	AV1921R624Q04	7–2213764–5
	GOLD	GREEN	12V	AV1921R612R04	7–2213764–4
	SILVER	GREEN	12V	AV1921R612Q04	7–2213764–3
	GOLD	YELLOW	24V	AV1921R524R04	7–2213764–2
	SILVER	YELLOW	24V	AV1921R524Q04	7–2213764–1
	GOLD	YELLOW	12V	AV1921R512R04	7–2213764–0
	SILVER	YELLOW	12V	AV1921R512Q04	6–2213764–9
	GOLD	RED	24V	AV1921R324R04	6–2213764–8
	SILVER	RED	24V	AV1921R324Q04	6–2213764–7
	GOLD	RED	12V	AV1921R312R04	6–2213764–6
	SILVER	RED	12V	AV1921R312Q04	6–2213764–5
	GOLD	WHITE	24V	AV1921R124R04	6–2213764–4
	SILVER	WHITE	24V	AV1921R124Q04	6–2213764–3
	GOLD	WHITE	12V	AV1921R112R04	6–2213764–2
	SILVER	WHITE	12V	AV1921R112Q04	6–2213764–1
DOUBLE POLE–MOMENTARY	GOLD	BLUE	24V	AV1920R724R04	6–2213764–0
	SILVER	BLUE	24V	AV1920R724Q04	5–2213764–9
	GOLD	BLUE	12V	AV1920R712R04	5–2213764–8
	SILVER	BLUE	12V	AV1920R712Q04	5–2213764–7
	GOLD	GREEN	24V	AV1920R624R04	5–2213764–6
	SILVER	GREEN	24V	AV1920R624Q04	5–2213764–5
	GOLD	GREEN	12V	AV1920R612R04	5–2213764–4
	SILVER	GREEN	12V	AV1920R612Q04	5–2213764–3
	GOLD	YELLOW	24V	AV1920R524R04	5–2213764–2
	SILVER	YELLOW	24V	AV1920R524Q04	5–2213764–1
	GOLD	YELLOW	12V	AV1920R512R04	5–2213764–0
	SILVER	YELLOW	12V	AV1920R512Q04	4–2213764–9
	GOLD	RED	24V	AV1920R324R04	4–2213764–8
	SILVER	RED	24V	AV1920R324Q04	4–2213764–7
	GOLD	RED	12V	AV1920R312R04	4–2213764–6
	SILVER	RED	12V	AV1920R312Q04	4–2213764–5
	GOLD	WHITE	24V	AV1920R124R04	4–2213764–4
	SILVER	WHITE	24V	AV1920R124Q04	4–2213764–3
	GOLD	WHITE	12V	AV1920R112R04	4–2213764–2
	SILVER	WHITE	12V	AV1920R112Q04	4–2213764–1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± –
2 PLC ± –
3 PLC ± –
4 PLC ± –
ANGLES ± –

MATERIAL –

FINISH –

DWN NAGALAKSHMI K 06FEB2016
CHK HILL RYAN 06FEB2016
APVD HILL RYAN 06FEB2016
PRODUCT SPEC —
APPLICATION SPEC —
WEIGHT —

TE Connectivity

NAME
ANTI–VANDAL SWITCH 19MM
FIXED RING LED

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	C–2213764	—

CUSTOMER DRAWING | SCALE 1:1 | SHEET 4 OF 4 | REV B1

2213764