



© 2025 TE Connectivity. All Rights Reserved.


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL	05MAR2015	DW	CW
	B	ECR-15-015267	22OCT2015	DW	CW
	C	ECR-21-111798	03SEP2021	WQR	CW
	D	ECR-25-246912	27JUN2025	ABS	RB

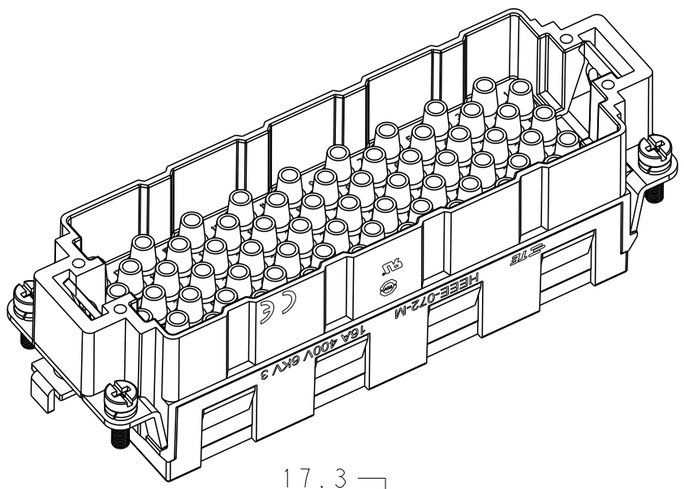


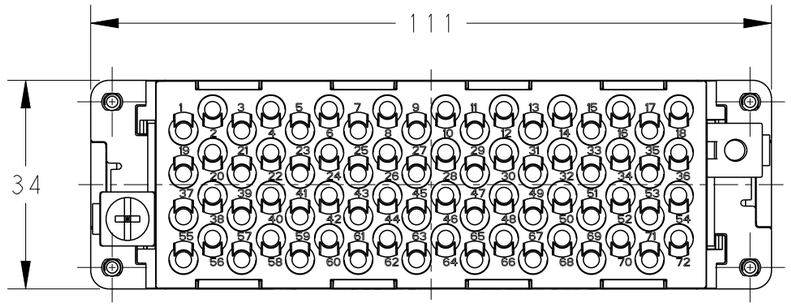

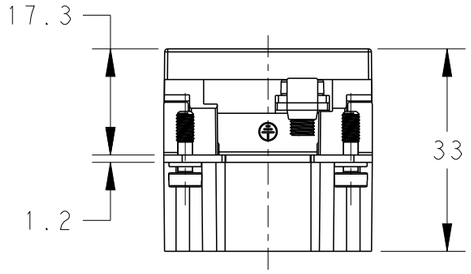

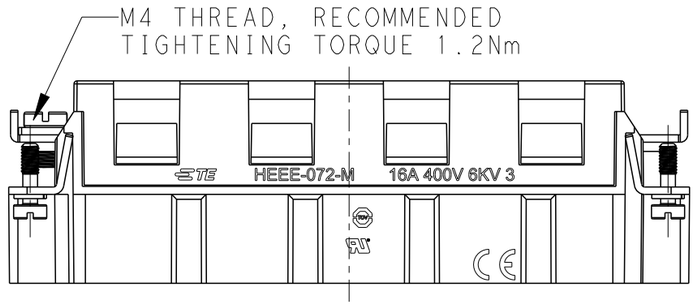

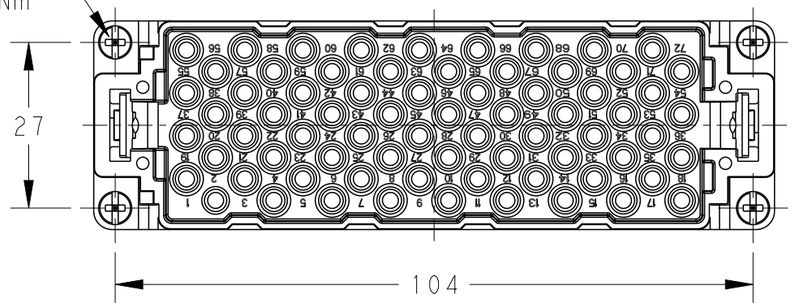

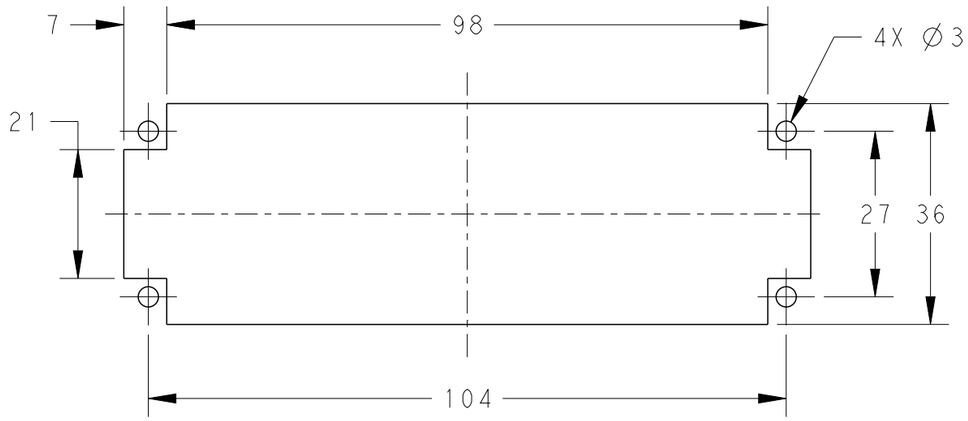

NOTES:
1. TECHNICAL CHARACTERISTICS:
   INSULATION MATERIAL: PC
   RATED VOLTAGE: 400V
   RATED CURRENT: 16A
   INSULATION RESISTANCE: >=400MΩ
   RATED IMPULSE VOLTAGE: 6KV
   POLLUTION DEGREE: 3
   FLAMMABILITY: UL94V-0
   MATING CYCLES: 500 CYCLES
   OPERATION TEMPERATURE: -40°C~+125°C
   WIRE RANGE: 0.14mm²~4mm² (AWG26-AWG12)
   CONTACT TYPE: CRIMP CONTACT
2. CONTACTS NEED TO BE ORDERED SEPARATELY.
   (ORDER No. REFER TO DRAWING: T20300X10XX000)

注释：
1. 技术参数：
   绝缘材料：PC
   额定电压：400V
   额定电流：16A
   绝缘电阻：>=400MΩ
   脉冲电压：6KV
   污染等级：3
   阻燃等级：UL94V-0
   插拔次数：500次
   工作温度：-40°C~+125°C
   接线范围：0.14mm²~4mm² (AWG26-AWG12)
   接线类型：冷压接
2. 端子需要单独订购。
   （订货号参考图面：T20300X10XX000）

HEEE-072-M	T2050722101-000
DESCRIPTION	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:
mm	0 PLC ±- 1 PLC ±- 2 PLC ±- 3 PLC ±- 4 PLC ±- ANGLES ±-
MATERIAL - -	FINISH - -

DWN	David Wang 05MAR2015
CHK	Chris Wang 05MAR2015
APVD	Xiang Xu 05MAR2015
PRODUCT SPEC	108-137068
APPLICATION SPEC	114-137068
WEIGHT	-

TE Connectivity

NAME HEEE-072-M

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-T2050722101000	-

CUSTOMER DRAWING | SCALE 1:1 | SHEET 1 OF 1 | REV D