

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -.-.
© COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.


LOC	DIST
AD	00

REVISIONS


P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	REV PER 0G3C-0321-00	31JUL00	BH	MM

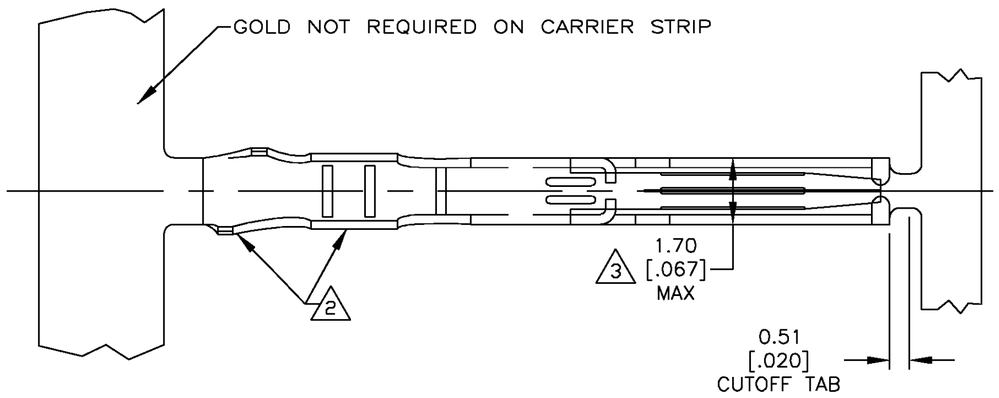

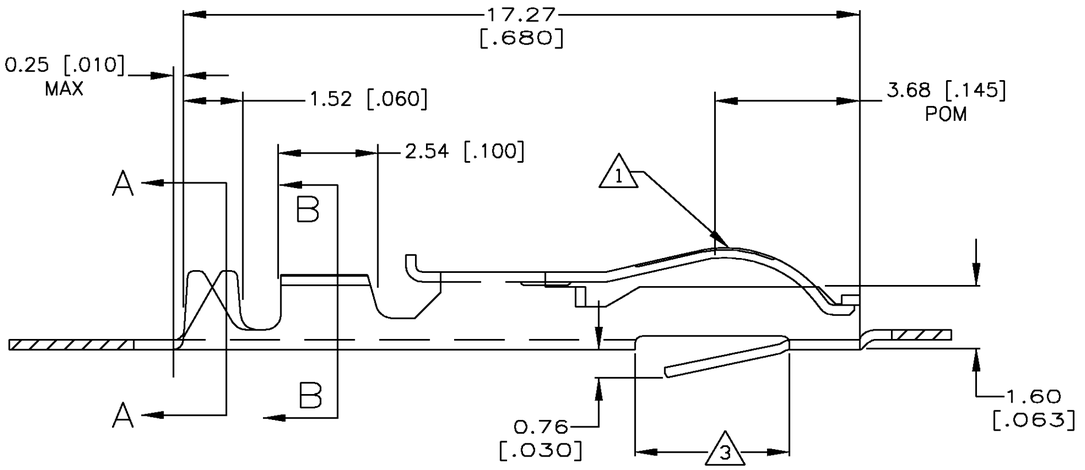


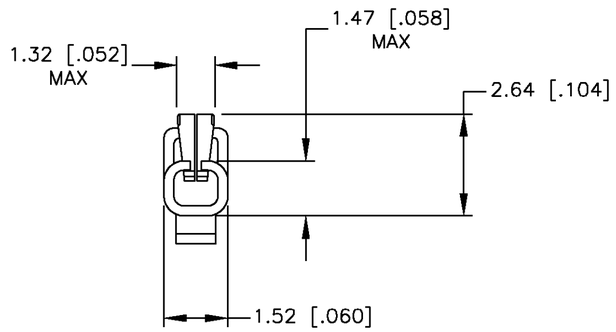

1. 0.76µm [.000030] MIN GOLD OVER 0.76µm [.000030] MIN NICKEL IN CONTACT AREA.
2. TIN-LEAD IN CRIMP AREA.
3. .067 MAX ALLOWED IN LOCKING LANCE AREA.
4. REEL QUANTITY = 7000 PIECES.

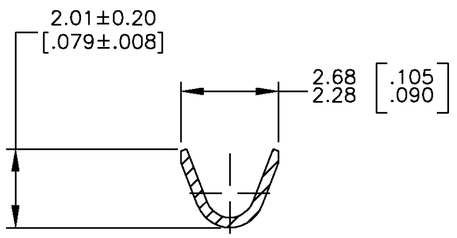

SECTION A-A
INSULATION RANGE
.060-.048 DIA

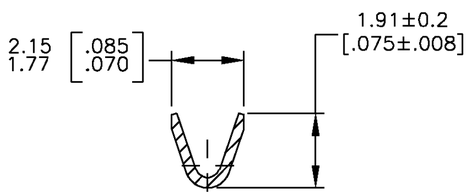

SECTION B-B
WIRE RANGE
#20 AWG

147439

147439-2
PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± -
1 PLC ± -
2 PLC ± 0.13 [.005]
3 PLC ± -
4 PLC ± -
ANGLES ± -

MATERIAL BERYLLIUM COPPER
FINISH 1 2

DWN R BROWN 31JUL00
CHK M.MILLER 14 JUN 00
APVD M.MILLER 14 JUN 00
PRODUCT SPEC -
APPLICATION SPEC -
WEIGHT -
CUSTOMER DRAWING

AMP Tyco Electronics Corporation
Harrisburg, PA 17105

NAME CONTACT, CRIMP-SNAP, 20 AWG, TWIN LEAF -

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	C-147439	-

SCALE 10:1 SHEET 1 OF 1 REV A