
THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
© COPYRIGHT 20 BY - ALL RIGHTS RESERVED.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	REVISED AS PER ECR-15-005925	21APR2015	RS	JL
	B	REVISED AS PER ECR-15-011156	31JUL2015	RS	JL

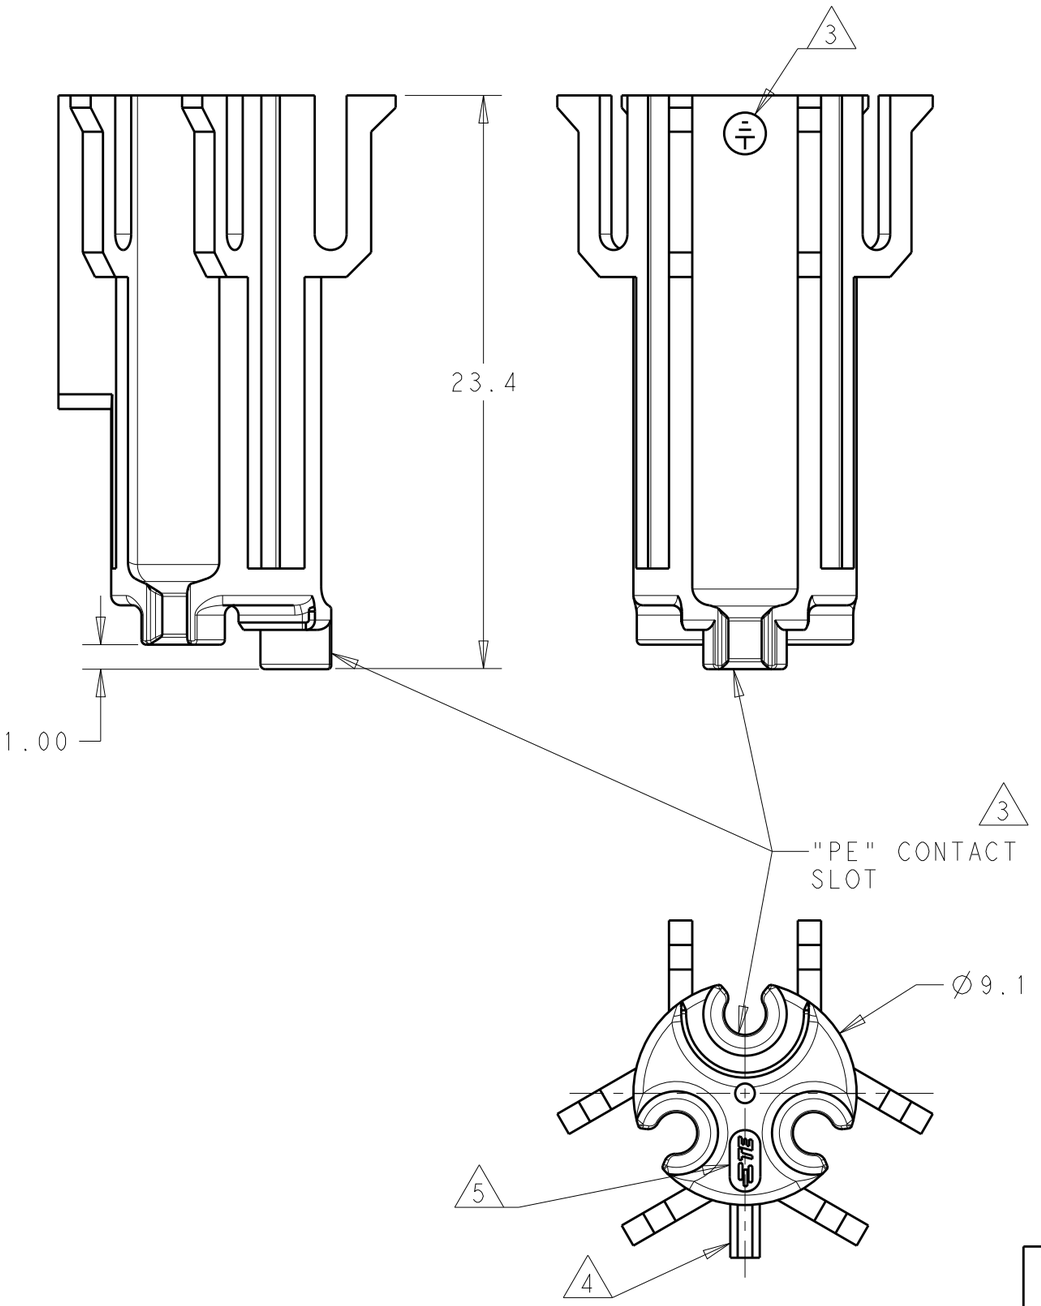

NOTES:


1. MATERIAL: GLASS FILLED PBT, COLOR BLACK
2. MUST COMPLY WITH DIRECTIVE 2002/95/EC (ROHS).

△3 "PE" SYMBOL IDENTIFIES "PE" CONTACT SLOT.

△4 ASSEMBLY "KEY" ALIGNS WITH "PE" CONTACT SLOT AS SHOWN.

△5 TE LOGO

6. THIS PRODUCT HAS NOT COMPLETED VALIDATION TESTING.

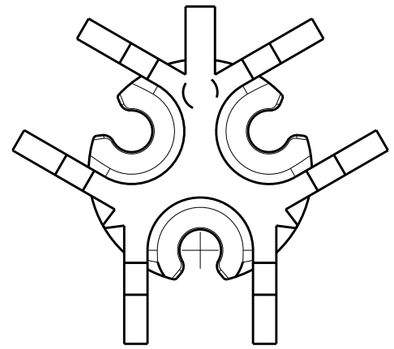

1-2213396-1
SHOWN

UL + IEC (DEKRA)	1-2213396-1
AGENCY APPROVALS	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±-
1 PLC ±0.2
2 PLC ±0.13
3 PLC ±-
4 PLC ±-
ANGLES ±

MATERIAL: SEE NOTE
FINISH: - -

DWN J.SHAFFER 31MAR2014
CHK M.LUKSIC 31MAR2014
APVD M.LUKSIC 31MAR2014
PRODUCT SPEC 108-133014
APPLICATION SPEC 114-32111
WEIGHT -

TE Connectivity

NAME
POSITIONER FOR CONTACTS
NECTOR M-LINE; 3 POSITION
-

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	-	C-2213396	-

Customer Drawing | SCALE 2:1 | SHEET 1 OF 1 | REV B