

4

3

2

1


LOC	DIST	REVISIONS					
FT	0	P	LTR	DESCRIPTION	DATE	DWN	APVD
			A3	REVISED PER ECO-11-016150	09AUG11	HMR	MS

MATERIALS:
HOUSING: POLYAMIDE 66, UL94V-0, GREEN.
CONTACT: PHOSPHOR BRZ, TIN PLATED.
CAGE CLAMP: BRASS, NICKEL PLATED.
SCREW: STEEL, NICKEL PLATED.

ELECTRICAL:
CURRENT RATING: 10A, 300V.
INSULATION WITHSTANDS: 2000VAC MIN.
INSULATION RESISTANCE: 2000Mohm, 500VDC
WIRE STRIP LENGTH: 6.5mm
WIRE RANGE: 16-26 AWG.
SCREW TORQUE: 2.5 IN-LB

OPERATING TEMP.: -40°C TO +105°C.

- 1NON CUMLATIVE.
- 2TE LOGO LOCATED APPROXIMATE AREA SHOWN.

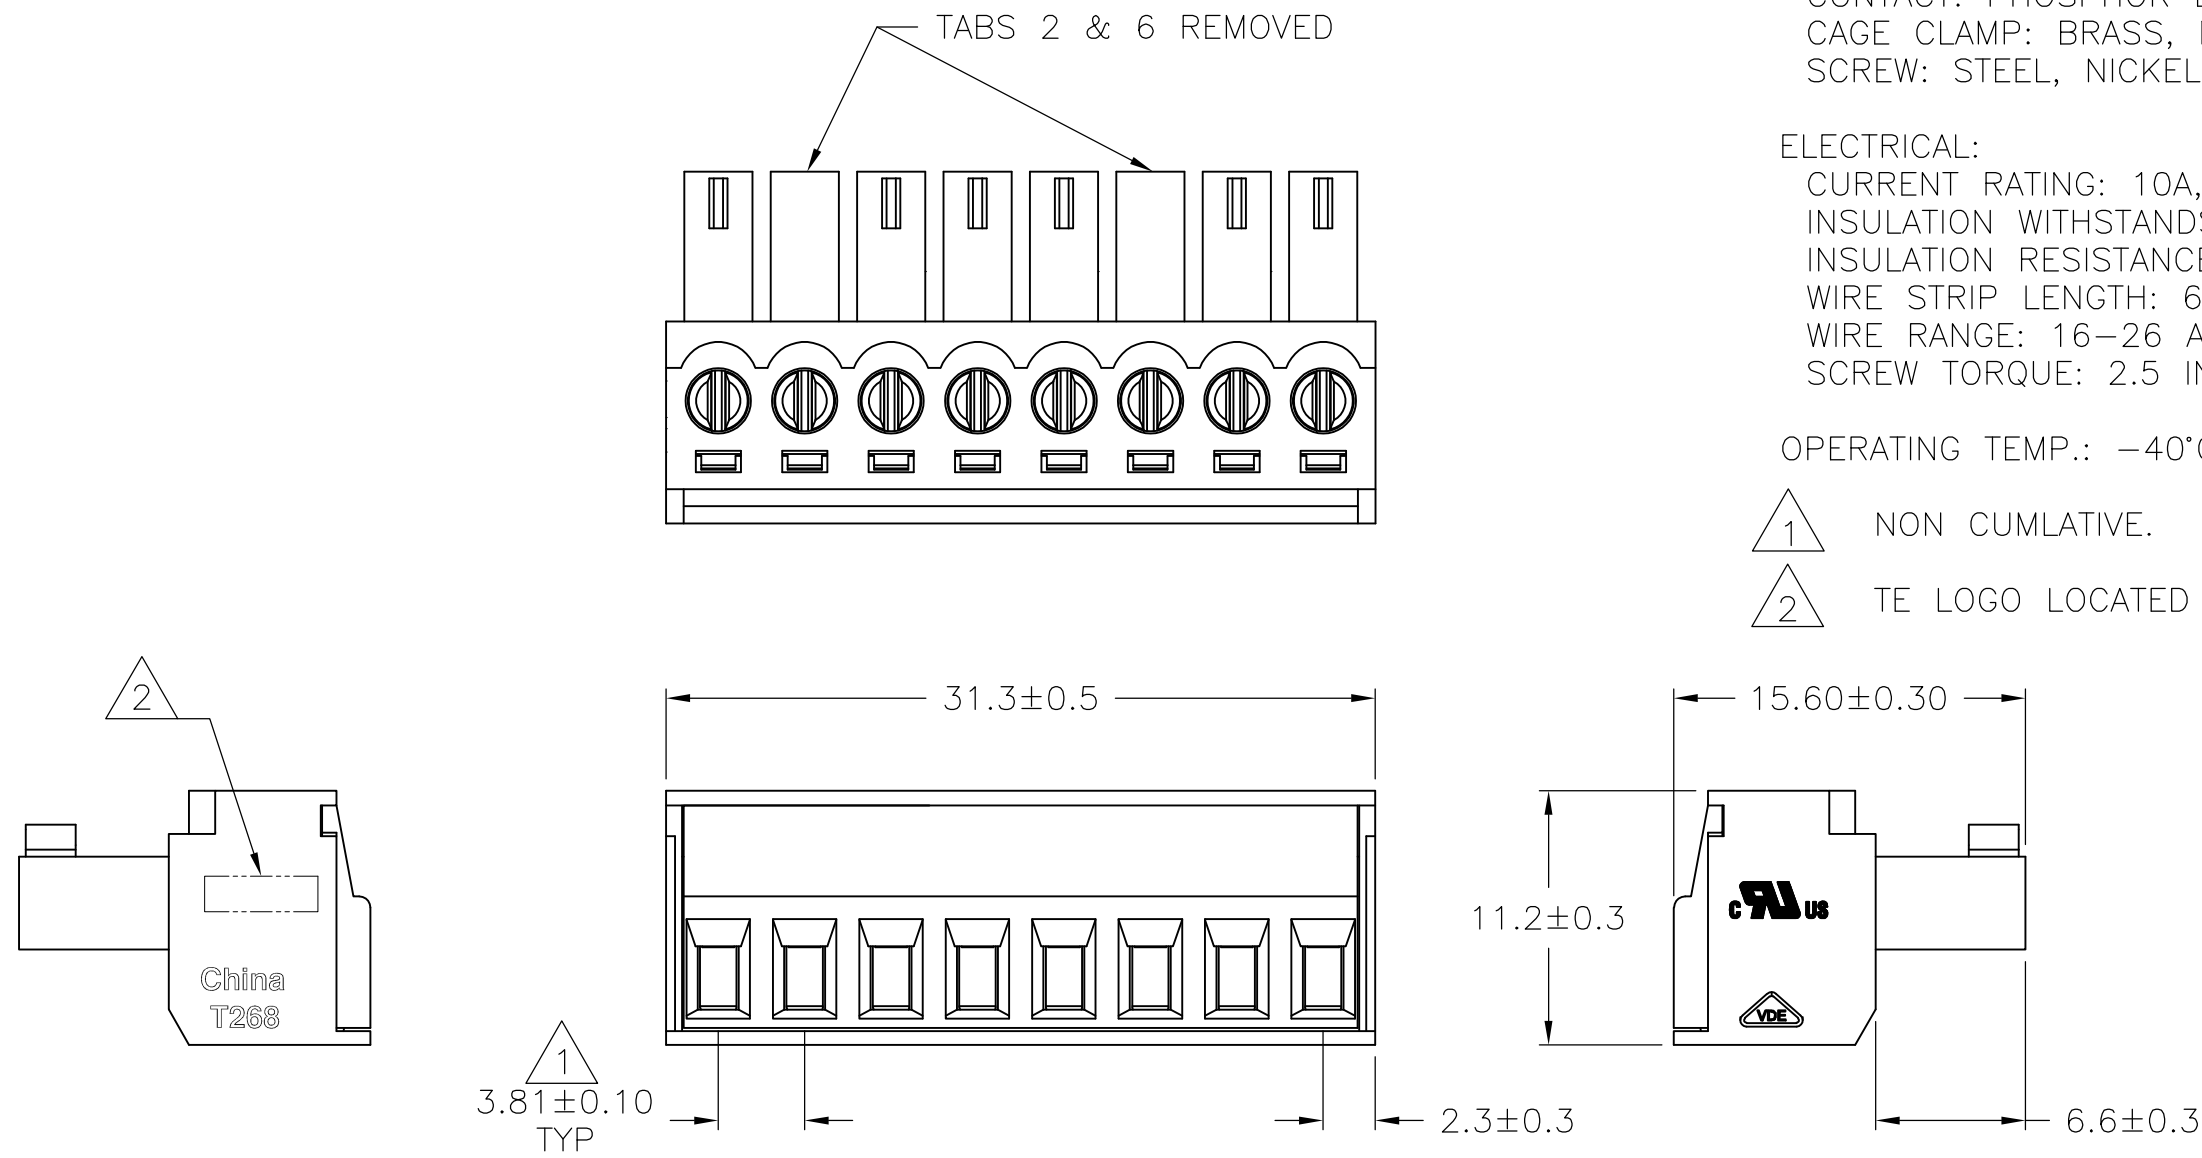

8	1776554-8
POSN	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S SCHLEGEL 06DEC2005	 TE Connectivity				
		CHK C RICHARD 12/6/05					
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD C RICHARD 12/6/05	NAME				
	0 PLC ± - 1 PLC ± 0.3 2 PLC ± 0.25 3 PLC ± - 4 PLC ± - ANGLES ± -	PRODUCT SPEC —	R/A PLUG, 3.81mm, KEYED				
		APPLICATION SPEC —					
		WEIGHT —					
MATERIAL —	FINISH —	SIZE A3			CAGE CODE 00779	DRAWING NO C-1776554	RESTRICTED TO —
CUSTOMER DRAWING					SCALE NTS	SHEET 1 OF 1	REV A3