



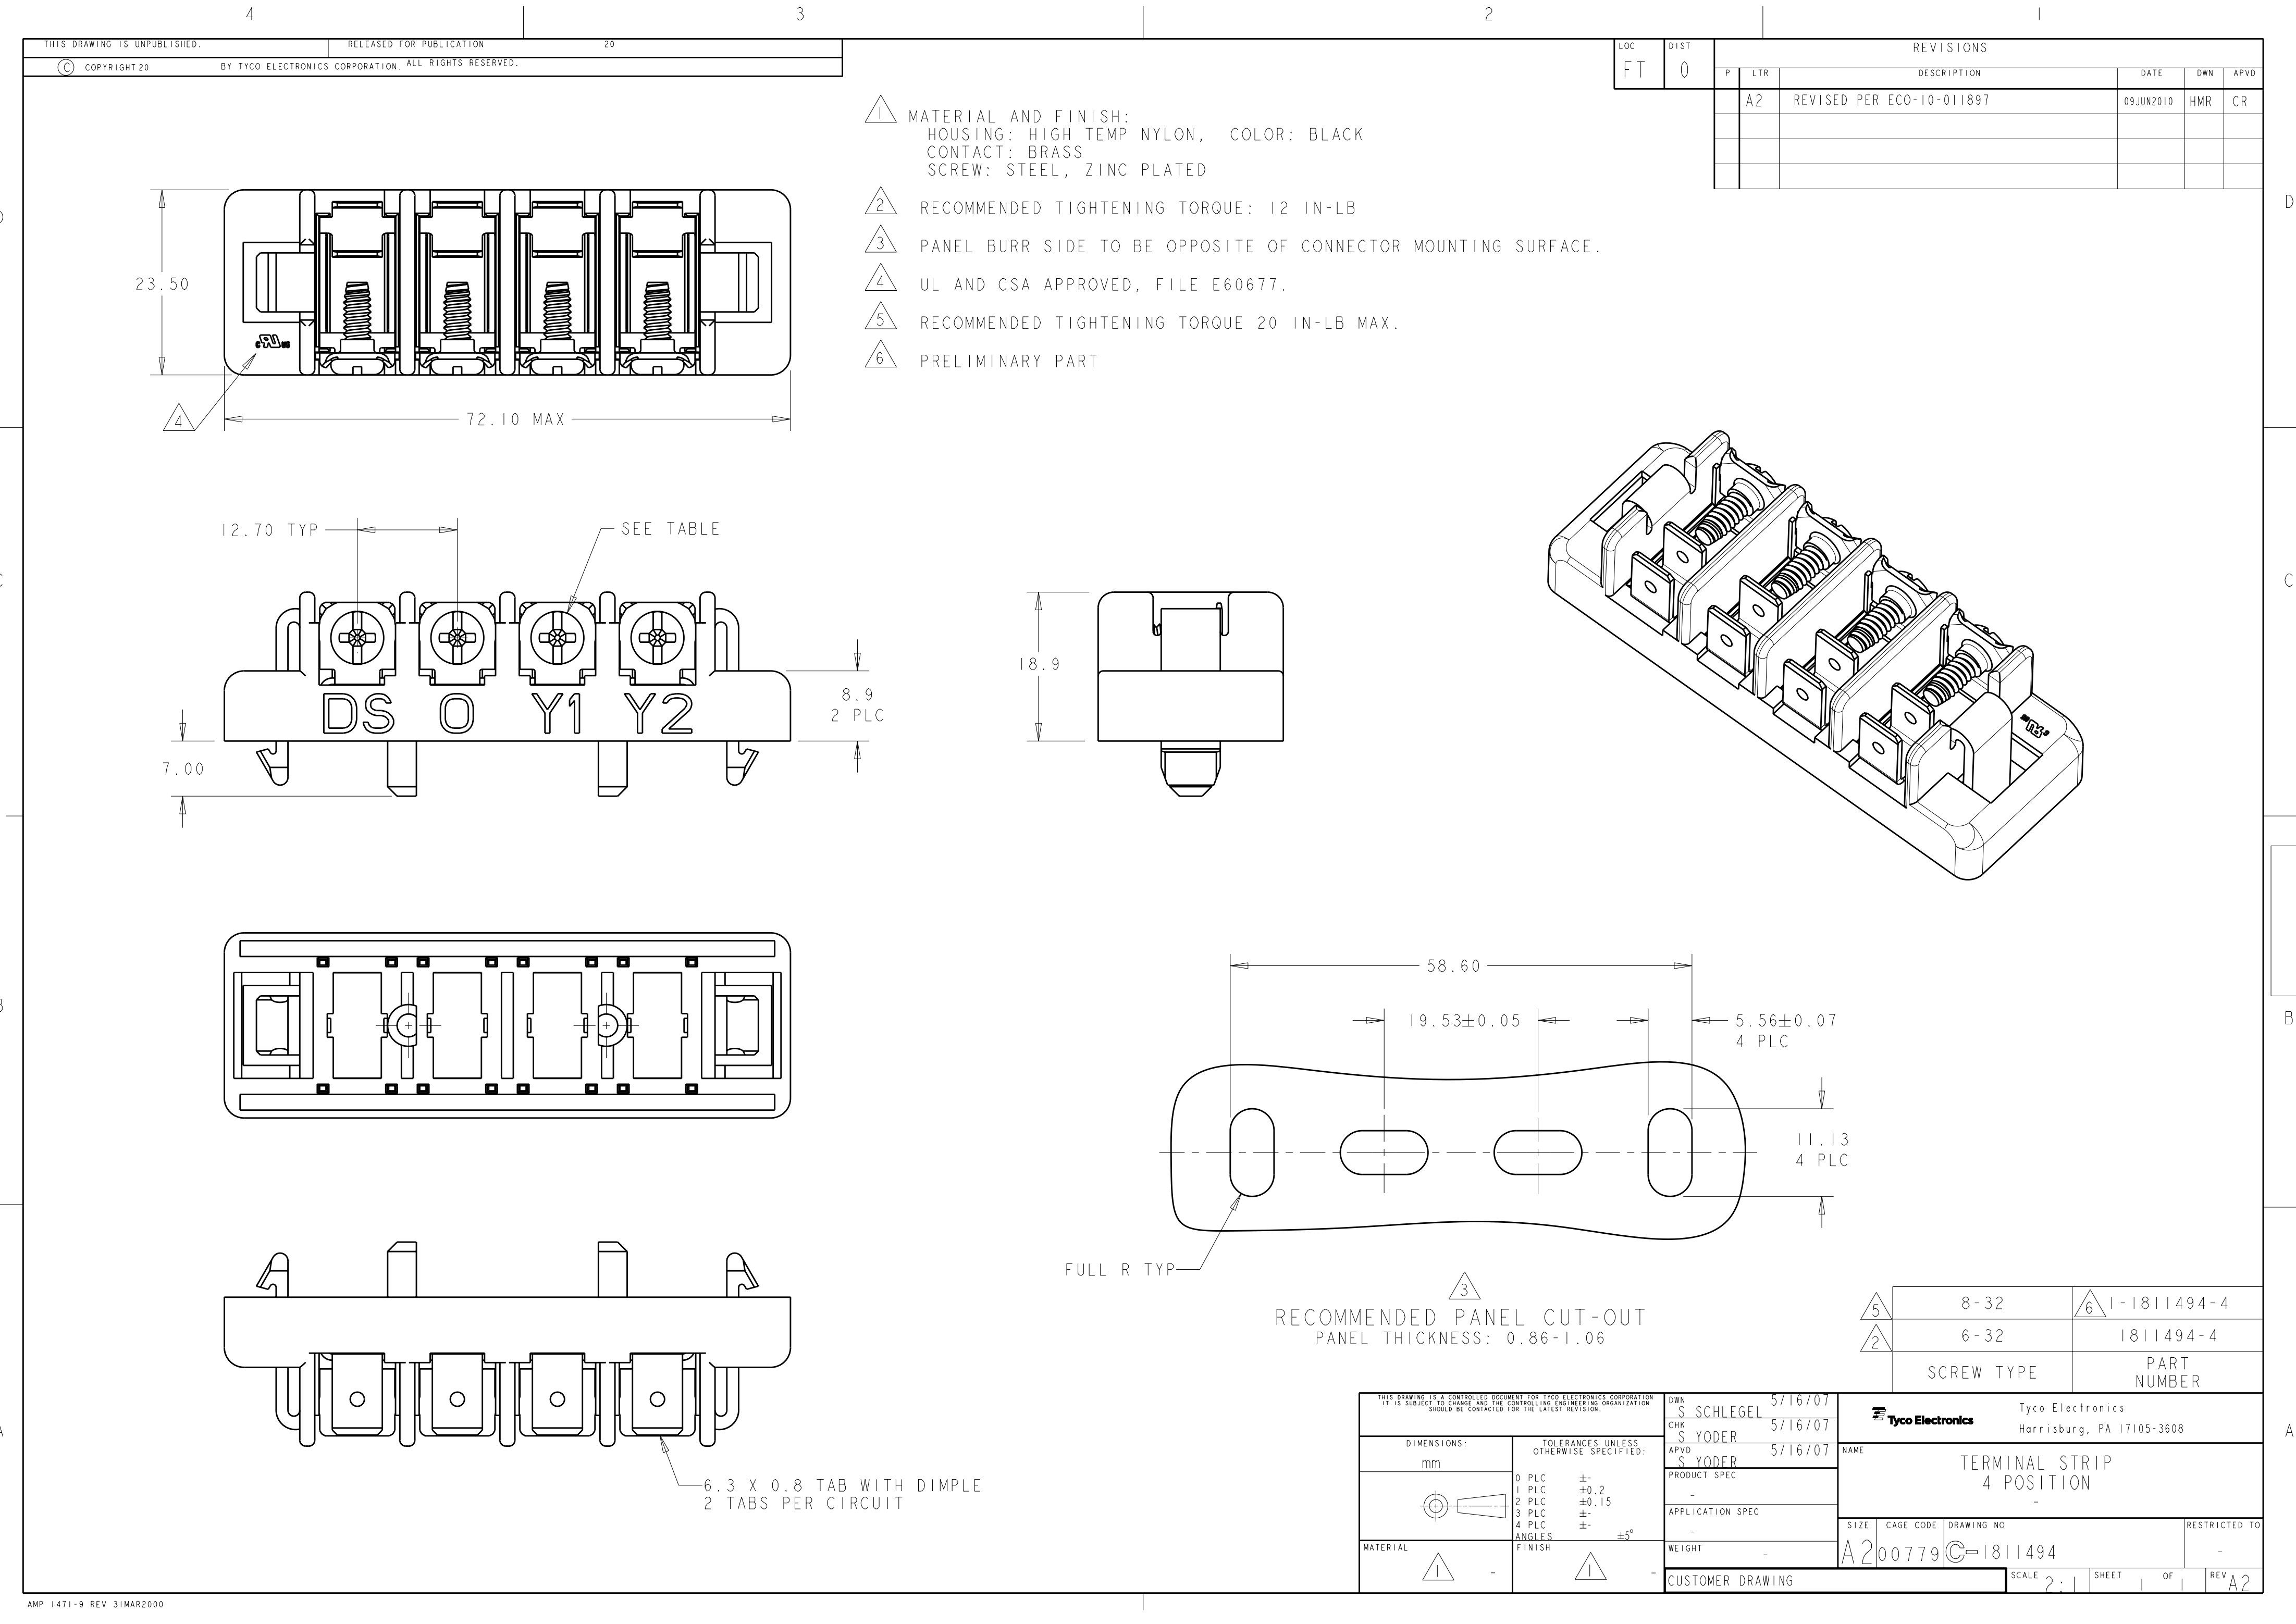

- 1 MATERIAL AND FINISH:
HOUSING: HIGH TEMP NYLON, COLOR: BLACK
CONTACT: BRASS
SCREW: STEEL, ZINC PLATED
- 2 RECOMMENDED TIGHTENING TORQUE: 12 IN-LB
- 3 PANEL BURR SIDE TO BE OPPOSITE OF CONNECTOR MOUNTING SURFACE.
- 4 UL AND CSA APPROVED, FILE E60677.
- 5 RECOMMENDED TIGHTENING TORQUE 20 IN-LB MAX.
- 6 PRELIMINARY PART

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
FT	0		A2	REVISED PER ECO-10-011897	09JUN2010	HMR	CR

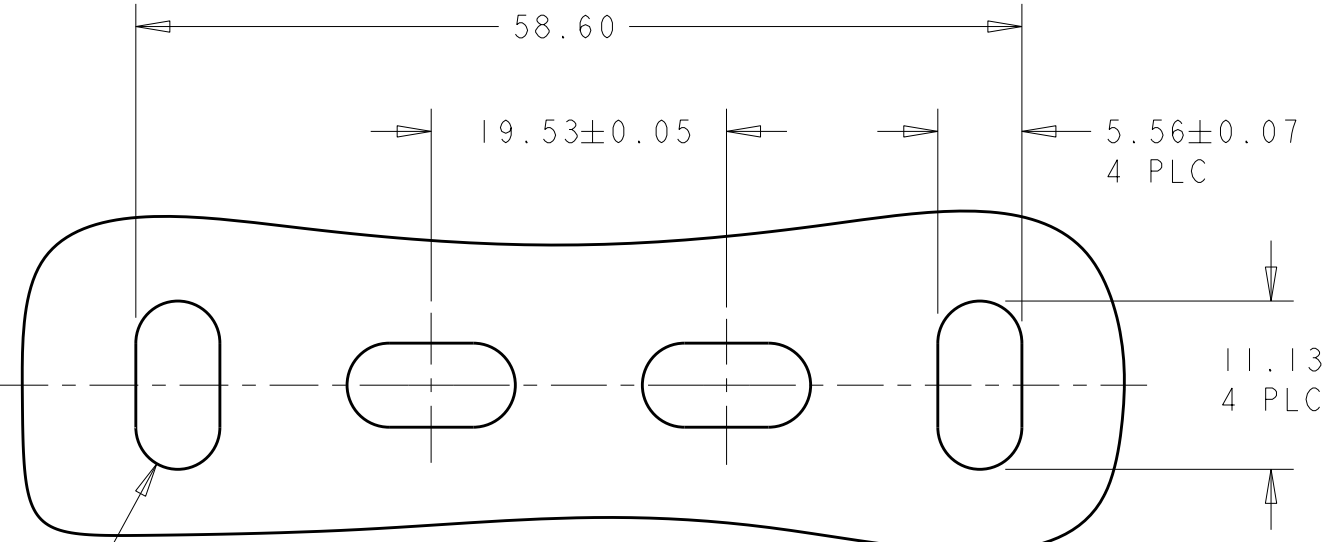

3
RECOMMENDED PANEL CUT-OUT
PANEL THICKNESS: 0.86-1.06

5	8-32	6	1-1811494-4
2	6-32		1811494-4
SCREW TYPE		PART NUMBER	

THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.				DWN	S SCHLEGEL 5/16/07		Tyco Electronics Harrisburg, PA 17105-3608								
				CHK	S YODER 5/16/07										
				APVD	S YODER 5/16/07		NAME TERMINAL STRIP 4 POSITION -								
				PRODUCT SPEC		-									
				APPLICATION SPEC		-		SIZE		CAGE CODE		DRAWING NO		RESTRICTED TO	
				WEIGHT		-									
				CUSTOMER DRAWING		A200779		C=1811494							
								SCALE		2:1		SHEET		1 OF	
												REV		A2	