


| REVISIONS |     |                           |           |     |      |
|-----------|-----|---------------------------|-----------|-----|------|
| P         | LTR | DESCRIPTION               | DATE      | DWN | APVD |
|           | AA7 | REVISED PER ECO-16-004223 | 19JUL2016 | NK  | MZ   |
|           | AB  | REVISED PER ECO-16-017881 | 16MAR2017 | BDA | MZ   |

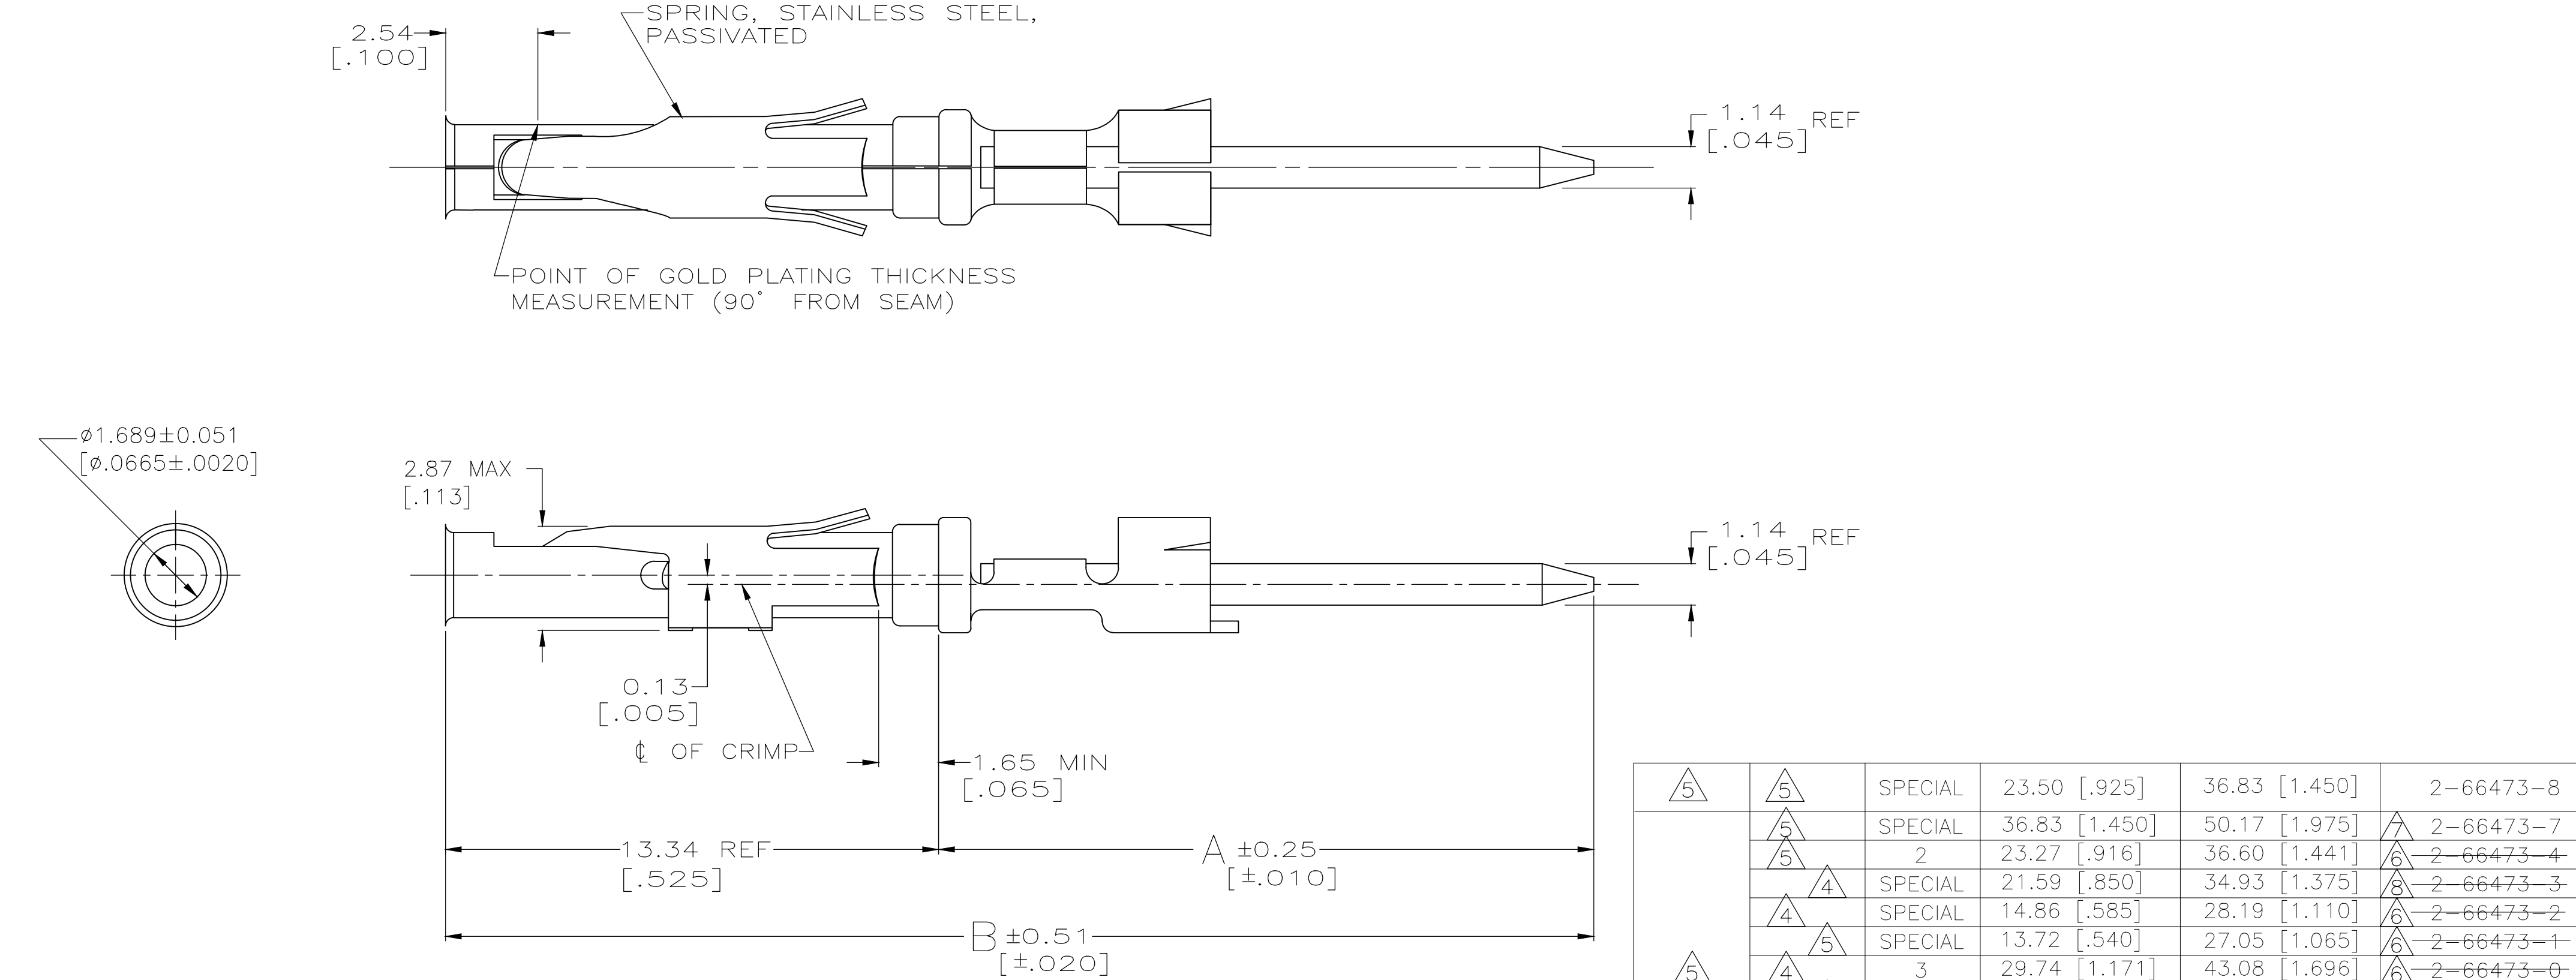

- 1
- GOLD PLATING NEED NOT APPEAR ON INSULATION SUPPORT STABILIZER.
- 2
- 2.54um [.000100] MIN TIN-LEAD PER 112-26-1 OVER 1.27um [.000050] MIN NICKEL PER 112-25-2.
- 3
- 2.54um [.000100] MIN TIN-LEAD OVER 1.27um [.000050] MIN NICKEL.
- 4
- 0.76um [.000030] MIN GOLD PER MIL-G-45204 ON MATING END FOR A LENGTH OF 5.08 [.200] MIN WITH A UNIFORM GRADIENT TO 0.25um [.000010] MIN GOLD PER MIL-G-45204 ON THE REMAINDER OVER 0.76um [.000030] MIN NICKEL PER QQ-N-290.
- 5
- 2.54um [.000100] MIN TIN OVER 1.27um [.000050] MIN NICKEL.
- 6
- OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI.
- 7
- PRELIMINARY PART.
- 8
- OBSOLETE PART.

|               |               |            |               |               |             |
|---------------|---------------|------------|---------------|---------------|-------------|
| 5             | 5             | SPECIAL    | 23.50 [.925]  | 36.83 [1.450] | 2-66473-8   |
| 5             | 5             | SPECIAL    | 36.83 [1.450] | 50.17 [1.975] | 2-66473-7   |
|               | 5             | 2          | 23.27 [.916]  | 36.60 [1.441] | 2-66473-4   |
|               | 4             | SPECIAL    | 21.59 [.850]  | 34.93 [1.375] | 2-66473-3   |
|               | 4             | SPECIAL    | 14.86 [.585]  | 28.19 [1.110] | 2-66473-2   |
|               | 5             | SPECIAL    | 13.72 [.540]  | 27.05 [1.065] | 2-66473-1   |
|               | 4             | 3          | 29.74 [1.171] | 43.08 [1.696] | 2-66473-0   |
|               | 4             | 1          | 17.81 [.701]  | 31.14 [1.226] | 1-66473-9   |
|               | 5             | 3          | 29.74 [1.171] | 43.08 [1.696] | 1-66473-8   |
|               | 5             | 1          | 17.81 [.701]  | 31.14 [1.226] | 1-66473-7   |
|               | 4             | 2          | 23.27 [.916]  | 36.60 [1.441] | 1-66473-6   |
| 3             | 4             | SPECIAL    | 14.86 [.585]  | 28.19 [1.110] | 1-66473-5   |
|               | 2             | SPECIAL    | 13.72 [.540]  | 27.05 [1.065] | 1-66473-4   |
|               | 4             | 2          | 23.27 [.916]  | 36.60 [1.441] | 1-66473-1   |
|               | 4             | 1          | 17.81 [.701]  | 31.14 [1.226] | 1-66473-0   |
|               | 4             | 3          | 29.74 [1.171] | 43.08 [1.696] | 66473-9     |
|               | 4             | 1          | 17.81 [.701]  | 31.14 [1.226] | 66473-7     |
|               | 2             | 3          | 29.74 [1.171] | 43.08 [1.696] | 66473-3     |
|               | 2             | 1          | 17.81 [.701]  | 31.14 [1.226] | 66473-1     |
| FINISH (POST) | FINISH (BODY) | NO OF TERM | A             | B             | PART NUMBER |

|                                        |                                                                                                                                 |                                |                                                                                      |                    |                       |
|----------------------------------------|---------------------------------------------------------------------------------------------------------------------------------|--------------------------------|--------------------------------------------------------------------------------------|--------------------|-----------------------|
| THIS DRAWING IS A CONTROLLED DOCUMENT. |                                                                                                                                 | DWN<br>D. HARDY<br>05/02/94    | TE Connectivity                                                                      |                    |                       |
| DIMENSIONS:<br>mm [INCHES]             |                                                                                                                                 | CHK<br>W.G. LENKER<br>05/17/94 |                                                                                      |                    |                       |
|                                        | TOLERANCES UNLESS OTHERWISE SPECIFIED:<br>0 PLC ± -<br>1 PLC ± -<br>2 PLC ± -<br>3 PLC ± 0.13 [.005]<br>4 PLC ± -<br>ANGLES ± - | APVD<br>-                      | NAME                                                                                 |                    |                       |
|                                        |                                                                                                                                 | PRODUCT SPEC<br>-              | SOCKET CONTACT, CRIMPED<br>1.57 [.062] DIA, 1.14 [.045] x<br>1.14 [.045] POST (W.W.) |                    |                       |
|                                        |                                                                                                                                 | APPLICATION SPEC<br>-          |                                                                                      |                    |                       |
| MATERIAL<br>BRASS PER ASTM B-36        | FINISH<br>-                                                                                                                     | WEIGHT<br>-                    | SIZE<br>A2                                                                           | CAGE CODE<br>00779 | DRAWING NO<br>C-66473 |
| CUSTOMER DRAWING                       |                                                                                                                                 |                                | SCALE<br>8:1                                                                         | SHEET<br>1 OF 1    | REV<br>AB             |