
THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -,- .
© COPYRIGHT – TE Connectivity ALL RIGHTS RESERVED.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	E1	REV PER ECR 07–014387	19JUN07	JR	TM
	F	REVISED PER ECO–17–001534	08MAY2017	RS	DR

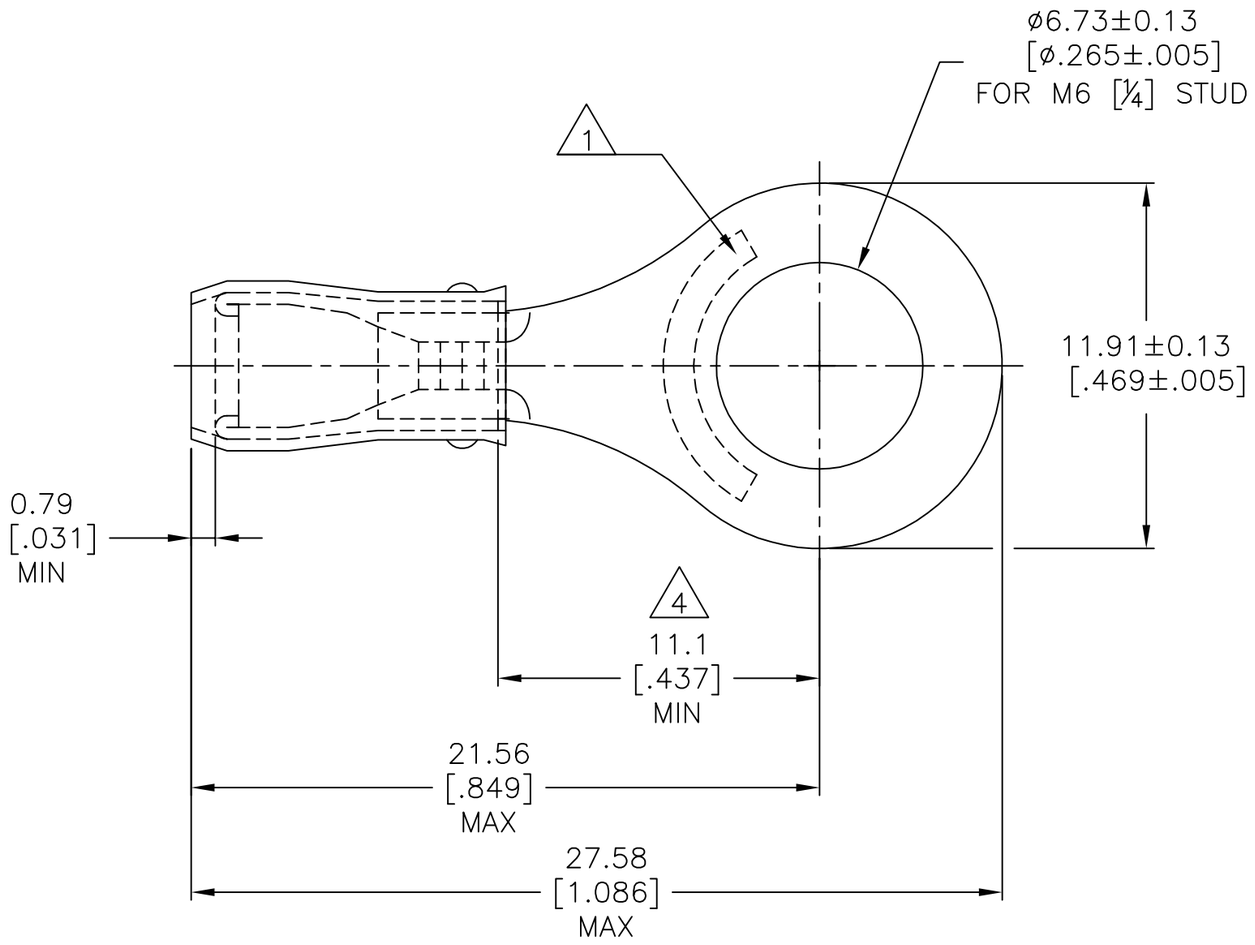

1. STAMP AMP 18–16, APPROX AS SHOWN.
2. WIRE INSULATION DIA IS ø1.4–2.8mm [ø.055–.110].
3. TONGUE MATERIAL THICKNESS IS 0.79±0.05 [.031±.002].
4. APPLIES FROM EDGE OF WIRE BARREL TO CENTER OF STUD HOLE.
5. MATERIAL: BODY – COPPER PER ASTM B–152
 SLEEVE – NYLON.
6. FINISH: BODY – TIN PLATE PER ASTM B–545
 SLEEVE – COLOR, ORANGE.

1000	LOOSE PIECE	152879
QTY	PACKAGE TYPE	PART NO.

AMP INCORPORATED
CUSTOMER SERVICE SYSTEMS

FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1–800–522–6752
FOR APPLICATION TOOLING INFORMATION	TOOLING ASSISTANCE CENTER 1–800–722–1111
FOR ORDER ENTRY	1–800–526–5142

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.

MAX RECOMMENDED OPERATING TEMPERATURE: 105°C [221°F]

VOLTAGE RATING: 300 V MAX

CIRCULAR MIL AREA: 0.81–1.65mm² [1600–3260] SOLID OR STRANDED

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	± –
1 PLC	± –
2 PLC	± 0.20 [.008]
3 PLC	± –
4 PLC	± –
ANGLES	± –

MATERIAL 5

FINISH 6

DWN	JR RUTH 19JUN2007
CHK	T MICHIELUTTI 19JUN07
APVD	T MICHIELUTTI 19JUN07
PRODUCT SPEC	–
APPLICATION SPEC	–
WEIGHT	–

TE Connectivity

NAME: TERMINAL, RING TONGUE, PIDG, WIRE SIZE: 18–16 AWG

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C–152879	–

CUSTOMER DRAWING | SCALE 5:1 | SHEET 1 OF 1 | REV F

1470–19 (1/15)