THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
© COPYRIGHT — BY — ALL RIGHTS RESERVED

LOC	DIST
FB	00

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	A2	REVISED PER ECR-16-012124	07DEC16	T.Q	W.H

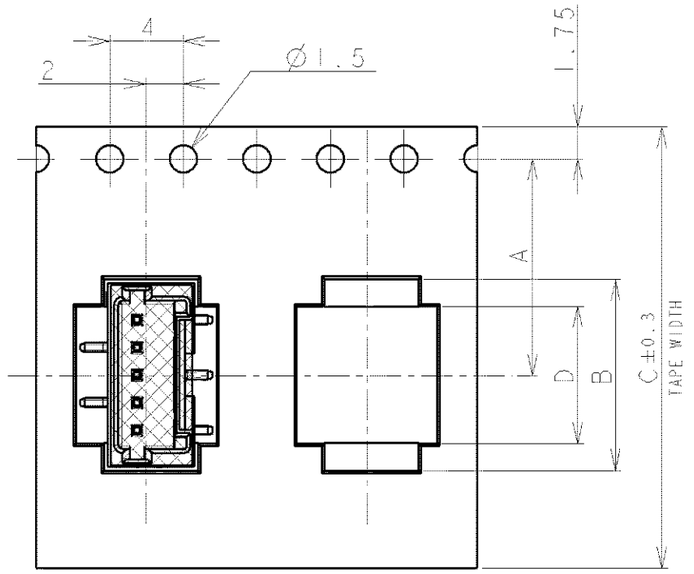

TYPE 1

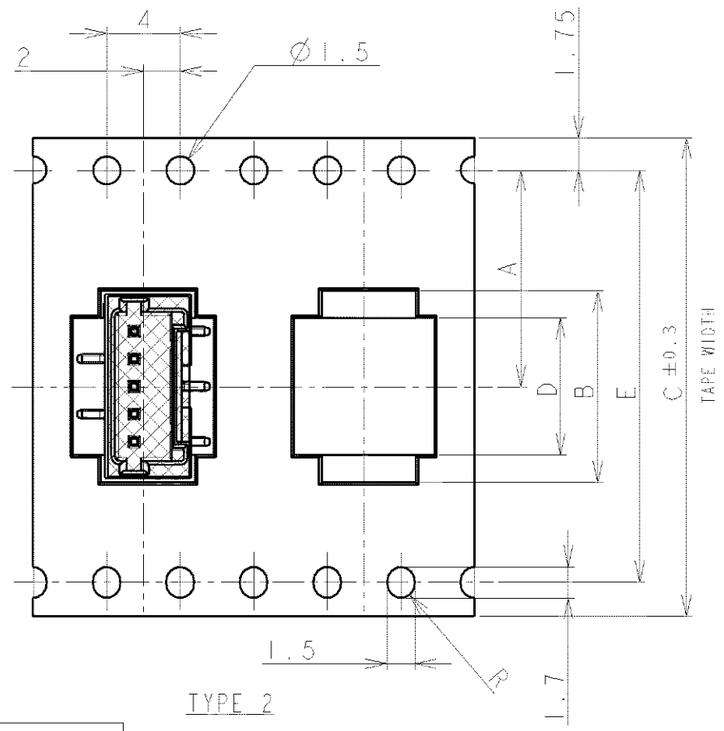

TYPE 2

NOTE:
1. PEELING STRENGTH: 0.20-0.69N (20-70gf)
PEELING ANGLE: 165-180°
PEELING SPEED: 300mm/MINUTE.

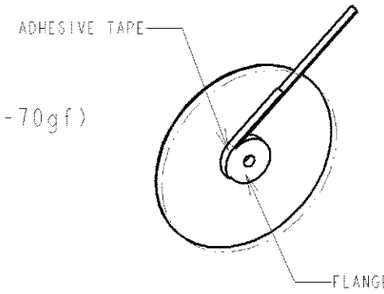

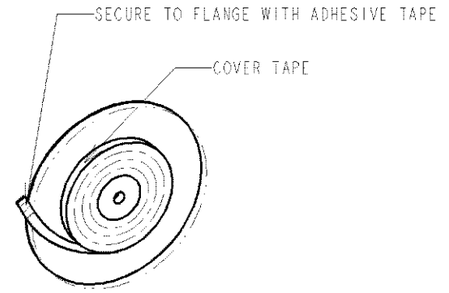



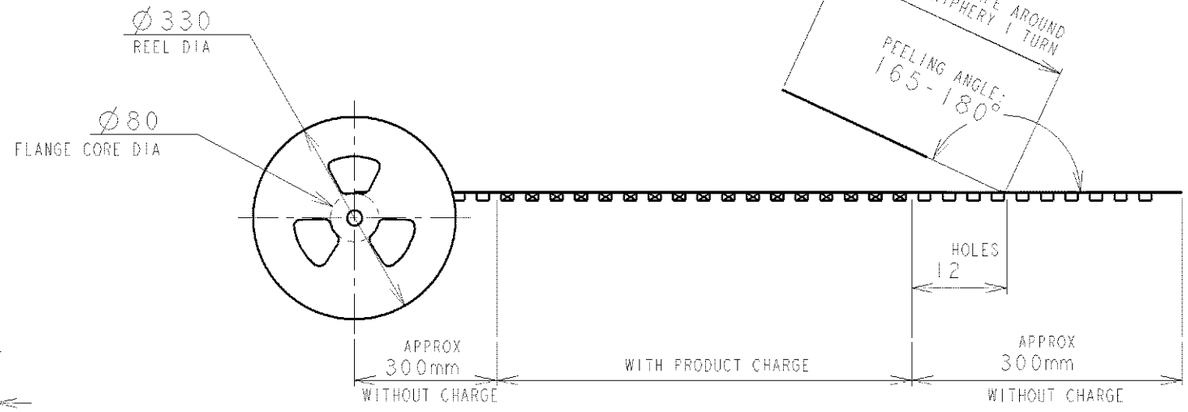

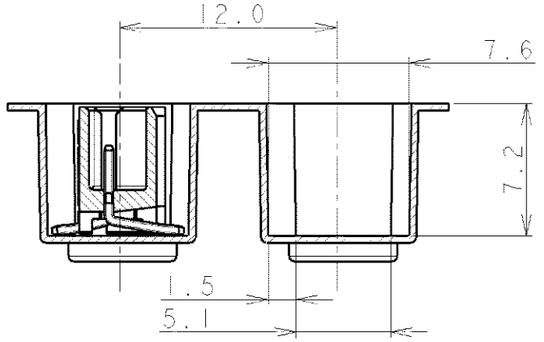

OFF TOP OF REEL →

TOLERANCES UNLESS OTHERWISE SPECIFIED:

10≥	±0.2
30≥ * >10	±0.25
100≥ * >30	±0.3
ANGLE	±3°

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	±
1 PLC	±
2 PLC	±
3 PLC	±
4 PLC	±
ANGLES	±

MATERIAL -
FINISH -

DWN	S.XU	31JAN03
CHK	S.YAO	31JAN03
APVD	T.SASAKI	31JAN03
PRODUCT SPEC	108-60018	
APPLICATION SPEC	114-5223	
WEIGHT		

TE Connectivity

NAME
AMP Mini Common Terminated (CT) Connector 1.5mm PITCH
SINGLE ROW POST HDR ASS'Y (V) SMT TYPE
WITH BOSS, POLYIMIDE TAPE, EMBOSS TAPE PACKAGED

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-292232	-

CUSTOMER DRAWING | SCALE NON | SHEET 1 OF 4 | REV A2

LOC	DIST
FB	00

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
		SEE SHEET 1			

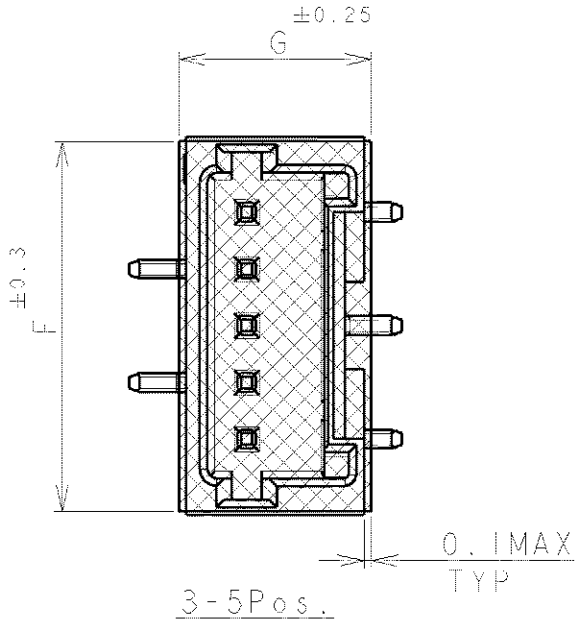

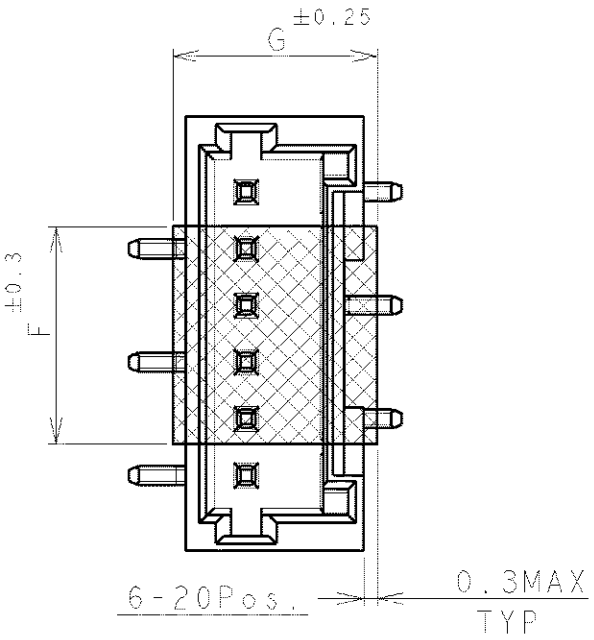

	TAPE TYPE	DIMENSIONS W2	W1	G	F	E	D	C	B	A	QTY/ REEL	POS	COLOR	ON TAPE P/N
TYPE 2		49.5	45.5	5.0	9.5	40.4	29.9	44	32.9	20.2±0.15	500	20	BEIGE	2-292232-0
		49.5	45.5	5.0	9.5	40.4	28.4	44	31.4		500	19		1-292232-9
		49.5	45.5	5.0	9.5	40.4	26.9	44	29.9		500	18		1-292232-8
		49.5	45.5	5.0	9.5	40.4	25.4	44	28.4		500	17		1 292232-7
		49.5	45.5	5.0	9.5	40.4	23.9	44	26.9		500	16		1-292232-6
		49.5	45.5	5.0	9.5	40.4	22.4	44	25.4		500	15		1-292232-5
		49.5	45.5	5.0	9.5	40.4	20.9	44	23.9		500	14		1-292232-4
		49.5	45.5	5.0	9.5	40.4	19.4	44	22.4		500	13		1 292232-3
		37.5	33.5	5.0	9.5	28.4	17.9	32	20.9	14.2	500	12		1-292232-2
		37.5	33.5	5.0	9.5	28.4	16.4	32	19.4	14.2	500	11		1-292232-1
		37.5	33.5	5.0	9.5	28.4	14.9	32	17.9	14.2	500	10		1 292232-0
		37.5	33.5	5.0	6.5	28.4	13.4	32	16.4	14.2	500	9		292232-9
TYPE 1		29.5	25.5	5.0	6.5	-	11.9	24	14.9	11.5	500	8		292232-8
		29.5	25.5	5.0	6.5	-	10.4	24	13.4	11.5	500	7		292232-7
		29.5	25.5	5.0	6.5		8.9	24	11.9	11.5	500	6		292232-6
		29.5	25.5	5.0	9.5	-	7.4	24	10.4	11.5	500	5		292232 5
		21.5	17.5	5.0	8.0	-	5.9	16	8.9	7.5	500	4		292232-4
		21.5	17.5	5.0	6.5	-	4.4	16	7.4	7.5	500	3		292232-3

THIS DRAWING IS UNPUBLISHED. © COPYRIGHT — BY —
ALL RIGHTS RESERVED.
RELEASED FOR PUBLICATION

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±
1 PLC ±±
2 PLC ±±
3 PLC ±±
4 PLC ±±
ANGLES ±-

DWN
CHK
APVD
PRODUCT SPEC: SEE SHEET 1
APPLICATION SPEC: SEE SHEET 1
WEIGHT
CUSTOMER DRAWING

MATERIAL
FINISH

TE Connectivity

NAME AMP Mini Common Terminated (CT) Connector 1.5mm PITCH
SINGLE ROW POST HDR ASS'Y (V) SMT TYPE
WITH POLYIMIDE TAPE, WITH BOSS, EMBOSS TAPE PACKAGED

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A4	00779	C-292232	-

SCALE	SHEET	REV
NON	2 OF 4	A2

THIS DRAWING IS UNPUBLISHED | RELEASED FOR PUBLICATION
© COPYRIGHT — BY — ALL RIGHTS RESERVED.

LOC	DIST
FB	00

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
		SEE SHEET 1			

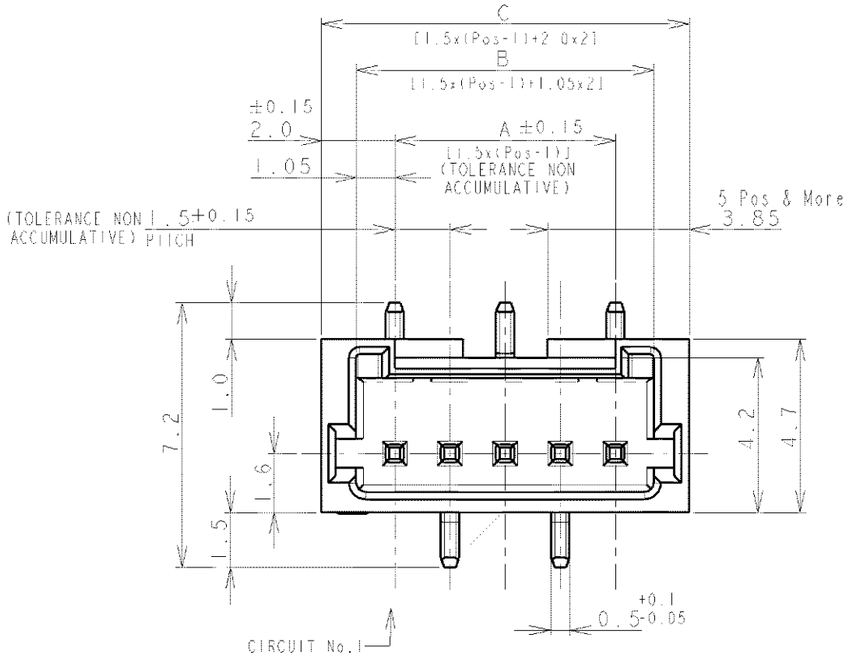

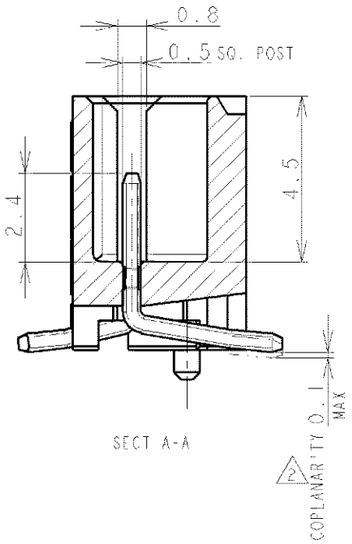

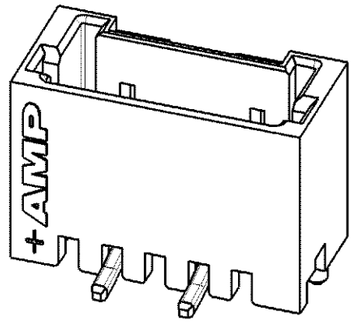

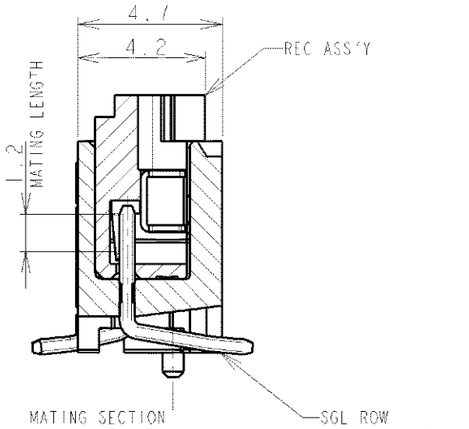

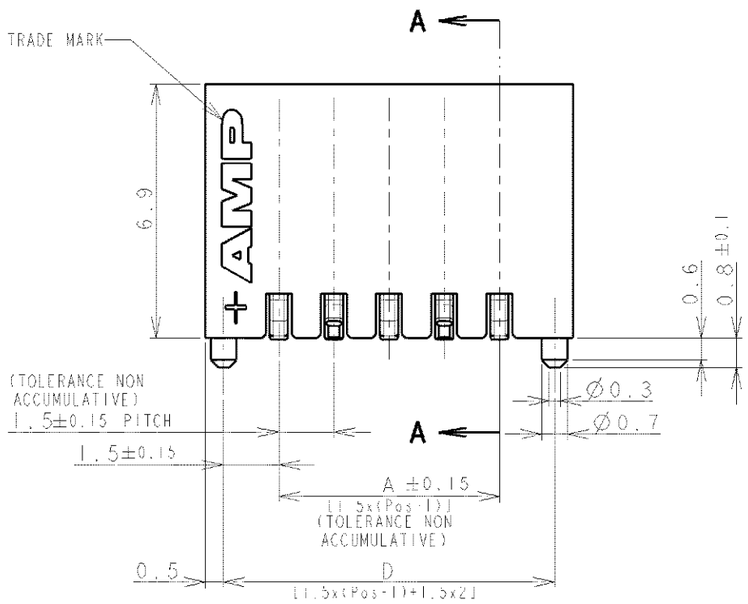

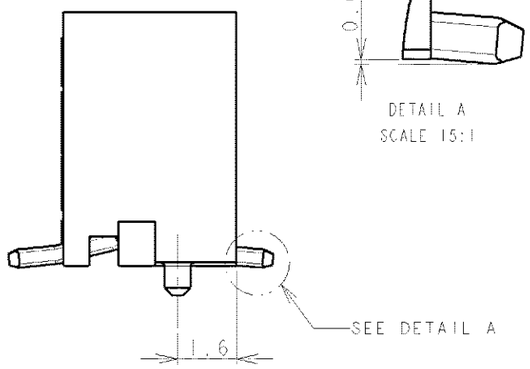

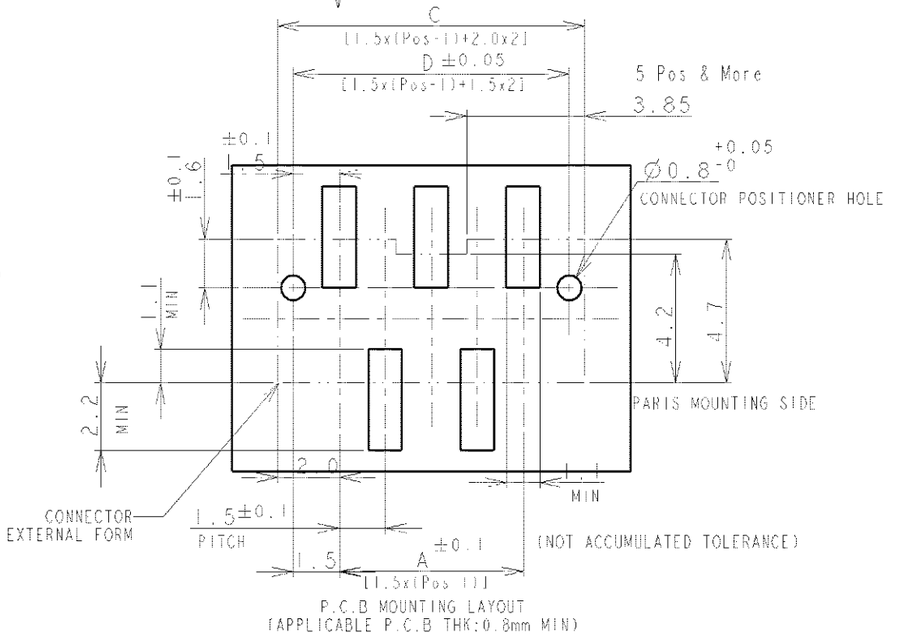

SHOWN AS WIHTOUT TAPE

NOTES:
1. MATERIAL:
   HOUSING: GLASS FILLED, HIGH HEAT RESISTANT NYLON, UL94V-0, COLOR: BEIGE OR BLACK
   POST:Sn-100% BRASS WIRE
2. TO BE MEASURED WITH CONNECTOR PLACED ON HORIZONTAL DATUM SURFACE, FLOAT OF SOLDER TINE FROM DATUM SURFACE IS 0.1mm MAX.

DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ±	DWN	TE Connectivity
		CHK	
		APVD	NAME: AMP MINI COMMON TERMINATION (CT) CONNECTOR 1.5 mm PITCH SINGLE ROW POST HDR ASS'Y (V) SMT TYPE WITH BOSS
		PRODUCT SPEC	
		APPLICATION SPEC	SIZE: A3 / CAGE CODE: 00779 / DRAWING NO: C-292232 / RESTRICTED TO
MATERIAL: SEE NOTE 1	FINISH: SEE NOTE 1	WEIGHT	CUSTOMER DRAWING / SCALE: NON / SHEET 3 OF 4 / REV A2

LOC	DIST
FB	00

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
		SEE SHEET 1	-	-	-

WEIGHT (g)	D	C	B	A	Pos.	BEIGE (NAT)
	DIMENSIONS					P/N
0.98	31.5	32.5	30.6	28.5	20	2-292232-0
0.93	30.0	31.0	29.1	27.0	19	1-292232-9
0.89	28.5	29.5	27.6	25.5	18	1-292232-8
0.84	27.0	28.0	26.1	24.0	17	1-292232-7
0.80	25.5	26.5	24.6	22.5	16	1-292232-6
0.75	24.0	25.0	23.1	21.0	15	1-292232-5
0.71	22.5	23.5	21.6	19.5	14	1-292232-4
0.66	21.0	22.0	20.1	18.0	13	1-292232-3
0.62	19.5	20.5	18.6	16.5	12	1-292232-2
0.57	18.0	19.0	17.1	15.0	11	1-292232-1
0.52	16.5	17.5	15.6	13.5	10	1-292232-0
0.48	15.0	16.0	14.1	12.0	9	292232-9
0.43	13.5	14.5	12.6	10.5	8	292232-8
0.39	12.0	13.0	11.1	9.0	7	292232-7
0.34	10.5	11.5	9.6	7.5	6	292232-6
0.30	9.0	10.0	8.1	6.0	5	292232-5
0.25	7.5	8.5	6.6	4.5	4	292232-4
0.20	6.0	7.0	5.1	3.0	3	292232-3

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
© COPYRIGHT 1 BY 1 ALL RIGHTS RESERVED.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	±
1 PLC	±
2 PLC	±
3 PLC	±
4 PLC	±
ANGLES	±

DWN

CHK

APVD

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

MATERIAL SEE SHEET 1

FINISH SEE SHEET 1

TE Connectivity

NAME AMP MINI COMMON TERMINATED (CT) CONNECTOR 1.5 mm PITCH SINGLE ROW POST HDR ASS'Y (V) SMT TYPE WITH BOSS

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A4	00779	C-292232	

CUSTOMER DRAWING

SCALE NON SHEET 4 OF 4 REV A2