

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

© COPYRIGHT — By Tyco Electronics Japan G.K.




ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	D	REVISED	ECR-11-008701	26APR11	TS KB

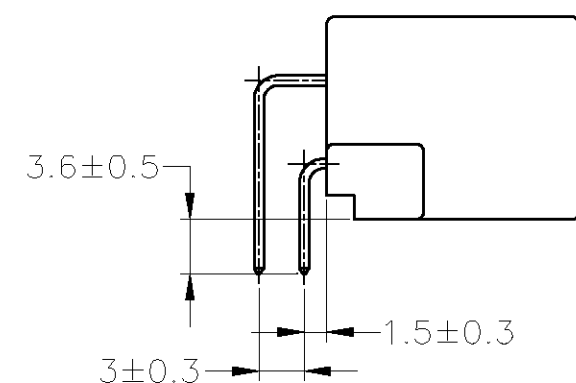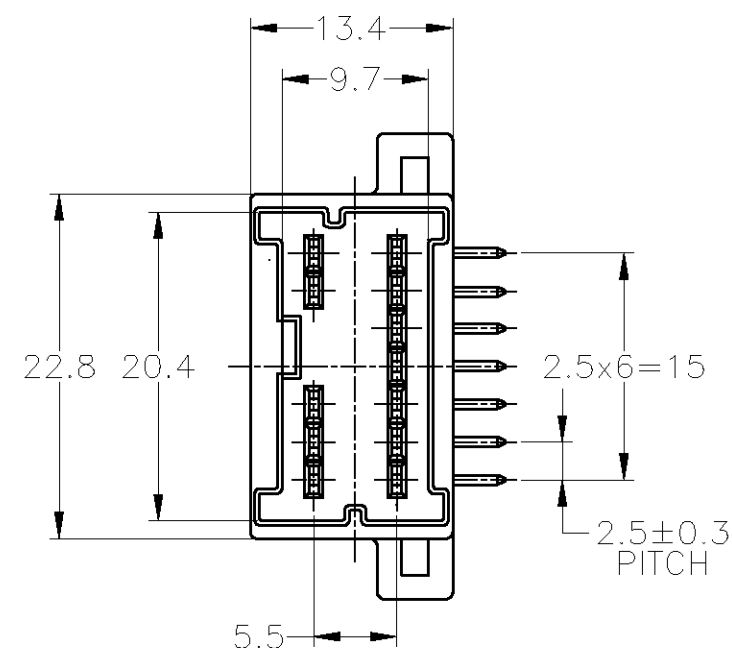
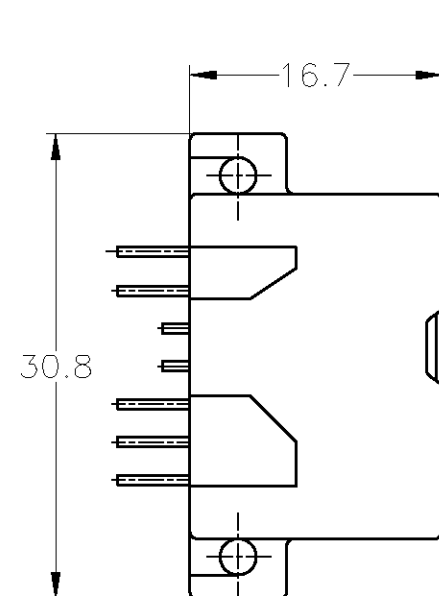


1. RECOMMENDED MOUNTING SCREW :
PAN-HEADED, TYPE 2 TAPPING SCREW OF
3DIA × 6LENGTH (JIS B1115, B1122) ,
TIGHTENING TORQUE : 0.39N・m MAX.

2. CIRCUIT NUMBER

1. 推奨取付ネジ : JIS B1115, B1112
タッピングネジ, なべ2種, 呼び径3, 長さ6,
締め付けトルク : 0.39N・m 以下

2. 回路番号

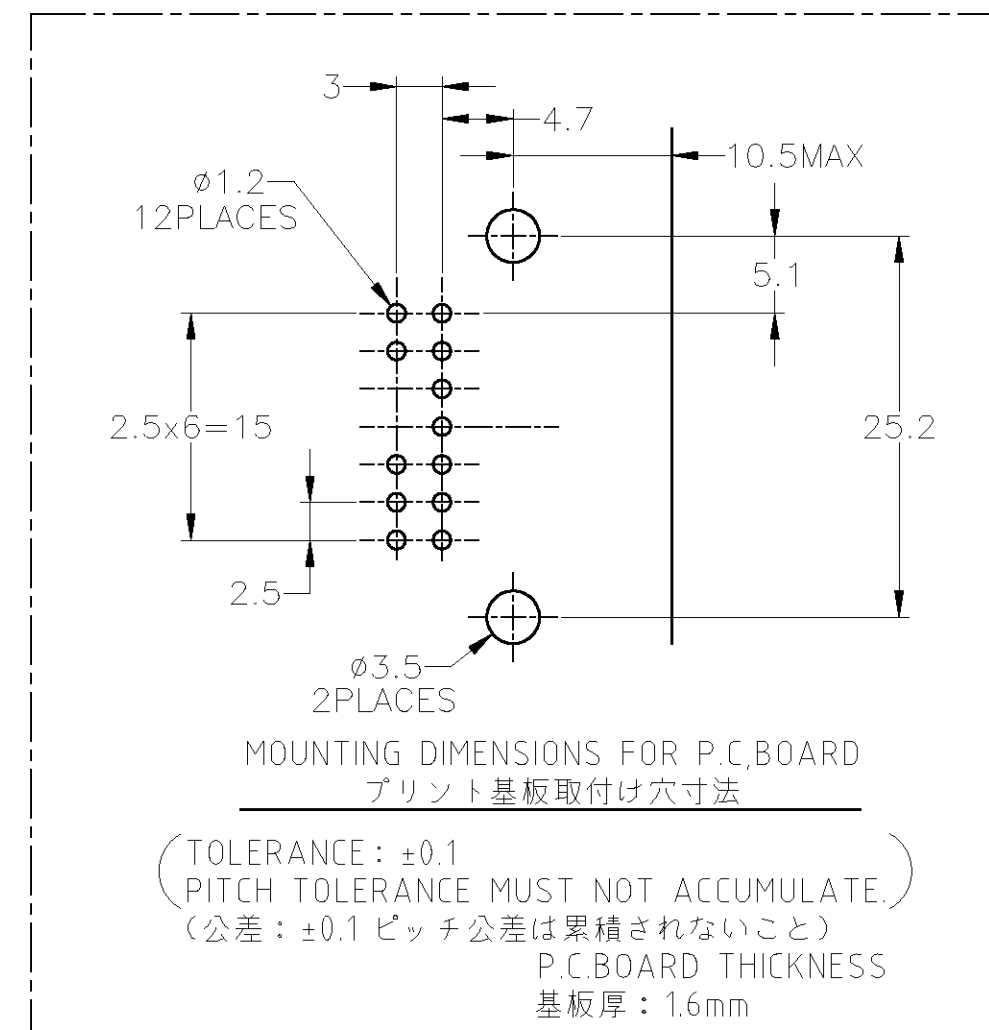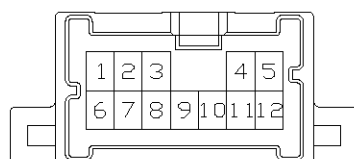

MOUNTING DIMENSIONS FOR P.C. BOARD
プリント基板取付け穴寸法

(TOLERANCE : ±0.1
PITCH TOLERANCE MUST NOT ACCUMULATE.)
(公差 : ±0.1 ピッチ公差は累積されないこと)
P.C. BOARD THICKNESS
基板厚 : 1.6mm

OBSOLETE	錫めっき (10) / 金めっき (2) PRE-TINED (10) / GOLD (2)	7, 9 $\triangle$ 2	自然色 NATURAL	3-1123413-1
OBSOLETE	錫めっき (10) / 金めっき (2) PRE-TINED (10) / GOLD (2)	7, 9 $\triangle$ 2	自然色 NATURAL	2-1123413-1
	錫めっき (12) PRE-TINED (12)	-	自然色 NATURAL	1123413-1
	タブ仕上 (本数) FINISH OF CONTACT	金めっき端子使用回路番号 CIRCUIT NO. OF GOLD PLATED CONTACT	色 COLOR	型番 PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:
mm	
	0 PLC ± -
	1 PLC ± -
	2 PLC ± -
	3 PLC ± -
	4 PLC ± -
	ANGLES ± -
MATERIAL	FINISH
PBT	-

一般公差 (GENERAL TOLERANCE)
10 ± : ±0.2
30 ± > 10 : ±0.25
100 ± > 30 : ±0.3
ANGLE : ±3°

DWN T.MINEMATSU 08APR98				
CHK E.SASAKI 08APR98				
APVD M.TSUKAKOSHI 08APR98	NAME			
PRODUCT SPEC 108-5603	040III MULTILOCK CONNECTOR 12POSITION CAP HOUSING ASSEMBLY WIRE TO BOARD (H) TYPE			
APPLICATION SPEC -	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
WEIGHT 3.9 g	A3	00779	C-1123413	-
CUSTOMER DRAWING		SCALE 2:1	SHEET 1 OF 1	REV D