
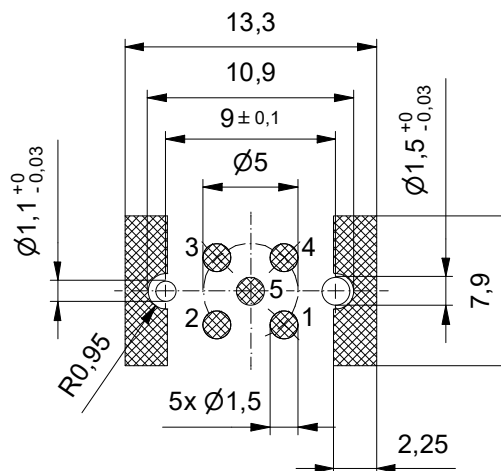


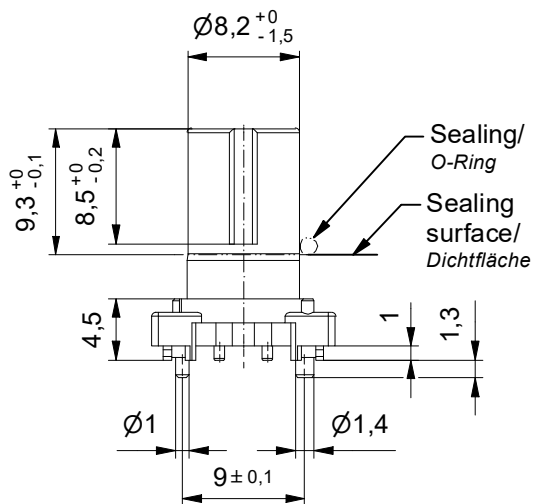




Tape & Reel - parts with
adhesive pad Ø11 mm/
Tape & Reel - Artikel mit Klebepad Ø11 mm

Technical specification/

Technische Daten:

Rated Voltage/ Bemessungsspannung: IEC 61076-2-101	4pos/pol. 250 V AC / DC 5pos/pol. 60 V AC / DC
Current rating/ Strombelastbarkeit: IEC 61076-2-101	4 A / 40 °C
Insulation resistance/ Isolationswiderstand: IEC 60512	>= 100 MΩ
Pollution degree/ Verschmutzungsgrad: IEC 60664-1	3/2
Degree of protection/ Schutzart: IEC 60529	IP67, mated condition/ im gesteckten Zustand
Temperature range/ Umgebungstemperatur:	-25 °C ... +95 °C
Mating cycles/ Steckzyklen: IEC 60512-9a	>= 100

Materials/

Werkstoffe:


Contact/ Kontakt:	CuZn, Ni b / Au 0,2 gal.
Contact carrier/ Kontaktträger:	LCP GF, UL 94 V-0
Soldering sheet/ Lötblech:	CuZn, Ni / Sn
Suitable for reflow soldering max. 60 s / 250 °C/ Geeignet für Reflow Lötprozeß max. 60 s / 250 °C	
Coplanarity of all contacts and soldering sheets max. 0,1 mm/ Koplanarität aller Kontakte und Lötbleche max. 0,1 mm	

Part no packing unit tape & reel/ Art.-Nr. Verpackungseinheit Rolle:	Part no packing unit in bulk/ Art.-Nr. Verpackungseinheit lose:	Description/ Bezeichnung:	Pos/ Pol:
43-01848TR	43-01848	SAL - 12 - IK4 / SMT	4
43-01849TR	43-01849	SAL - 12 - IK5 / SMT	5

general tolerance/
Allgemeintoleranz:

0	± 0,50 mm
0,0	± 0,25 mm
0,00	± 0,10 mm
*	± 1,5°

scale/Maßstab:



dim. in mm

	Date/Datum	Name
drawn/ gez.	12.10.2011	Kiesburgs
appd./ gepr.	13.10.2011	W. Schmidt

Insulation Body female M12x1,
SMT Socket
Isolierkörper Kupplung M12x1,
SMT Flansch

Index: f Ä23-1132 21.01.2026 ABU

Amphenol
— CONEC

dwg no /
Z.-nr.:

43K1A1478

see table/ siehe Tabelle

DIN-
A4

1 / 1