

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

- , - .

©

COPYRIGHT

-

BY TYCO ELECTRONICS CORPORATION.

ALL INTERNATIONAL RIGHTS RESERVED.

LOC

DIST

REVISIONS

AF

50

P

LTR

DESCRIPTION

DATE

DWN

APVD

C1

REVISED PER ECR-09-002564

12FEB09

HMR

KR

D

ECR-13-008483

06AUG13

XJ

DZ

IDENTIFICATION NUMBER
FOR MAGNET WIRE RANGE

43

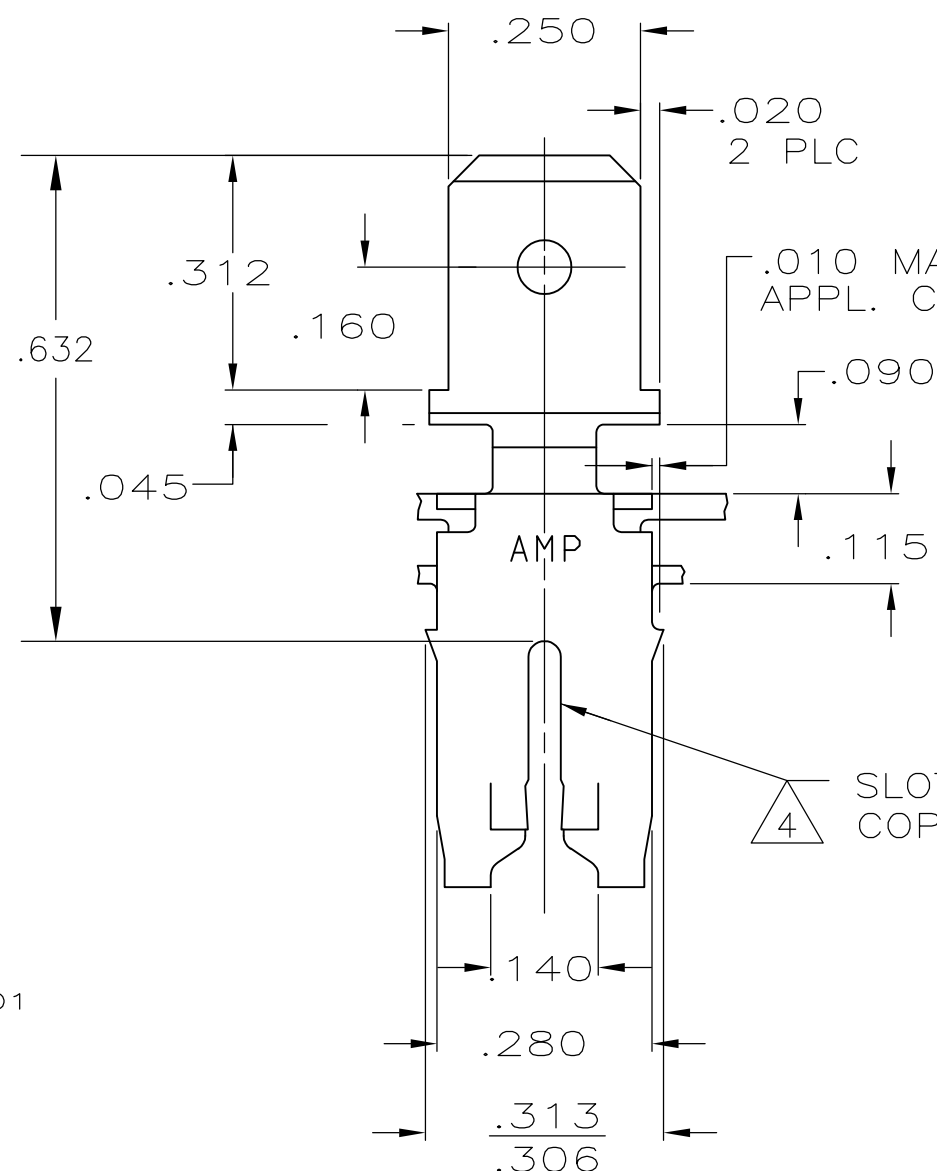
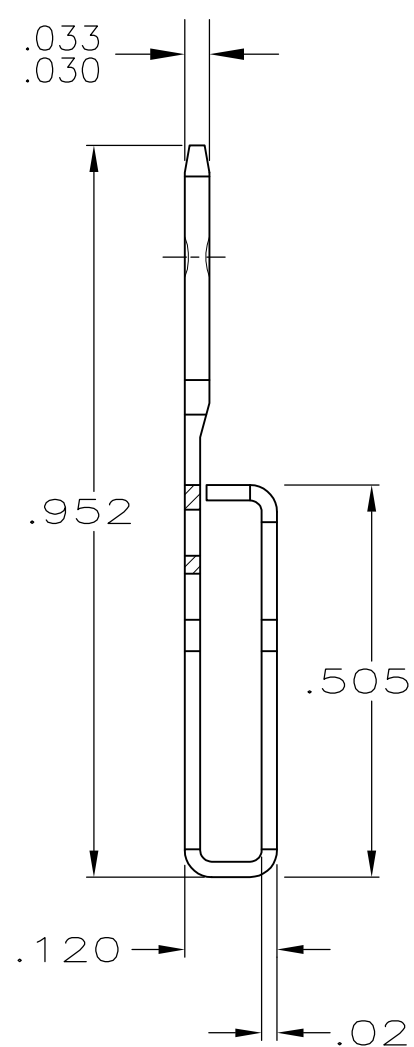


MAG-MATE CAVITY SPECIFICATION

2

CONTINUOUS STRIP ON REELS WITH TERMINALS
LOCATED ON .330 CENTERS.

3

AFTER INSERTION INTO PLASTIC HOLDER, TAB
PORTION MUST BE BENT OVER 45° TO 90° OR
POTTED-IN TO PREVENT PULL-OUT WHEN MATING
RECEPTACLE IS DISCONNECTED.TWO #14-13.5 COPPER MAGNET WIRES ACCEPTABLE
AT CAVITY ANVIL HEIGHT OF .155-.165..010 MAX
APPL. CUT-OFFSLOT ACCEPTS #13-#14
COPPER MAGNET WIRE

63465-1

PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN M.S. FEHER 4/21/87

CHK G YETTER 4/21/87


APVD J SWARTZ 4/21/87

PRODUCT SPEC

APPLICATION SPEC

WEIGHT 114-2066

CUSTOMER DRAWING

DIMENSIONS:
INCHESTOLERANCES UNLESS
OTHERWISE SPECIFIED:0 PLC ± -
1 PLC ± -
2 PLC ± -
3 PLC ± .015
4 PLC ± -
ANGLES ± -

MATERIAL

#4H PRE-MILLED BRASS

FINISH

TIN PLATE

Tyco Electronics Corporation
Harrisburg, PA 17105-3608

NAME

TAB, .250 FASTON,™
MAG-MATE™

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A3

00779

C-63465

SCALE 4:1

SHEET

1 OF 1

REV

D