


PNEUMATIC

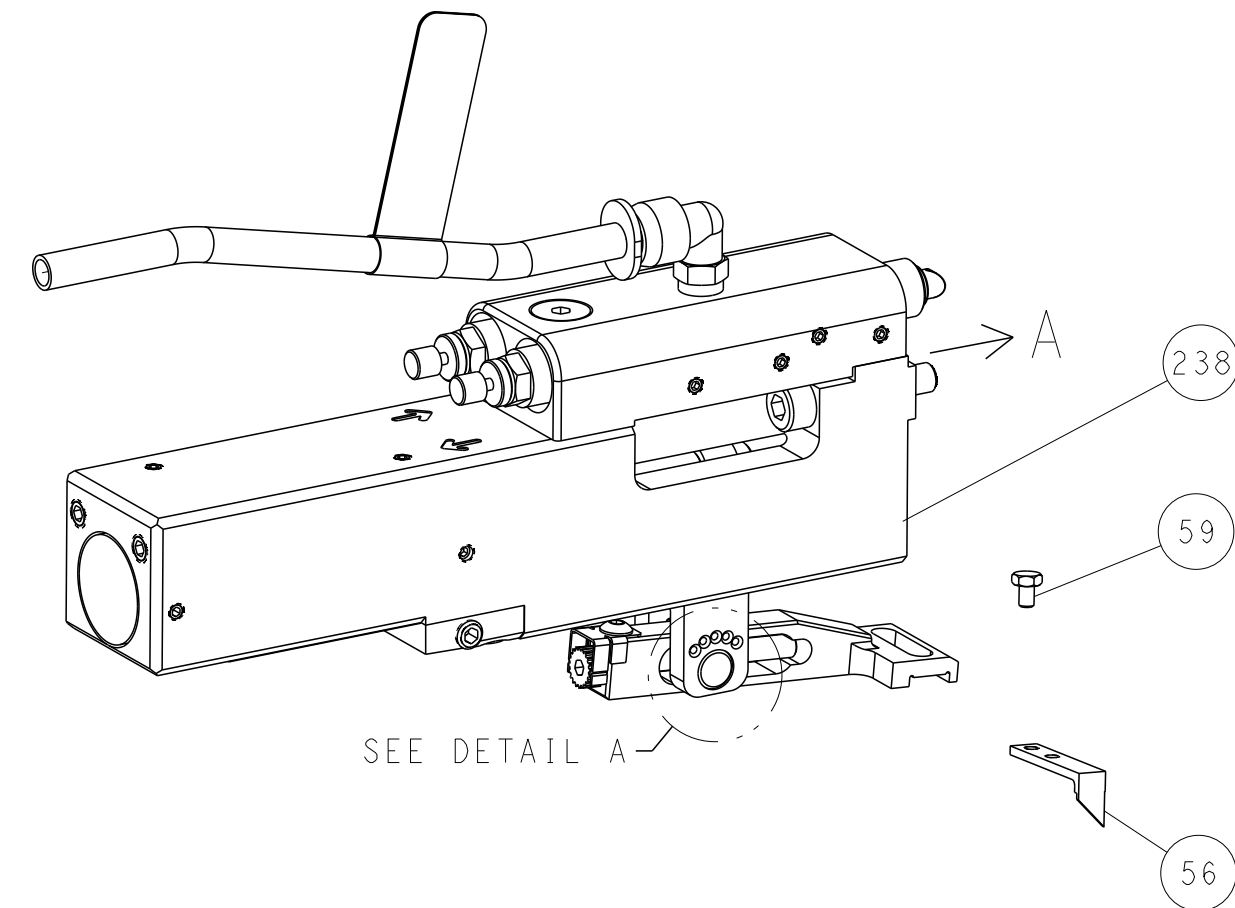

30mm STROKE

40mm STROKE

MECHANICAL POST FEED

30mm STROKE

40mm STROKE

MECHANICAL PRE FEED

30mm STROKE

40mm STROKE

AIR FEED

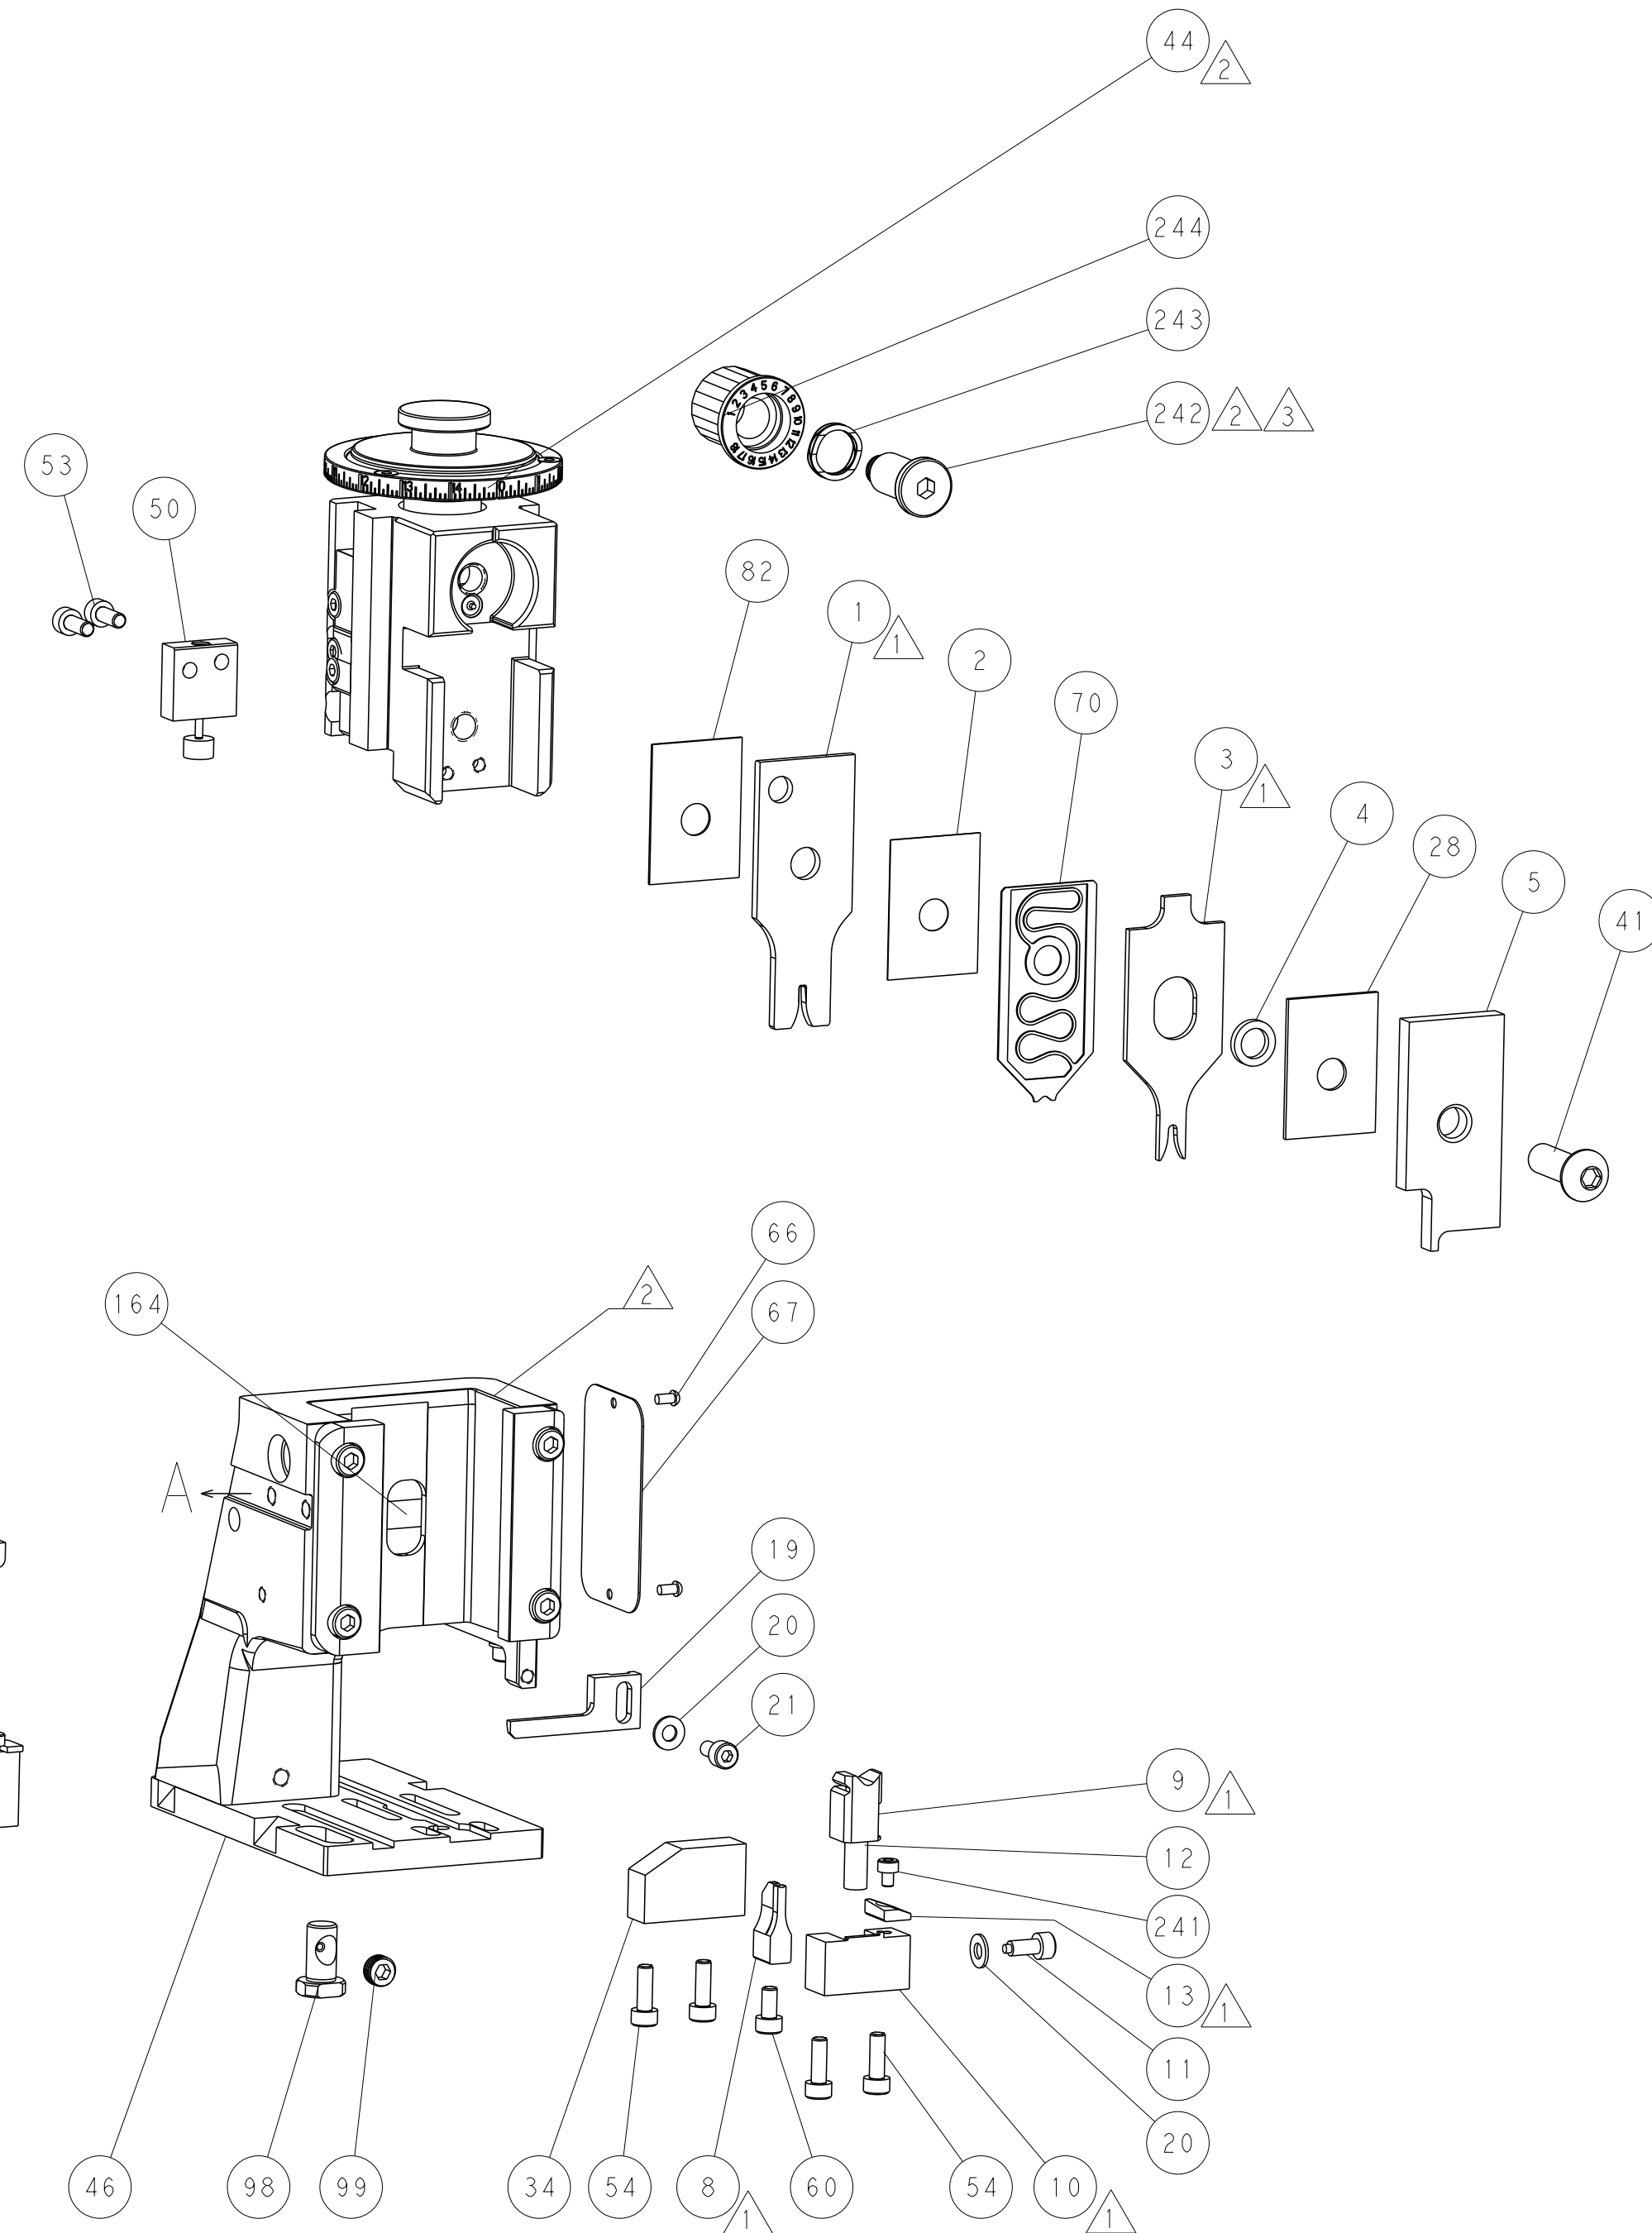



Diagram showing the front view of the device. Callout 29 points to the front panel, and callout 30 points to the top cover.

FEED TRACK POSITION GUIDE BY INSULATION BARREL

THIS DRAWING IS A CONTROLLED DOCUMENT FOR ETCO-ESTERLINE'S CORPORATION IT IS SUBJECT TO ETCO-ESTERLINE'S PROPRIETARY RIGHTS AND NO REPRODUCTION OR USE OF ANY INFORMATION HEREON IS PERMITTED WITHOUT THE ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.		DWN C CHEN CHK X1 APVD 1 CRUZ	15JAN2013 15JAN2013 15JAN2013	 TE Connectivity Harrisburg, PA 17105-3608		
DIMENSIONS: mm 		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±. 1 PLC ±. 2 PLC ±. 3 PLC ±. 4 PLC ±. ANGLES ±. MATERIAL - FINISH -		NAME Ocean Side Feed Applicator -		
		SIZE A1	CASE CODE 00779	DRAWING NO C=2151854	RESTRICTED TO -	
Customer Accessible Production Drawing				SCALE 1:2	SHEET 2 OF 4	REV C