

4




3

2

1

used for:

D-SUB

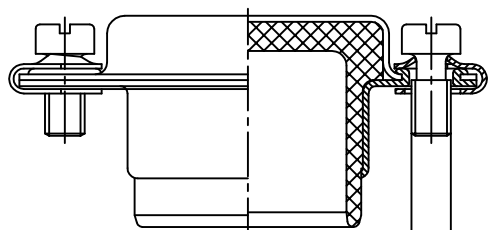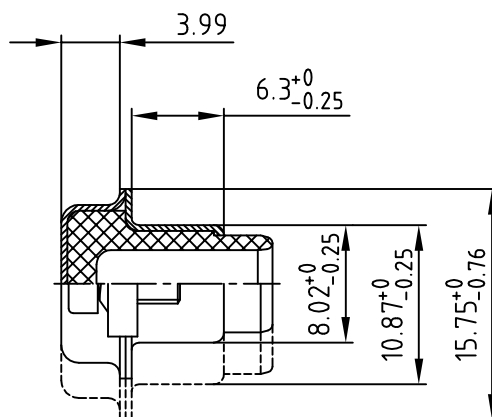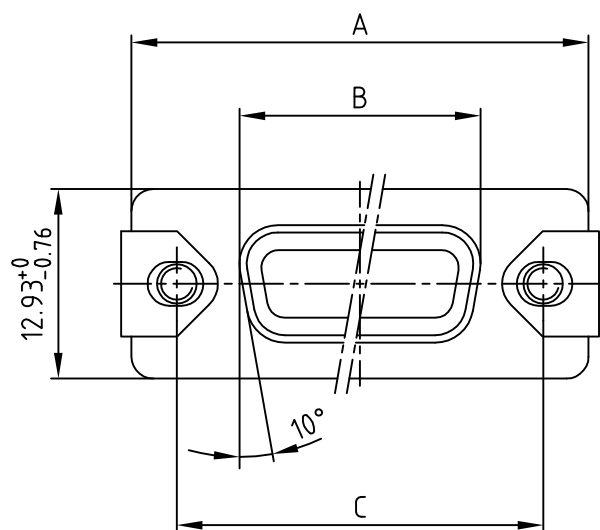

4-40 UNC


NOTES:


- Ⓒ 1. METALSHELLS: COPPER ALLOY;
min. 315µin TIN over 40-80µin Nickel
2. INSULATORS: TPE
- Ⓒ 3. CLAMPS: STAINLESS STEEL
- Ⓒ 4. SCREWS: STAINLESS STEEL

Directive 2002/95/EC RoHS compliant

Shellsize	A -0.76	B -0.25	C	Part No: Bulk package	Part No: Ⓒ Single package
1	31.19	16.46	25.00 $^{+0.12}_{-0.13}$	165X14769X	165X14769XE
2	39.52	24.79	33.30 $^{+0.15}_{-0.1}$	165X14779X	165X14779XE
3	53.42	38.50	47.04 ± 0.13	165X14789X	165X14789XE
4	69.70	54.96	63.50 ± 0.13	165X14799X	165X14799XE
5	67.31	52.55	61.10 $^{+0.14}_{-0.11}$	165X14809X	165X14809XE

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH
DO NOT ALTER CAD DRAWING BY HAND

				tolerance		
				2001	date	name
				drawn	10.09.	E. Mickenbecker
				appd.	10.09.	A. Mickenbecker
				norm	DIN 41652	
3 x c	Ä4329	11.06.2012	K.H.	d-old		
1 x b	Ä4033	30.06.2011	K.H.			
a	Original					
rev.	description	date	name			



scale: 2:1
material: SEE NOTES

title:
HOOD 9-50pos.
for plug connector
water resistant, shielded for EMI/RFI

dwg no: AutoCAD 2000 DIN-A
16K1A290A 4
sh: 1/1

part no: SEE TABLE

4

3

2

1