
© 2021 TE Connectivity. All Rights Reserved.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	ECN-21-107697	30JUN2021	PZ	WKH

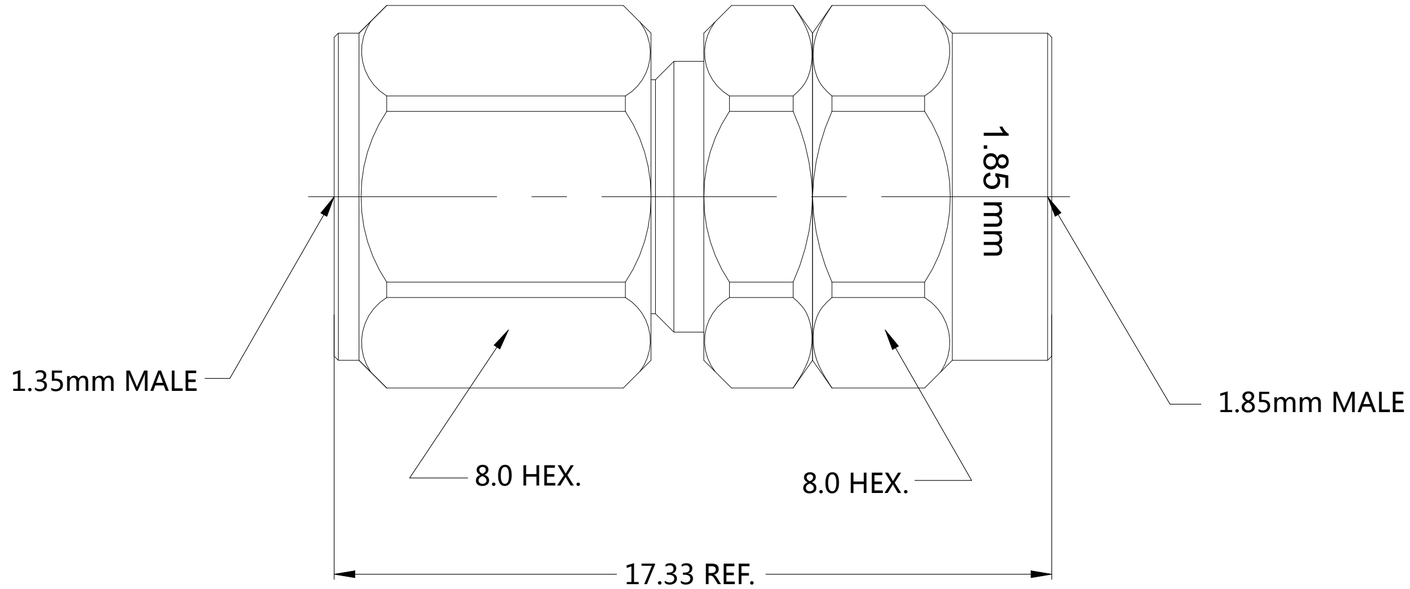

ELECTRICAL	MECHANICAL	ENVIRONMENTAL
Impedance (Ohm): 50 Frequency Range:DC to 67GHz Voltage Rating (Peak) @ Sea Level 150 V RMS Insulation Resistance (MIN.) 5000 M ohms Contact Resistance (mohms MAX) Center Contact 4.0 Outer Contact 1.0 Dielectric Withstand Voltage: 500 V RMS Max Insertion Loss : TBD VSWR: <1.33 @ DC~67GHz	Interface Dimension 1.85mm male and 1.35mm male Force to Engage and Disengage Engage: N/A Disengage: N/A Center Cantact Captivation Axial (N) 26.0 MIN Radial (In/Oz) N/A Cable Retention Axial (Lbs) N/A Mating cycles 500 cycles	TEMPERATURE RANGE -40 ℃~+85 ℃ ROHS COMPLIANT

1	SHELL	STAINLESS STEEL	PASSIVATION
1	CONTACT PIN	BERYLLIUM COPPER	GOLD 50 u"/NICKEL /COPPER
1	INSULATOR	PEI	N/A
1	BODY	STAINLESS STEEL	PASSIVATION
2385340-1	PART NUMBER	MATERIAL	PLATING

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± 0.3
2 PLC ± 0.2
3 PLC ± 0.1
4 PLC ± –
ANGLES ± 5°

MATERIAL –

FINISH –

DWN PENG ZHAI 27JAN2021
CHK ROGER SONG 27JAN2021
APVD WENKE HE 27JAN2021
PRODUCT SPEC –
APPLICATION SPEC –
WEIGHT –

TE Connectivity

NAME 1.35mm Male to 1.85mm Male Adapter
–

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	C-2385340	–

CUSTOMER DRAWING | SCALE 1:1 | SHEET 1 OF 1 | REV A

2385340