
THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
© COPYRIGHT 20 BY - ALL RIGHTS RESERVED.

LOC	DIST
FX	00


REVISIONS


P	LTR	DESCRIPTION	DATE	DWN	APVD
	A2	REVISED PER ECR-10-012887	17JUN2010	VSS	MB
	B	REVISED PER ECO-14-001745	06FEB2014	DD	SA

⚠1 MARK DATE CODE IN APPROXIMATE LOCATION.

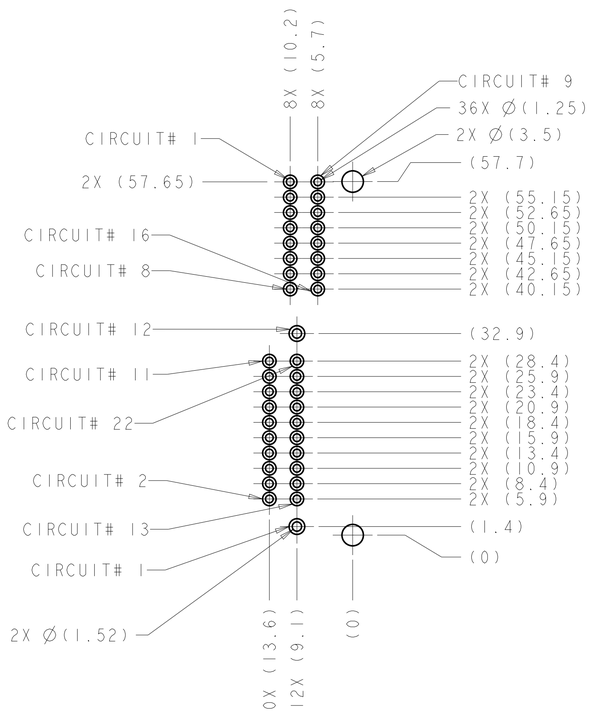


RECOMMENDED
PCB LAYOUT
CONNECTOR SIDE
(RECOMMENDED BOARD THICKNESS 1.57mm)

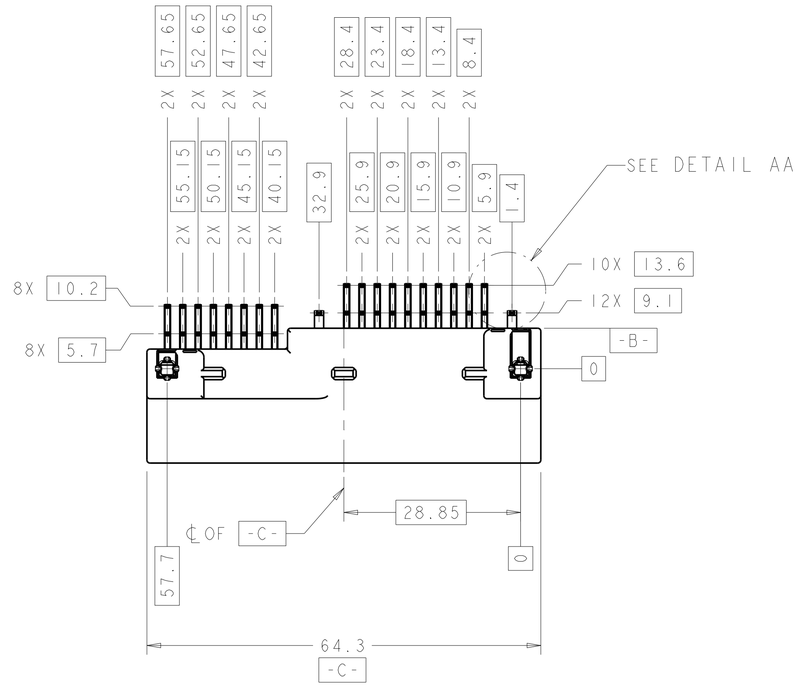


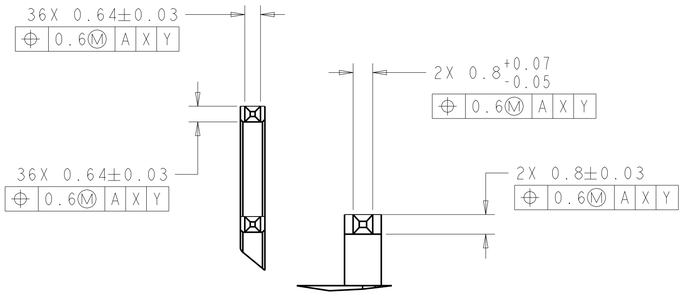


DETAIL AA
SCALE 8:1





SECTION D-D

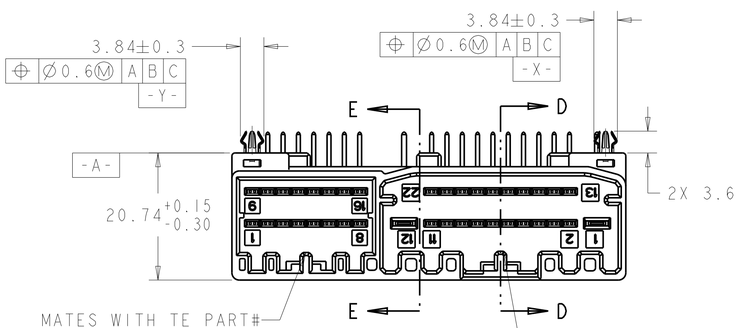

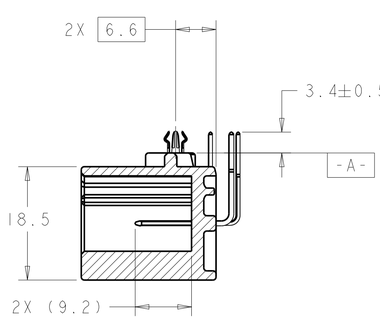


SECTION E-E

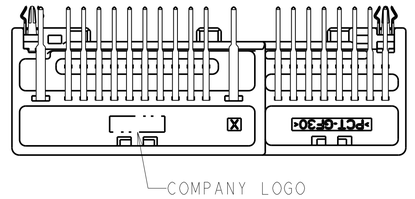





9-1438789-2 REF
SCALE 1:1




9-1438789-2 REF
SCALE 1:1

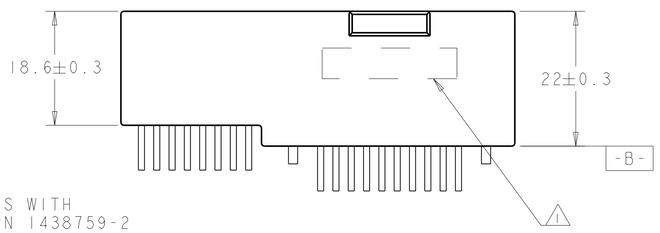

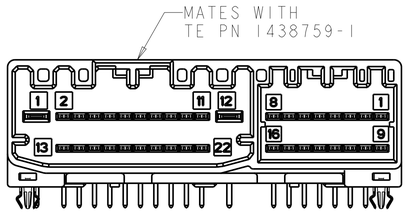

9-1438789-2

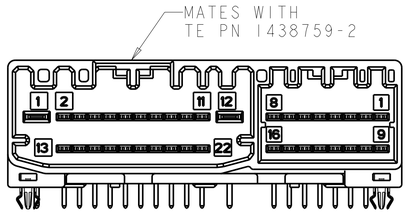

9-1438789-3

BRASS	PRE-TIN	BRASS	POST-TIN	PCT	BLACK	9-1438789-3
BRASS	PRE-TIN	BRASS	POST-TIN	PCT	BLACK	9-1438789-2
MATERIAL	FINISH	MATERIAL	FINISH	MATERIAL	COLOR	PART NUMBER
BOARDLOCK		CONTACT		HOUSING		

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm
TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±0.3
1 PLC ±0.3
2 PLC ±0.1
3 PLC ±-
4 PLC ±-
ANGLES ±2
MATERIAL -
FINISH -

DWN W MCALLISTER 08SEP2004
CHK G MARTIN 21SEP2004
APVD T MEHAFFEY 21SEP2004
PRODUCT SPEC -
APPLICATION SPEC 114-13158
WEIGHT -

TE Connectivity

NAME 38 POSITION CAP ASSEMBLY, HYBRID MULTILOCK, 22P .040/2.8 HYBRID + 16P .040

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A1	00779	C-1438789	-

Customer Drawing | SCALE 2:1 | SHEET 1 OF 1 | REV C