


© 2025 TE Connectivity. All Rights Reserved.


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	B	ECR-15-013292	24SEP2015	DL	CW
	C	ECR-21-105887	26JUL2021	BS	CW
	D	ECR-22-150866	23SEP2022	DL	CW
	E	ECR-25-237606	30MAY2025	ABS	RB

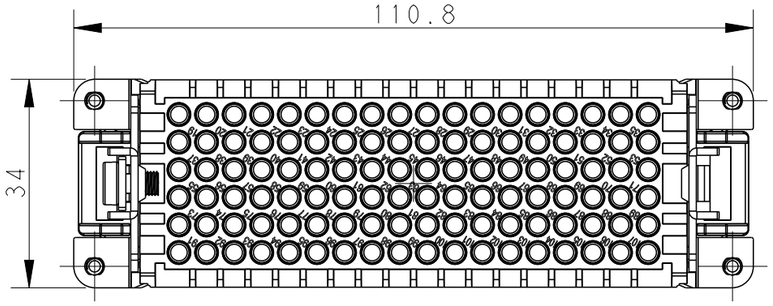

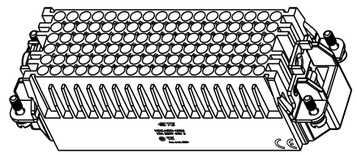

SCALE 1:2

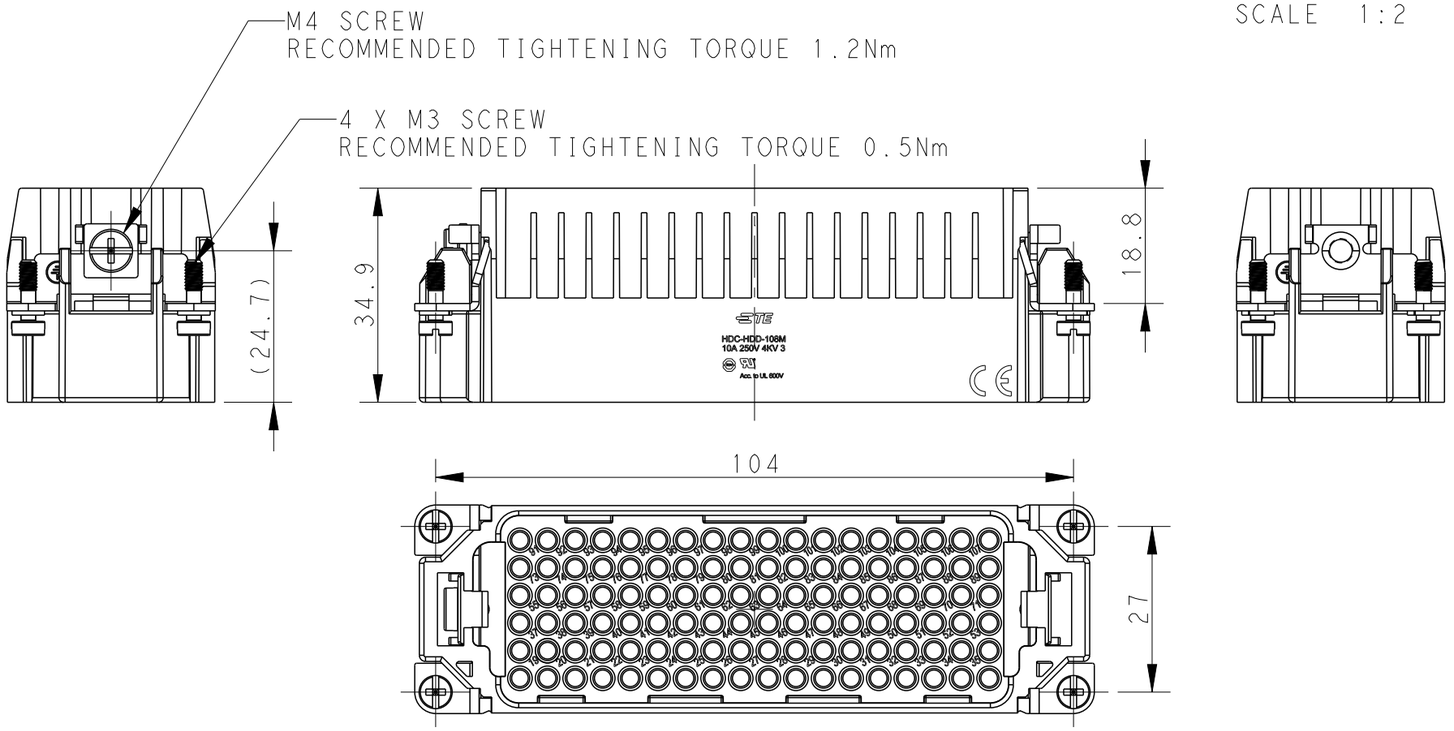

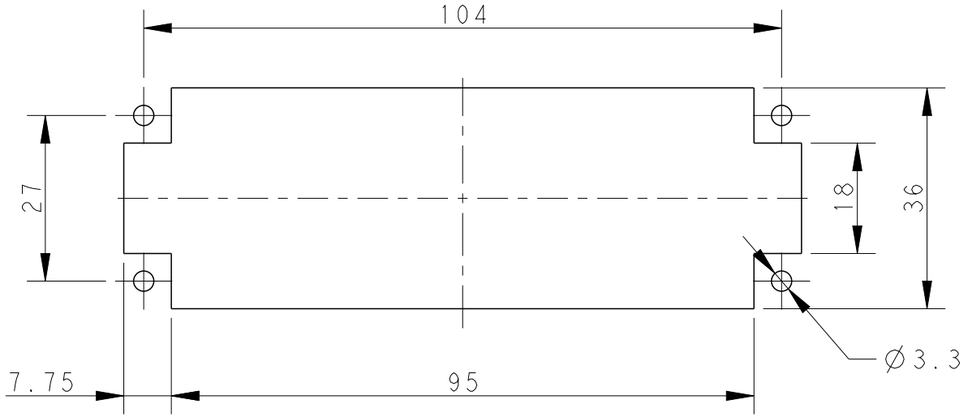

PANEL CUT OUT FOR INSERTS FOR USING
WITHOUT HOODS/HOUSINGS

NOTES:
1. TECHNICAL CHARACTERISTICS:
   INSULATION MATERIAL: PC
   RATED VOLTAGE: 250 V
   RATED CURRENT: 10 A
   INSULATION RESISTANCE: >=400MΩ
   RATED IMPULSE VOLTAGE: 4 KV
   POLLUTION DEGREE: 3
   FLAMMABILITY: UL94V-0
   MATING CYCLES: 500 CYCLES
   WIRE RANGE: 0.14-2.5 mm^2 (26-14 AWG)
   CONTACT TYPE: CRIMP CONTACT
2. CONTACT NEED TO BE ORDERED SEPARATELY.
   (ORDER No. REFER TO DRAWING: T20200X10XX000)

注释：
1. 技术参数：
   绝缘材料： PC
   额定电压： 250V
   额定电流： 10A
   绝缘电阻： >=400MΩ
   额定脉冲电压： 4 KV
   污染等级： 3
   阻燃等级： UL94V-0
   插拔次数： 500次
   接线范围： 0.14-2.5 mm^2 (26-14 AWG)
   接线类型： 冷压接
2. 端子需要单独订购，
   （订货号参考图面： T20200X10XX000）

HDD-108-M	T2031082101-000
DESCRIPTION	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:
mm	0 PLC ±- 1 PLC ±- 2 PLC ±- 3 PLC ±- 4 PLC ±- ANGLES ±-
MATERIAL: - / -	FINISH: - / -

DWN	DAVID LI 18MAR2015
CHK	CHRIS WANG 18MAR2015
APVD	XU XIANG 18MAR2015
PRODUCT SPEC	108-137043
APPLICATION SPEC	114-137043
WEIGHT	-

TE Connectivity

NAME: HDD-108-M

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	-	C-T2031082101000	-

CUSTOMER DRAWING | SCALE 1:1 | SHEET 1 OF 1 | REV E

1470-19 (3/13)