


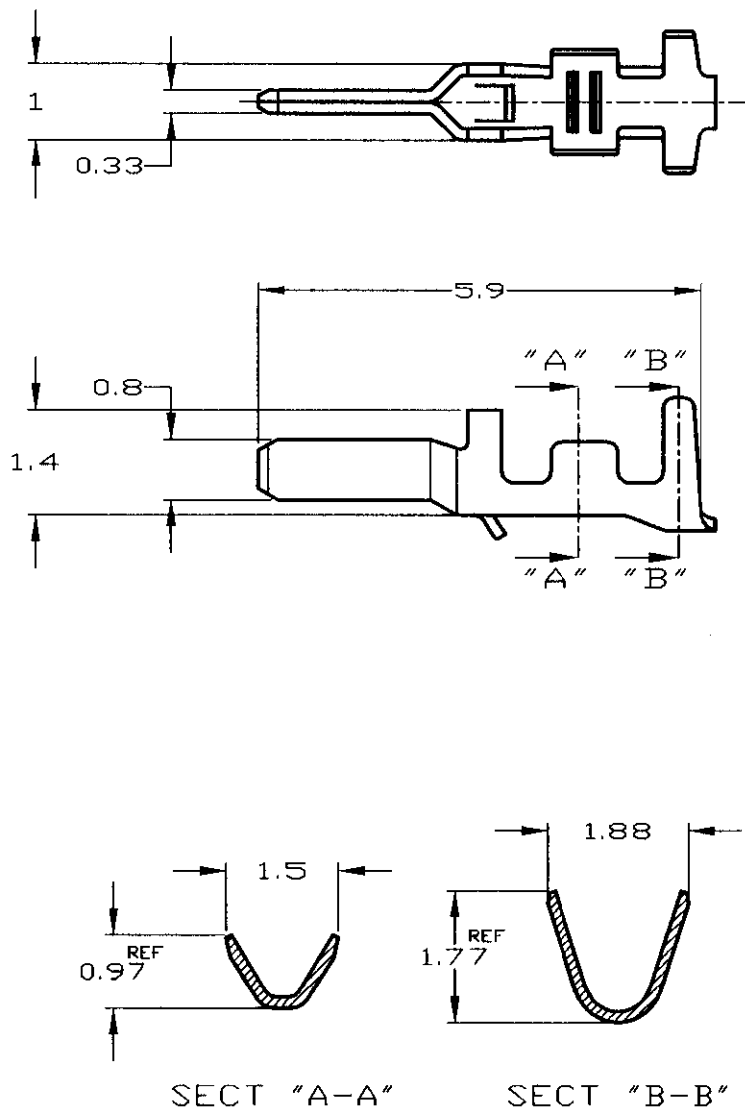

注記

- 製品規格;108-5505.
- 取付適用規格;114-5212

NOTES

- PRODUCT SPECIFICATION;108-5505.
- APPLICATION SPECIFICATION;114-5212.

真鍮 1.27μm以上のNi下地めっきの上に接触部0.2μm以上のAuめっき、その他Auフラッシュ BRASS FINISH UNDER Ni 1.27μm MIN, CONTACT AREA Au 0.2μm MIN, OTHER Au FLASH		917571-4
銅めっき済み真鍮 PRE-TIN BRASS		917571-1
材質/仕上げ MATERIAL/FINISH		AMP 型番 P/N
Copyright ©1995* Tyco Electronics AMP K.K. Copyright ©1995 Tyco Electronics AMP K.K. ALL RIGHTS RESERVED.		AMP Tyco Electronics AMP K.K. Kawasaki, Japan
一般公差 (GENERAL TOLERANCE) 10mm ±0.2 10mm 30mm ±0.25 30mm 100mm ±0.3 角 度 ±3°		絶縁外径 (INSULATION DIA.) 0.055-0.141 mm2(AWG30 - 26) 0.70-0.98 mm φ
材料 (MATERIAL) SEE TABLE		仕上 (FINISH) SEE TABLE
10-1 A4 J		REV. A SHEET 1 OF 1
DR. Y.KATO 30/JUN/95 DE. Y.KATO 30/JUN/95 CHK. I.HASEGAWA 03/JUL/95 APP. I.HASEGAWA 03/JUL/95		10-1 A4 J 917571 A
名義 (NAME) ポスト コンタクト MINI VP 1.5mm WIRE TO BOARD コネクタ POST CONT. MINI VP 1.5mm WIRE TO BOARD CONN.		