
THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -,- .
© COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST
BD	39

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	F	0G3B-0317-03	24APR03	TK	GS

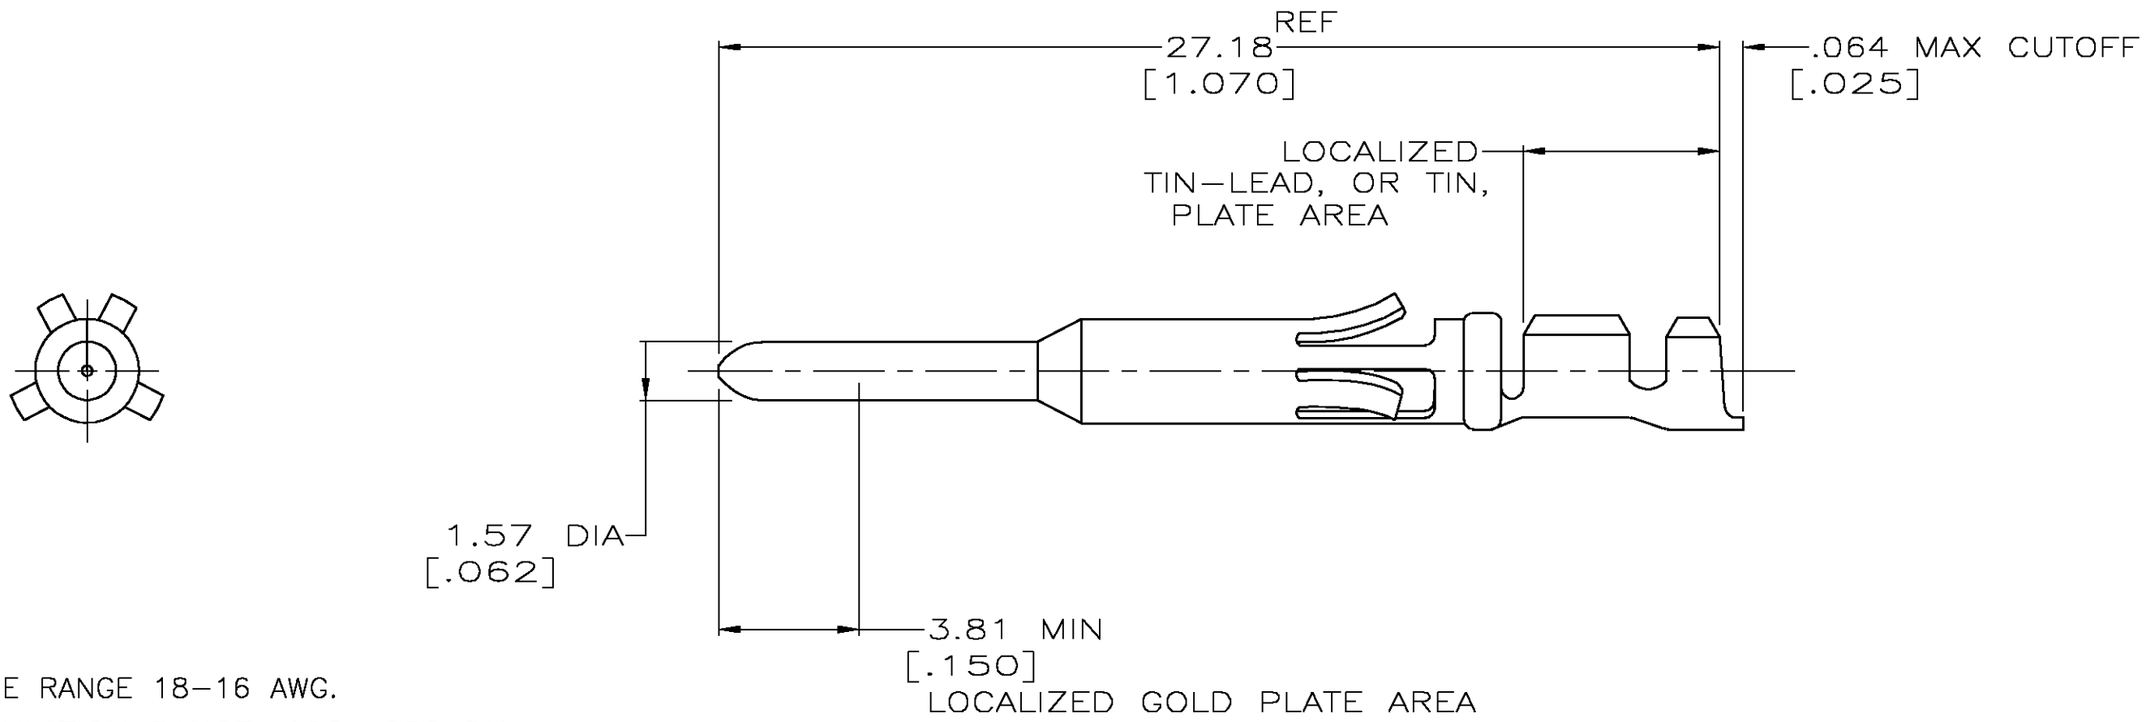

1. WIRE RANGE 18-16 AWG.
2. INSULATION RANGE .100-.080 DIA.
3. FOR STRIP PART SEE DWG 66579.

△4 0.76μm [.000030] MIN GOLD IN LOCALIZED GOLD PLATE AREA, 1.27μm [.000050] MIN TIN-LEAD IN LOCALIZED TIN-LEAD PLATE AREA, BOTH OVER 1.27μm [.000050] MIN NICKEL.

△5 TIN PLATED.

△6 GOLD PLATING PER MIL-G-45204, TIN PER MIL-T-10727 AND NICKEL PER QQ-N-290.

△7 0.76μm [.000030] MIN GOLD IN LOCALIZED GOLD PLATE AREA, 1.27μm [.000050] MIN TIN IN LOCALIZED TIN PLATE AREA, BOTH OVER 1.27μm [.000050] MIN NICKEL.

△7	66589-4
△4	66589-2
△5	66589-1
FINISH	FINISH

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± -
1 PLC ± -
2 PLC ± 0.13 [.005]
3 PLC ± -
4 PLC ± -
ANGLES ± -

MATERIAL: BRS PER MIL-C-50

FINISH: △6 SEE TABLE

DWN	C.OBERMAN	08/25/92
CHK	W.G.LENKER	9-3-92
APVD	A. TRAVIS A.TRAVIS	9-3-92
PRODUCT SPEC	- - —	
APPLICATION SPEC	—	
WEIGHT	—	

CUSTOMER DRAWING

tyco Electronics — Tyco Electronics Corporation, Harrisburg, Pa

NAME: CONTACT, PIN, LOOSE PIECE, TYPE VI, MULTIMATE

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-66589	—

SCALE	SHEET	REV
6:1	1 OF 1	F