


THIRD ANGLE
PROJECTION



- 1 BARREL TERMINALS WILL ACCEPT ONE OR TWO WIRES OF THE SAME SIZE PER TERMINAL.
WIRE SIZE FOR SOLID AND STRANDED WIRES:
0,12 mm² (26 AWG)–0,35 mm² (22 AWG).
MAXIMUM INSULATION DIA. 1,2 mm.
- 2 STUFFER CAP IS SHIPPED NOT ASSEMBLED.
- 3 MATERIALS: STUFFER CAP — A.B.S. UL 94HB
BARREL TERMINALS — PHOS.BRONZE, PRE-TINPLATED.
CONTACTS — PHOS.BRONZE, PLATED 1,25μm
SELECTIVE GOLD OVER 1,25μm NICKEL.
HOUSING — PBT, UL 94HB
- 4 FOR 216005–4 DIMENSION 15,2 IS 14,6 ,
CORRESPONDING WITH THE MARKED DASH LINES

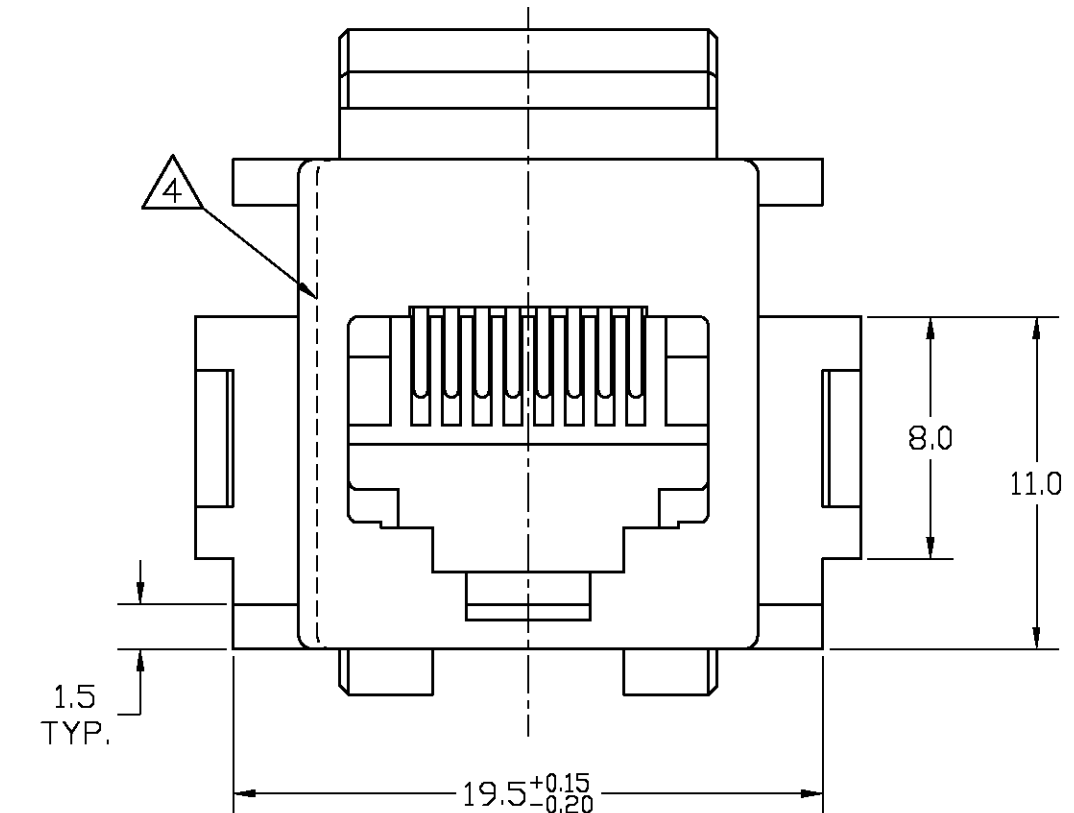


SUGGESTED PANEL CUTOUT DIMENSIONS				SCALE 2 : 1	
X-216005-1		X-216005-4 AND X-216005-5			
CUTOUT FOR BACK PANEL MOUNTING		CUTOUT FOR FRONT PANEL MOUNTING		CUTOUT FOR BACK PANEL MOUNTING	
CUTOUT FOR FRONT PANEL MOUNTING		PANEL THICKNESS: 1,6 mm NOMINAL			
11	10	9	8	7	

TOLERANCE: $\pm 0,15$ UNLESS SPECIFIED OTHERWISE

500 PCS. IN A BOX	SEE NOTE 	HOUSING COLOR: BLACK	216005-4
		SEE NOTE 	216005-1
PACKAGING	FINISH	MATERIAL	PARTNUMBER

CUSTOMER DRAWING	FOR REFERENCE ONLY WILL NOT BE UPDATED
------------------	---

THIS DRAWING IS UNPUBLISHED
RELEASED FOR PUBLICATION .19



TE Connectivity

[illegible]

11 TOOLLESS MODULAR JACK KIT

8 POS., FOR DISCRETE WIRES

P1		REVISED PER ECO-11-005294		RK	HMR	05APR11		NAME	
LTR.		REVISION RECORD		DR.	CHK.	DATE		TOOLLESS MODULAR JACK KIT	
								8 POS., FOR DISCRETE WIRES	
DR.: J.V.UEMPT		CHK.: W.BRUMMANS		APP.: L. SOEST		DWG.No.			
DATE: 21 JAN 91		DATE:		DATE: 12 OCT 99		C-216005			
								REV.LTR.	SHEET
								P1	1 OF 1
									A2