

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

COPYRIGHT



BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC


DIST

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	RELEASED	27.JUN.'05	BH	CS
	B	REVISED(ECR-05-016394)	02DEC.'05	BH	JK

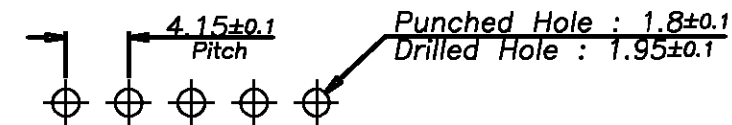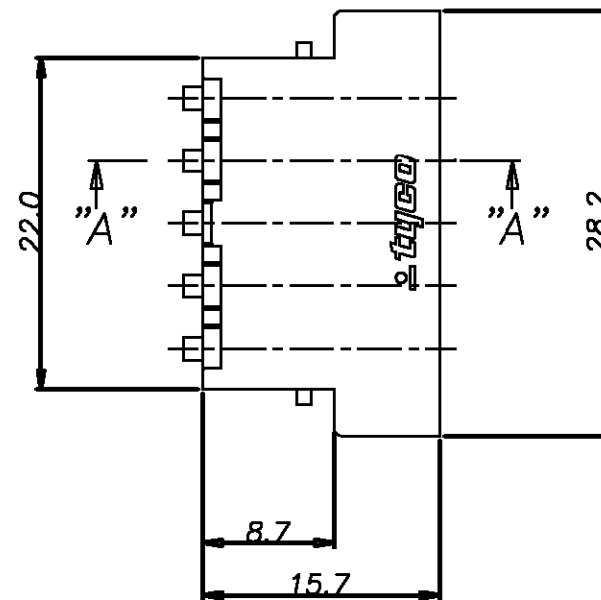

RECOMMENDED PCB LAYOUT




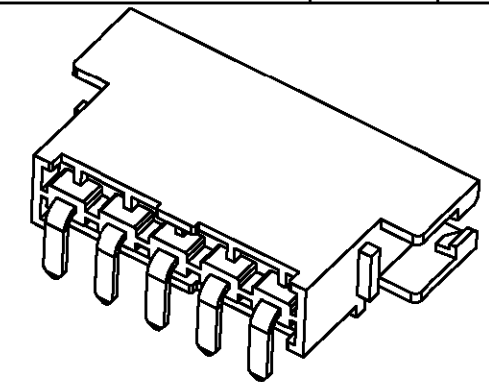


주 기



- 내열 내한성 시험: 80° C 1시간, -30° C 1 시간
상은 1시간을 1 CYCLE로 하여 연속적으로 20 CYCLE 온도를 변화시켰을 때 홀(CRACK)등이 발생하지 않을 것.
- 상대물(tyco AMP: 1743401)과 삽입시 이상이 없고 lock된 상태로 5Kgf의 힘을 축방향으로 1 분간 당겨 견딜 것.
- MATERIAL
TERMINAL : BRASS (POST PLATED)
HEADER HOUSING : 6/6 NYLON AMILAN V-0
- 일반 공차 : ±0.3

NOTES


- AFTER 20 CYCLES(1CYCLES : 1 HOURS AT 80
1 HOURS AT -30AT ROOM TEMPERATURE)
THERE SHOULD NOT BE CRACK.
- SEPERATION FORCE : 5Kgf MIN.
MATING HOUSING : 1743401-X
- MATERIAL
TERMINAL : BRASS(POST PLATED)
HEADER HOUSING : 6/6 NYLON
- GENERAL TOLERANCES : ±0.3

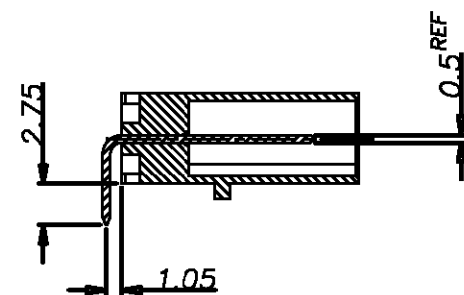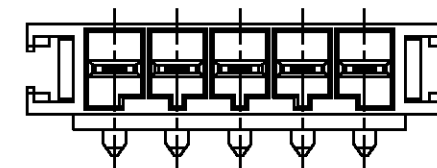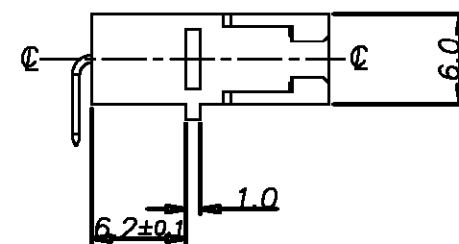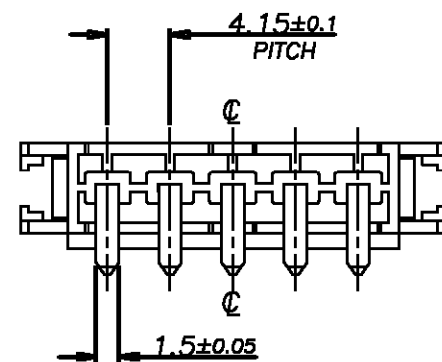

SECTION "A-A"

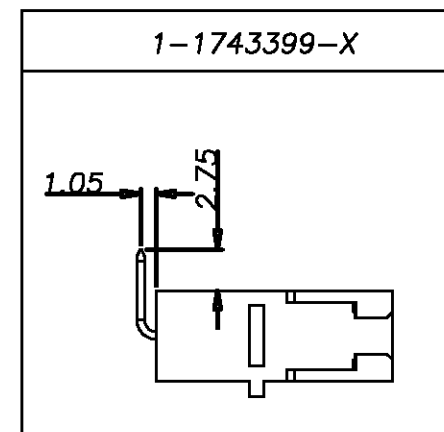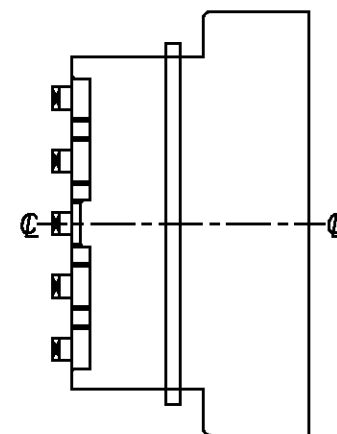

BLUE	1-1743399-8
YELLOW	1-1743399-1
NATURAL	1743399-1
COLOR	ASS'Y P/N

THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.		DWN : BH CHO		tyco Electronics		AMP KOREA. kyungsan, korea					
DIMENSIONS: MM		CHK : BW KANG									
 3rd ANGLE PROJECTION		APVD : JK SONG		NAME HALL SENSOR 5P HEADER ASS'Y							
		PRODUCT SPEC									
MATERIAL		APPLICATION SPEC		SIZE		CAGE CODE		DRAWING NO		RESTRICTED TO	
		WEIGHT		A3		00779		C=		1743399	
TOLERANCES UNLESS OTHERWISE SPECIFIED		FINISH		CUSTOMER DRAWING							
0 PLC ±		-		SCALE		SHEET		1 OF 1		REV B	
1 PLC ±											
2 PLC ±											
3 PLC ±											
4 PLC ±											
ANGLES ±											