
# Pomona®

# Model 6365 IEC 1010 Compliant Replacement Test Lead Set For Sheathed Style DMM's

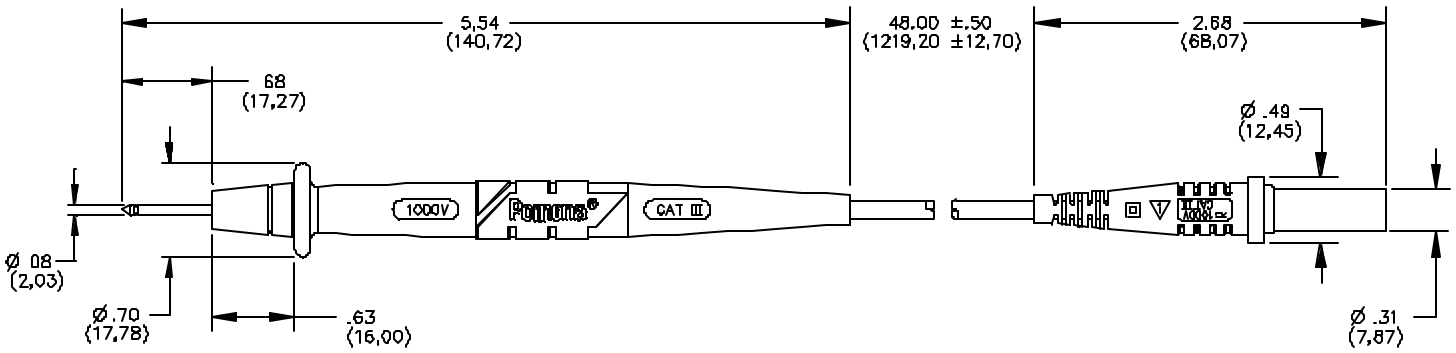


**FEATURES:**

- Designed for Fluke, H-P, Tektronix and Wavetek DMM's with a safety style of sheathed banana jack.
- Probe body incorporates a two step mold process. First step is Polypropylene for probe rigidity. Second step is Santoprene® rubber for handling comfort, added insulation protection and wire strain relief.
- Probe test leads are designed with over-voltage spike protection of up to 6kV.
- Probe body and banana plug are molded directly to the wire for robust pull strength.
- Wire is a high strand count silicone wire for extreme flexibility and high temperature resistance.
- Banana plug spring is nickel-plated beryllium copper for long insertion life.

**MATERIALS:**

Probe Body: Outer Insulation - Santoprene® Rubber, Color: Gray
Inner Insulation – Polypropylene, Fire Retardant, Color: One Black, One Red
Tip: Brass
Wire: 18 AWG, 65 x 36 Tinned Copper Stand, Silicone Insulation, Length: 48" (122cm), O.D. .144" (3,66mm)
Banana Plug: Body – Brass, Nickel Plated
Spring – Beryllium Copper, Nickel Plated
Insulation – PVC, Color: One Black, One Red

**RATINGS:**

IEC 1010-2-031, Category III, P2 Compliant
Operating Voltage: 1000 VRMS/DC
Current: 10 Amperes

**ORDERING INFORMATION:** Model 6365 Includes a set of one black and one red test lead

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (,51 mm), .xxx = ± .005" (,127 mm).
All specifications are to the latest revisions. Specifications are subject to change without notice.
Registered trademarks are the property of their respective companies. Made in USA



**Sales: 800-490-2361 Fax: 888-403-3360**
**Technical Assistance: 800-241-2060**

Pomona*ACCESS* **90732** (800) 444-6785 or (425) 446-6010
More drawings available at www.pomonaelectronics.com