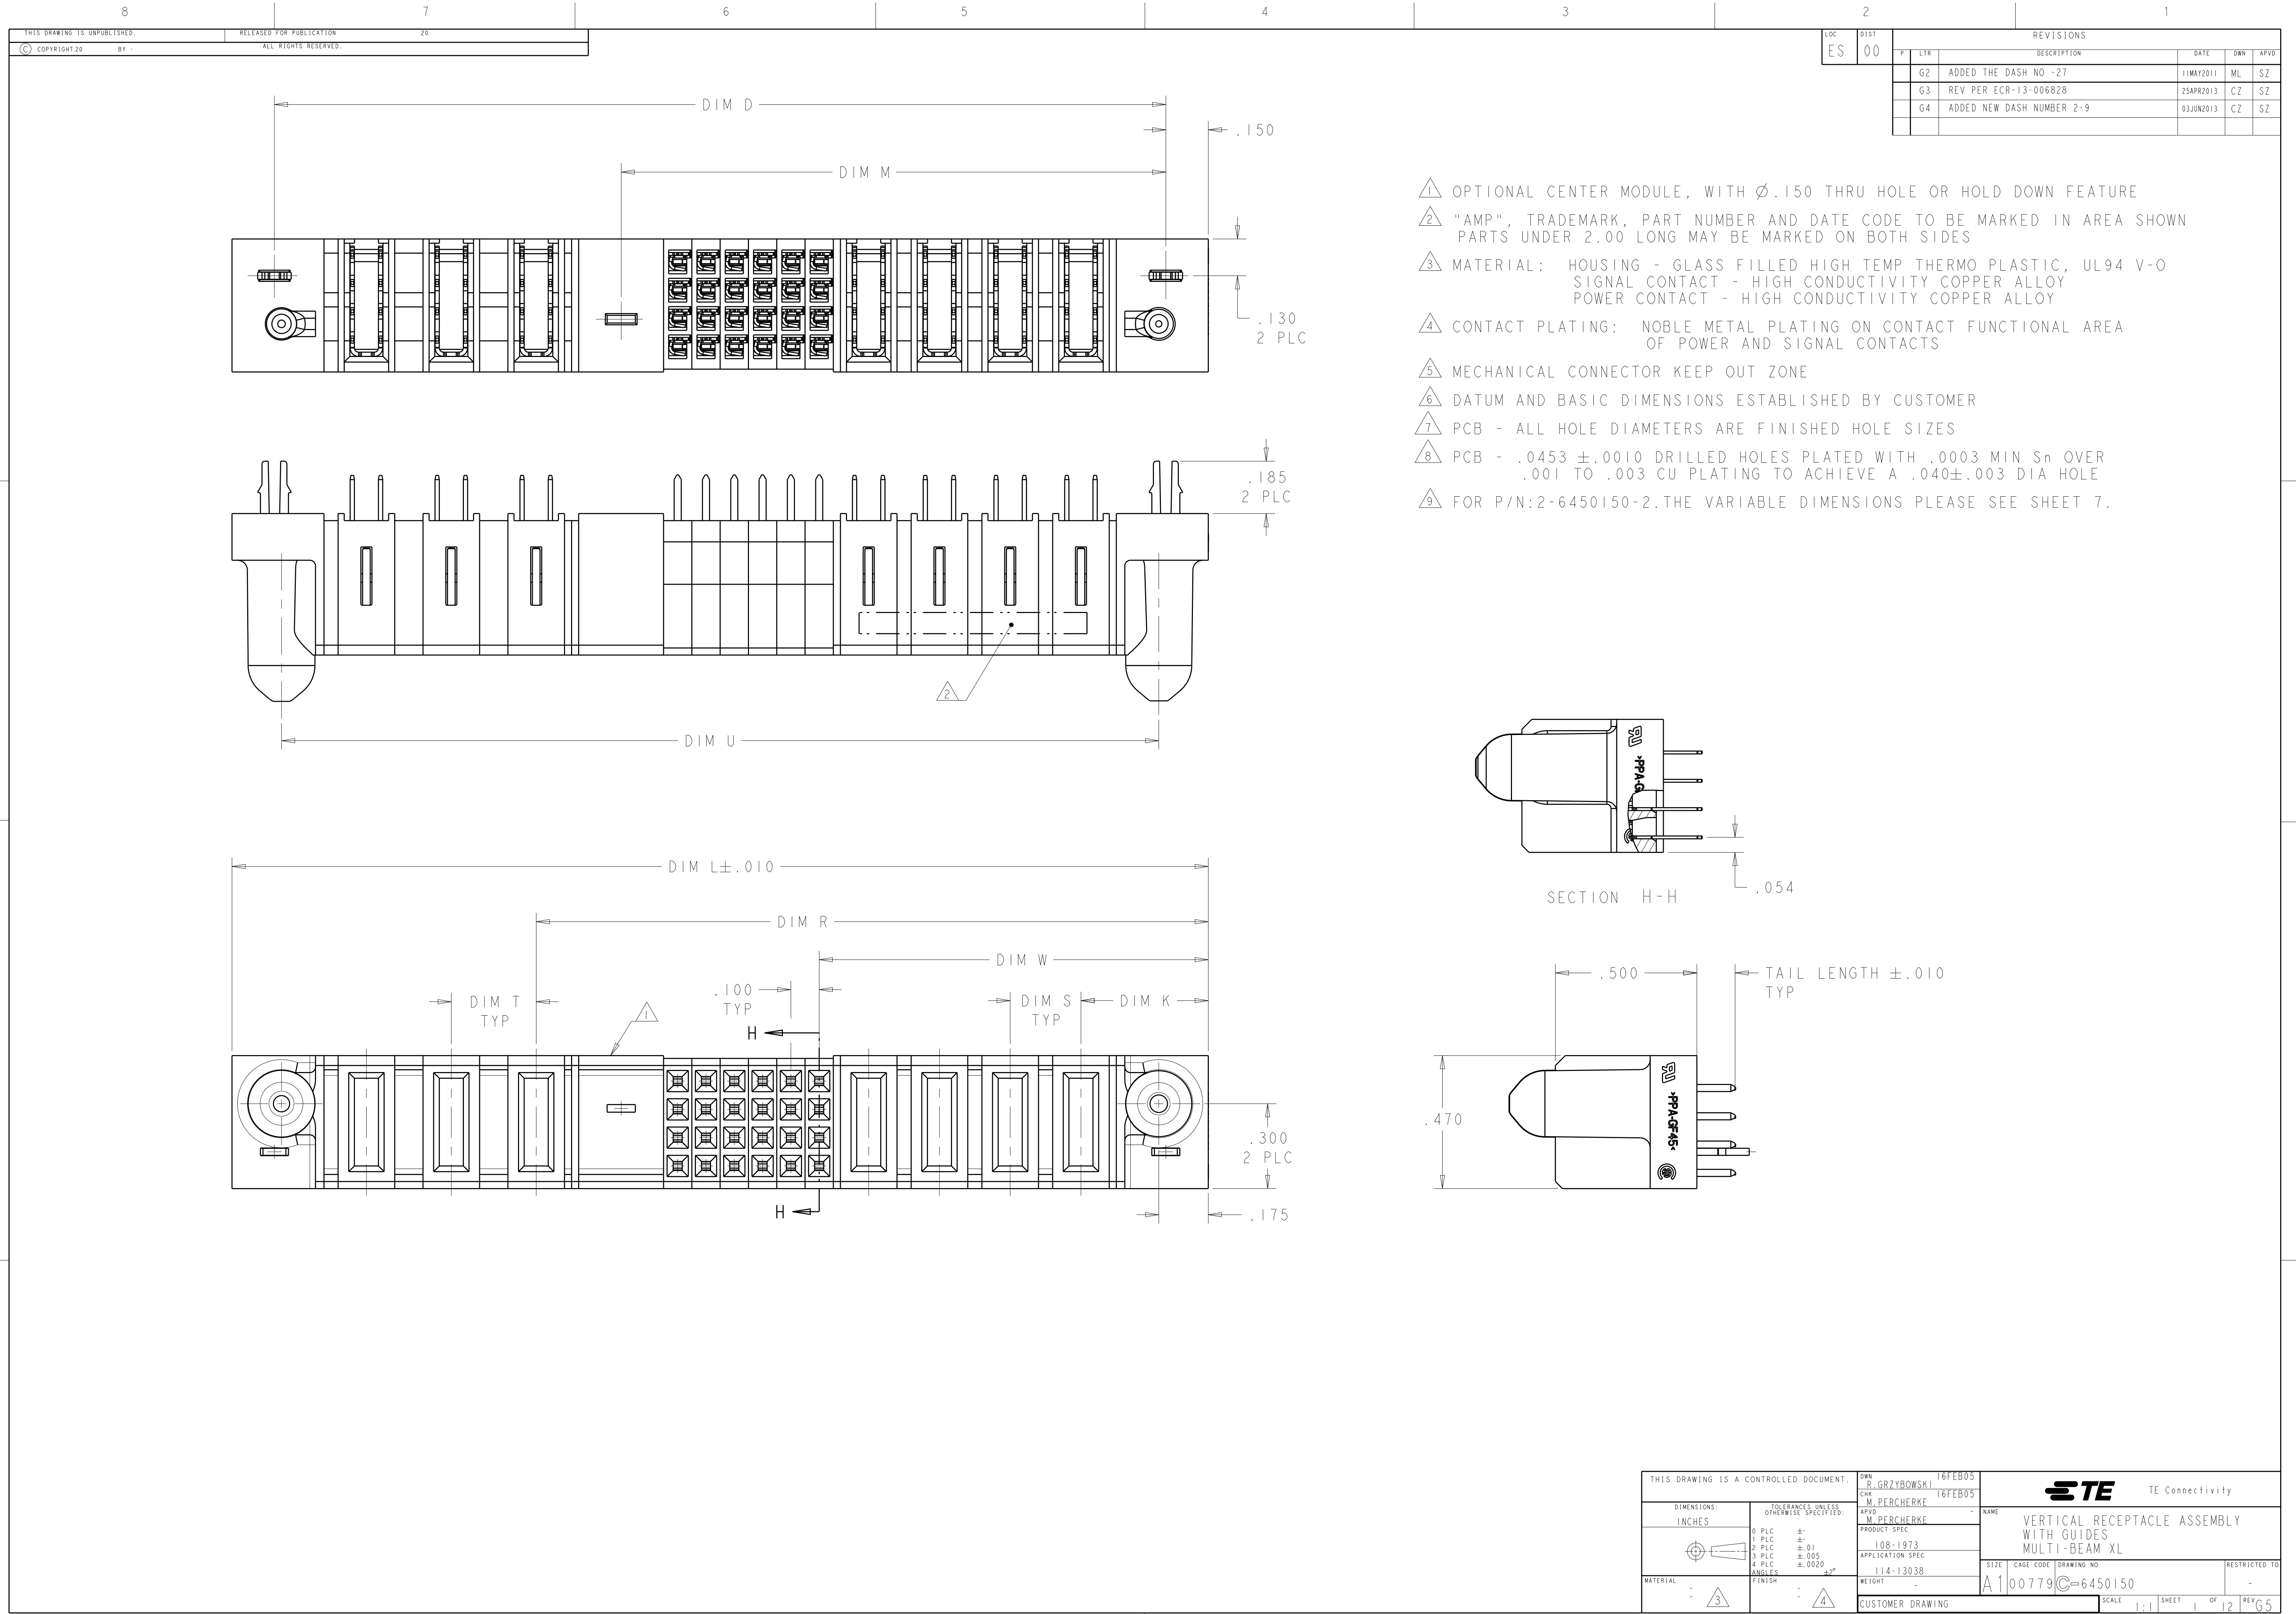
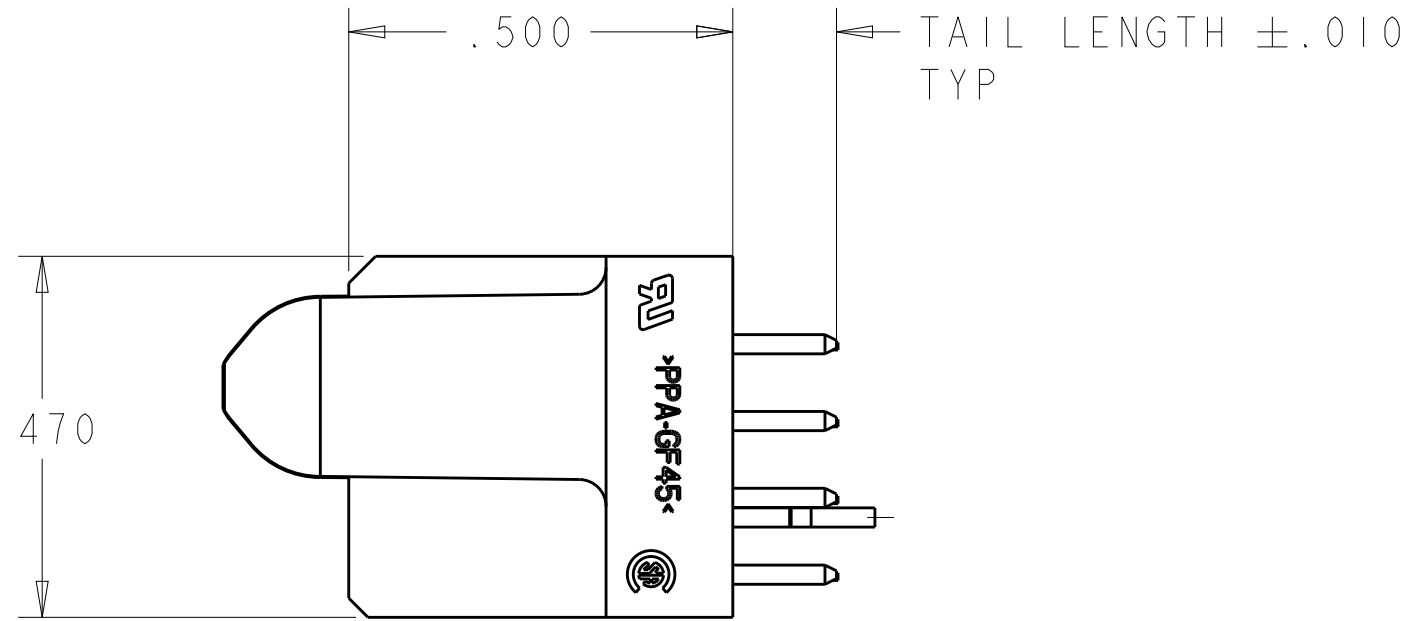
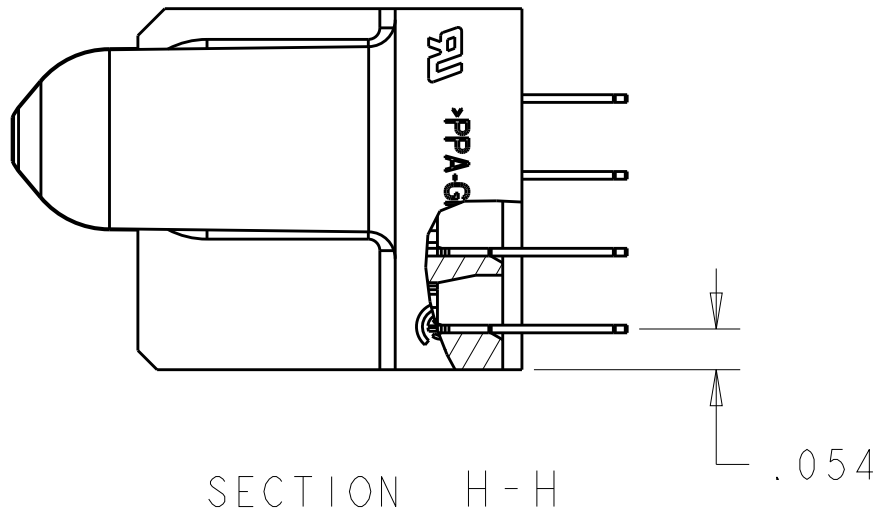




LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
ES	00	G2		ADDED THE DASH NO -27	11MAY2011	ML
		G3		REV PER ECR-13-006828	25APR2013	CZ
		G4		ADDED NEW DASH NUMBER 2-9	03JUN2013	CZ

- 1 OPTIONAL CENTER MODULE, WITH Ø.150 THRU HOLE OR HOLD DOWN FEATURE
- 2 "AMP", TRADEMARK, PART NUMBER AND DATE CODE TO BE MARKED IN AREA SHOWN
PARTS UNDER 2.00 LONG MAY BE MARKED ON BOTH SIDES
- 3 MATERIAL: HOUSING - GLASS FILLED HIGH TEMP THERMO PLASTIC, UL94 V-0
SIGNAL CONTACT - HIGH CONDUCTIVITY COPPER ALLOY
POWER CONTACT - HIGH CONDUCTIVITY COPPER ALLOY
- 4 CONTACT PLATING: NOBLE METAL PLATING ON CONTACT FUNCTIONAL AREA
OF POWER AND SIGNAL CONTACTS
- 5 MECHANICAL CONNECTOR KEEP OUT ZONE
- 6 DATUM AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER
- 7 PCB - ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES
- 8 PCB - .0453 ±.0010 DRILLED HOLES PLATED WITH .0003 MIN Sn OVER
.001 TO .003 CU PLATING TO ACHIEVE A .040±.003 DIA HOLE
- 9 FOR P/N:2-6450150-2.THE VARIABLE DIMENSIONS PLEASE SEE SHEET 7.




THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R.GRZYBOWSKI 16FEB05	TE Connectivity	
		CHK M.PERCHERKE 16FEB05		
DIMENSIONS:		APVD W.PERCHERKE -	NAME	
INCHES		PRODUCT SPEC		
		108-1973	SIZE	
		APPLICATION SPEC		
MATERIAL		114-13038	CAGE CODE	
		WEIGHT		
		CUSTOMER DRAWING		
		SCALE 1:1	SHEET 1 OF 12	
				REV G5

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
ES	00	-	-	SEE SHEET 1	-	-	-

64	WITH	2.650	.200	.250	1.550	.875	2.700	-	3.000	.450	2P + 24S + 6P	2-6450150-9
	WITH	2.300	.250	.300	1.950	1.275	2.350	-	2.650	.475	3ACP + 24S + 2P	2-6450150-8
	WITH	5.150	.300	.300	3.550	2.700	5.200	-	5.500	.450	8ACP + 32S + 6ACP	2-6450150-7
	WITH	2.800	.300	.250	2.075	1.375	2.850	-	3.150	.450	4P + 24S + 3ACP	2-6450150-6
	WITH	3.800	.300	.250	1.875	1.375	3.850	-	4.150	.450	4P + 16S + 7ACP	2-6450150-5
	WITH	2.400	.200	.200	2.100	.825	2.450	-	2.750	.450	2P + 48S + 2P	2-6450150-4
	WITH	1.700	.250	.250	1.350	.875	1.750	-	2.050	.450	2P + 16S + 2P	2-6450150-3
	WITHOUT	5.500	.300	.300	3.175	2.525	5.550	-	5.850	.475	7ACP+20S+4ACP+5P	2-6450150-2
	WITH	2.900	.250	.250	2.550	.875	2.950	-	3.250	.450	2P + 64S + 2P	2-6450150-1
	WITH	3.550	-	.300	2.550	1.275	3.600	-	3.900	.475	3ACP + 48S + 5P	2-6450150-0
	WITH	4.000	-	-	-	.375	4.050	-	4.350	-	148S	1-6450150-9
	WITH	2.800	.250	.250	1.700	1.125	2.850	-	3.150	.450	3P + 20S + 5P	1-6450150-8
	WITH	2.200	.250	.250	1.350	.875	2.250	-	2.550	.450	2P + 16S + 4P	1-6450150-7
	WITH	3.500	.300	.250	2.775	2.375	3.550	-	3.850	.450	8P + 12S + 3ACP	1-6450150-3
	WITH	2.300	.250	.300	1.950	1.275	2.350	-	2.650	.475	3ACP + 24S + 2P	6450150-9
	WITH	1.575	-	-	1.425	.700	1.625	-	1.925	.475	1P + 24S + 1P	6450150-8
	WITH	3.000	.250	.250	2.150	1.425	3.050	-	3.350	.450	4P + 24S + 4P	6450150-6
	WITH	2.500	.300	.250	1.800	1.125	2.550	-	2.850	.450	3P + 24S + 3ACP	6450150-5
	WITH	2.675	.200	.200	2.375	1.650	2.725	-	3.025	.475	5P + 24S + 2P	6450150-4
	WITH	2.800	.300	.250	2.075	1.375	2.850	-	3.150	.450	4P + 24S + 3ACP	6450150-3
	WITH	3.550	-	.300	2.550	1.275	3.600	-	3.900	.475	3ACP + 48S + 5P	6450150-2
	WITH	4.350	.250	.250	3.500	2.625	4.400	-	4.700	.450	9P + 32S + 4P	6450150-1
	HOLD DOWN	U	T	S	R	W	D	M	L	K	DESCRIPTION	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
INCHES



MATERIAL
-

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC
1 PLC
2 PLC
3 PLC
4 PLC
ANGLES
FINISH

±"
±.01
±.005
±.0020
±2°
-

DWN
R.GRZYBOWSKI
CHK
M.PERCHEKKE
APVD
M.PERCHEKKE

16FEB05
16FEB05

PRODUCT SPEC
108-1973
APPLICATION SPEC
114-13038
WEIGHT
-

CUSTOMER DRAWING

TE Connectivity

NAME
VERTICAL RECEPTACLE ASSEMBLY
WITH GUIDES
MULTI-BEAM XL

SIZE
A1

CAGE CODE
00779

DRAWING NO
6450150

RESTRICTED TO
-

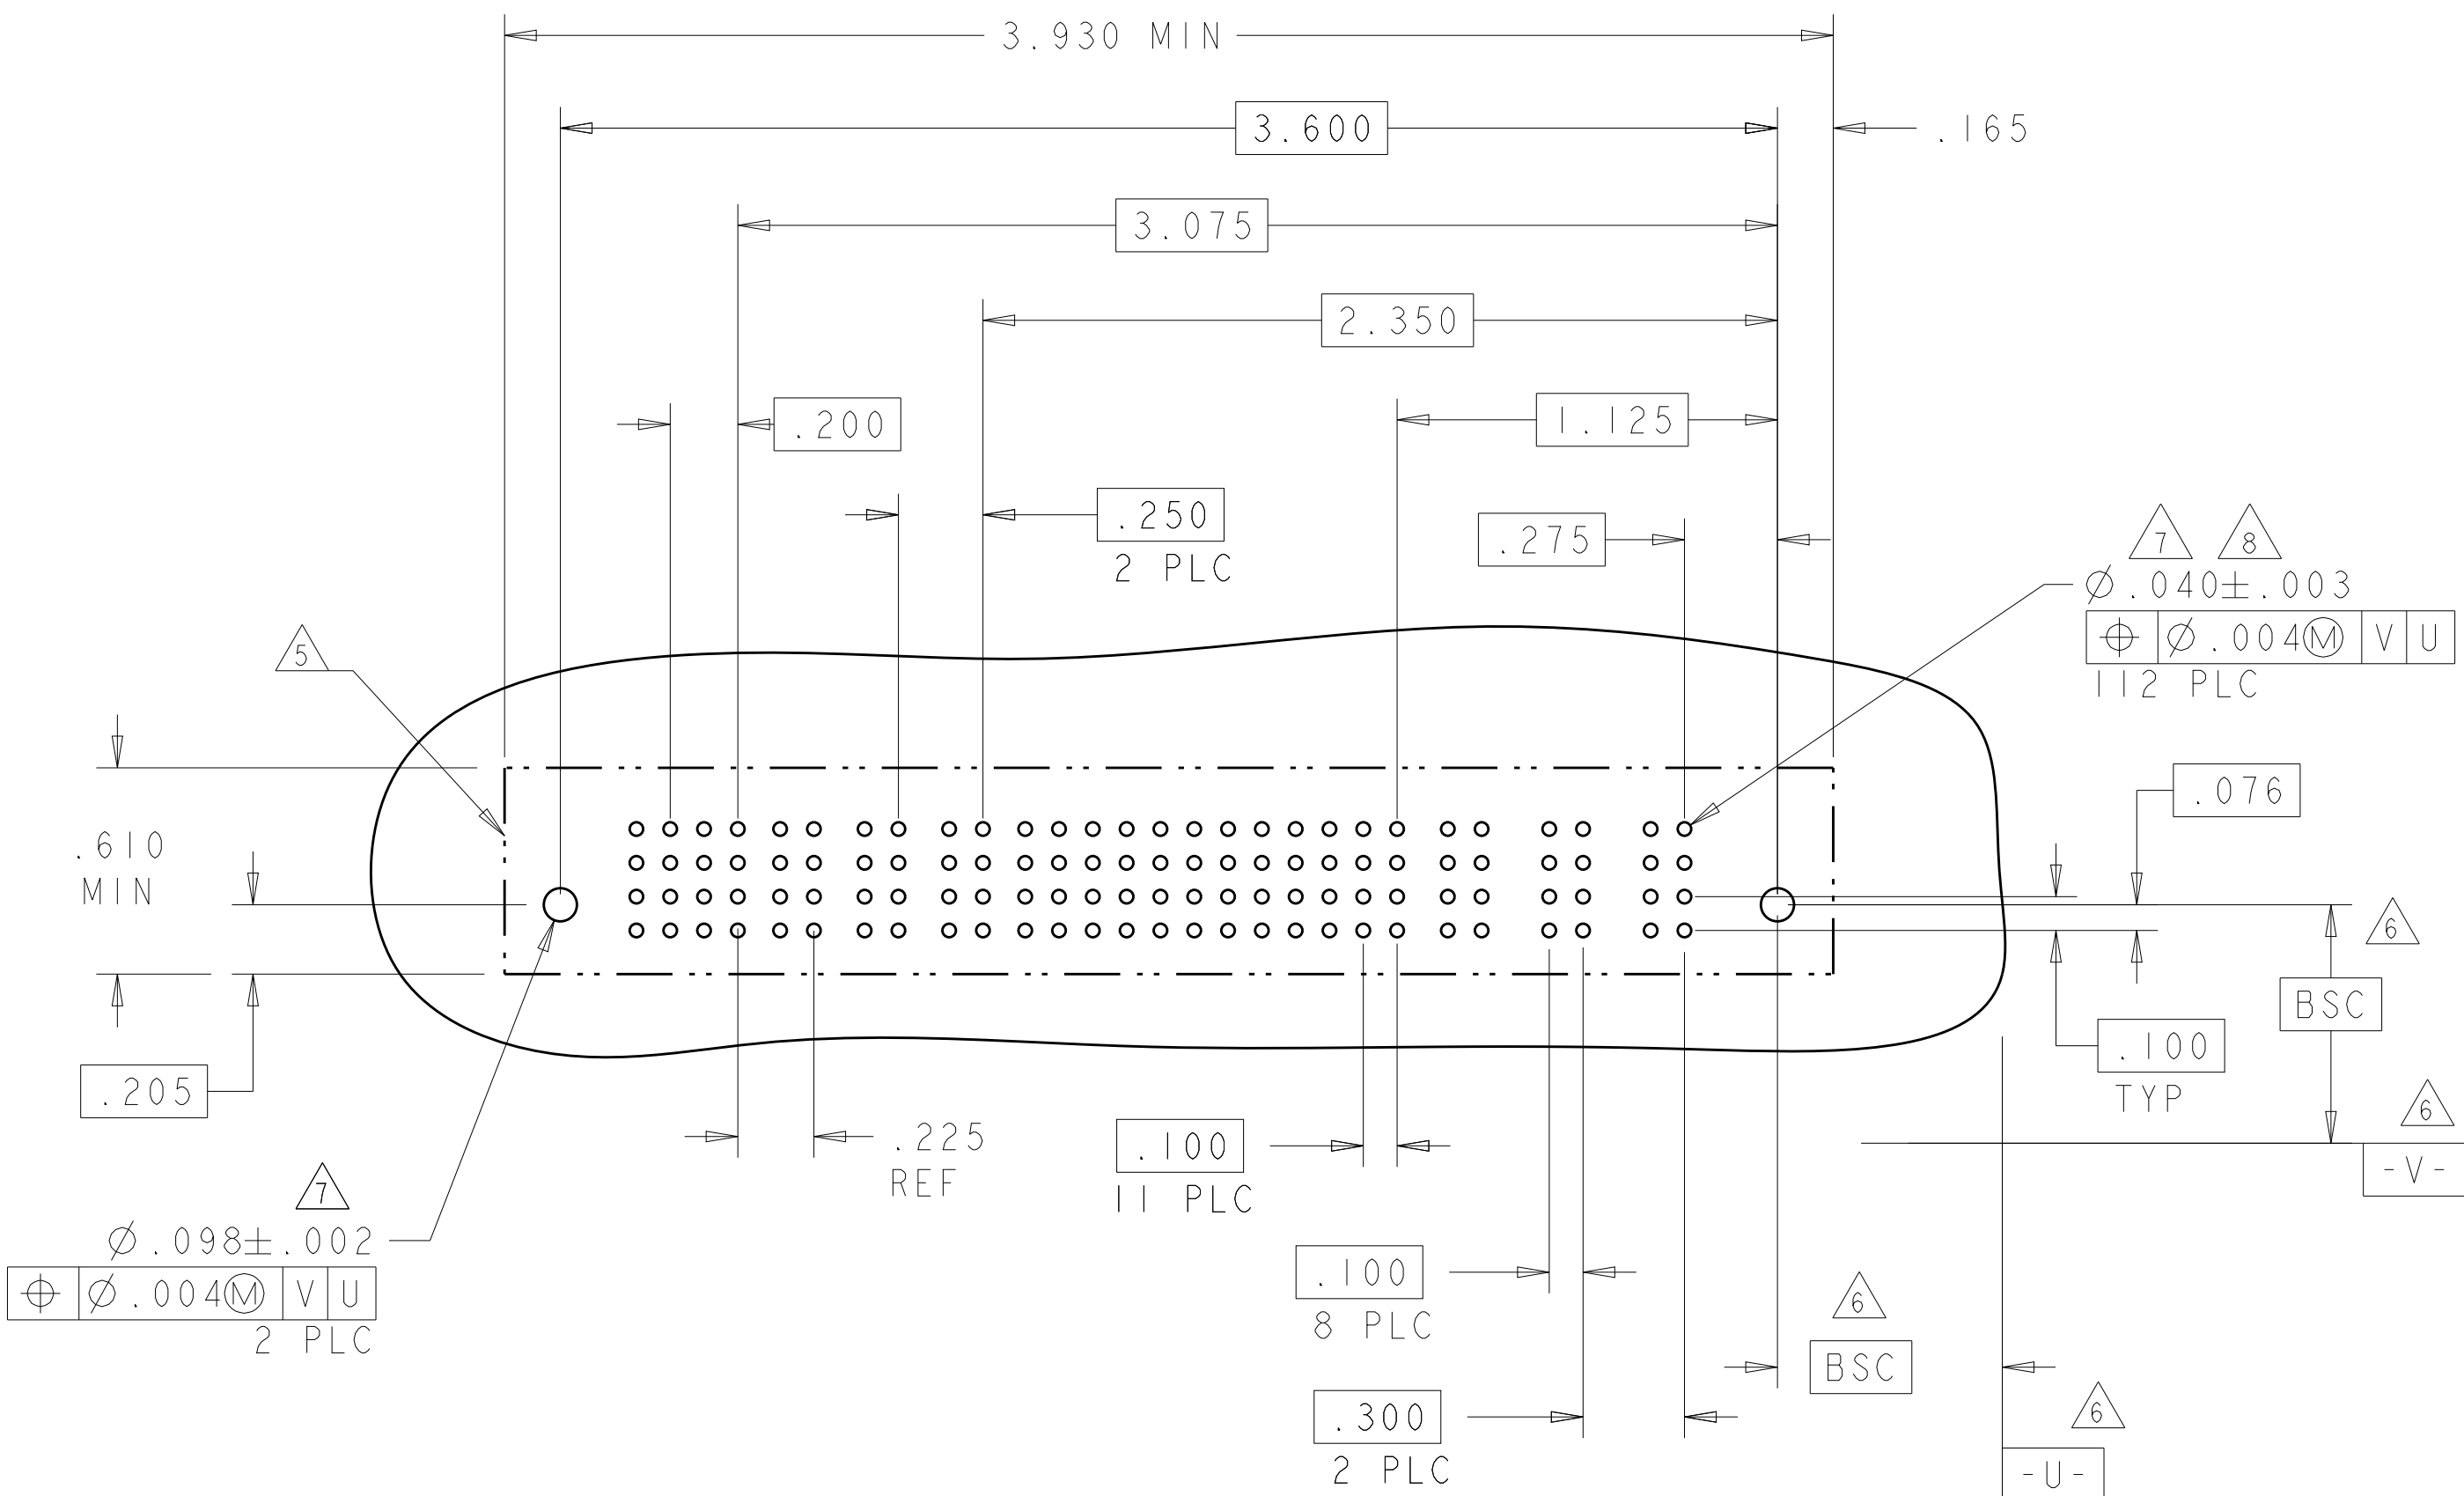
SCALE
1:1

SHEET
2

OF
12

REV
G5

4805 (3/11)

[illegible]


Technical drawing of a rectangular plate with a grid of holes. The drawing includes the following dimensions and tolerances:

- Overall width: 3.180 MIN
- Overall height: .610 MIN
- Top edge dimensions: 2.850, 1.875, 1.225, .165
- Left edge dimensions: .300 (2 PLC), .100 (7 PLC), .250
- Right edge dimensions: .076, .100 TYP, .250 (3 PLC), .100 (5 PLC)
- Bottom edge dimensions: .205, .250
- Central hole dimensions: $\phi .098 \pm .002$ (2 PLC), $\phi .040 \pm .003$ (80 PLC)
- Surface finish: .004 (V) U (2 PLC)
- Material: BSC
- Part number: 7
- HD (Hatched Detail)


VN	.090	STD		
VM	.135	STD		
VB	.090	MFB	J	.090
VA	.135	MFB	E	.135
CODE	TAIL LENGTH	DESCRIPTION	CODE	TAIL LENGTH
POWER CONTACTS			SIGNAL CONTACTS	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. GRZYBOWSKI 16FE005		TE Connectivity	
DIMENSIONS: INCHES		TOLERANCES, UNLESS OTHERWISE SPECIFIED:		TE	
		CWP M. PERCHERKE 16FE005		TE Connectivity	
		APPV M. PERCHERKE		NAME	
		PRODUCT SPEC 108-1973		VERTICAL RECEPTACLE ASSEMBLY WITH GUIDES MULTI-BEAM XL	
		APPLICATION SPEC 114-13038		SIZE CASE CODE, DRAWING NO	
MATERIAL		FINISH		WEIGHT	
-		-		A1 100779 C-6450150	
				CUSTOMER DRAWING	
				SCALE 1:1 SHEET 3 OF 12 REV G5	

PART NUMBER	ROWS		POWER (L)				SIGNAL								POWER (R)				
			P8	P7	P6	P5	6	5	4	3	2	1	P4	P3	P2	P1			
6450150-6	D C B A		VB	VN	VB	VN	J	J	J	J	J	J	J	J	VN	VB	VN	VB	
			J	J	J	J	J	J	J	J	J	J	J	J	J				
			J	J	J	J	J	J	J	J	J	J	J	J	J				
			J	J	J	J	J	J	J	J	J	J	J	J	J				
4P + 24S + 4P																			

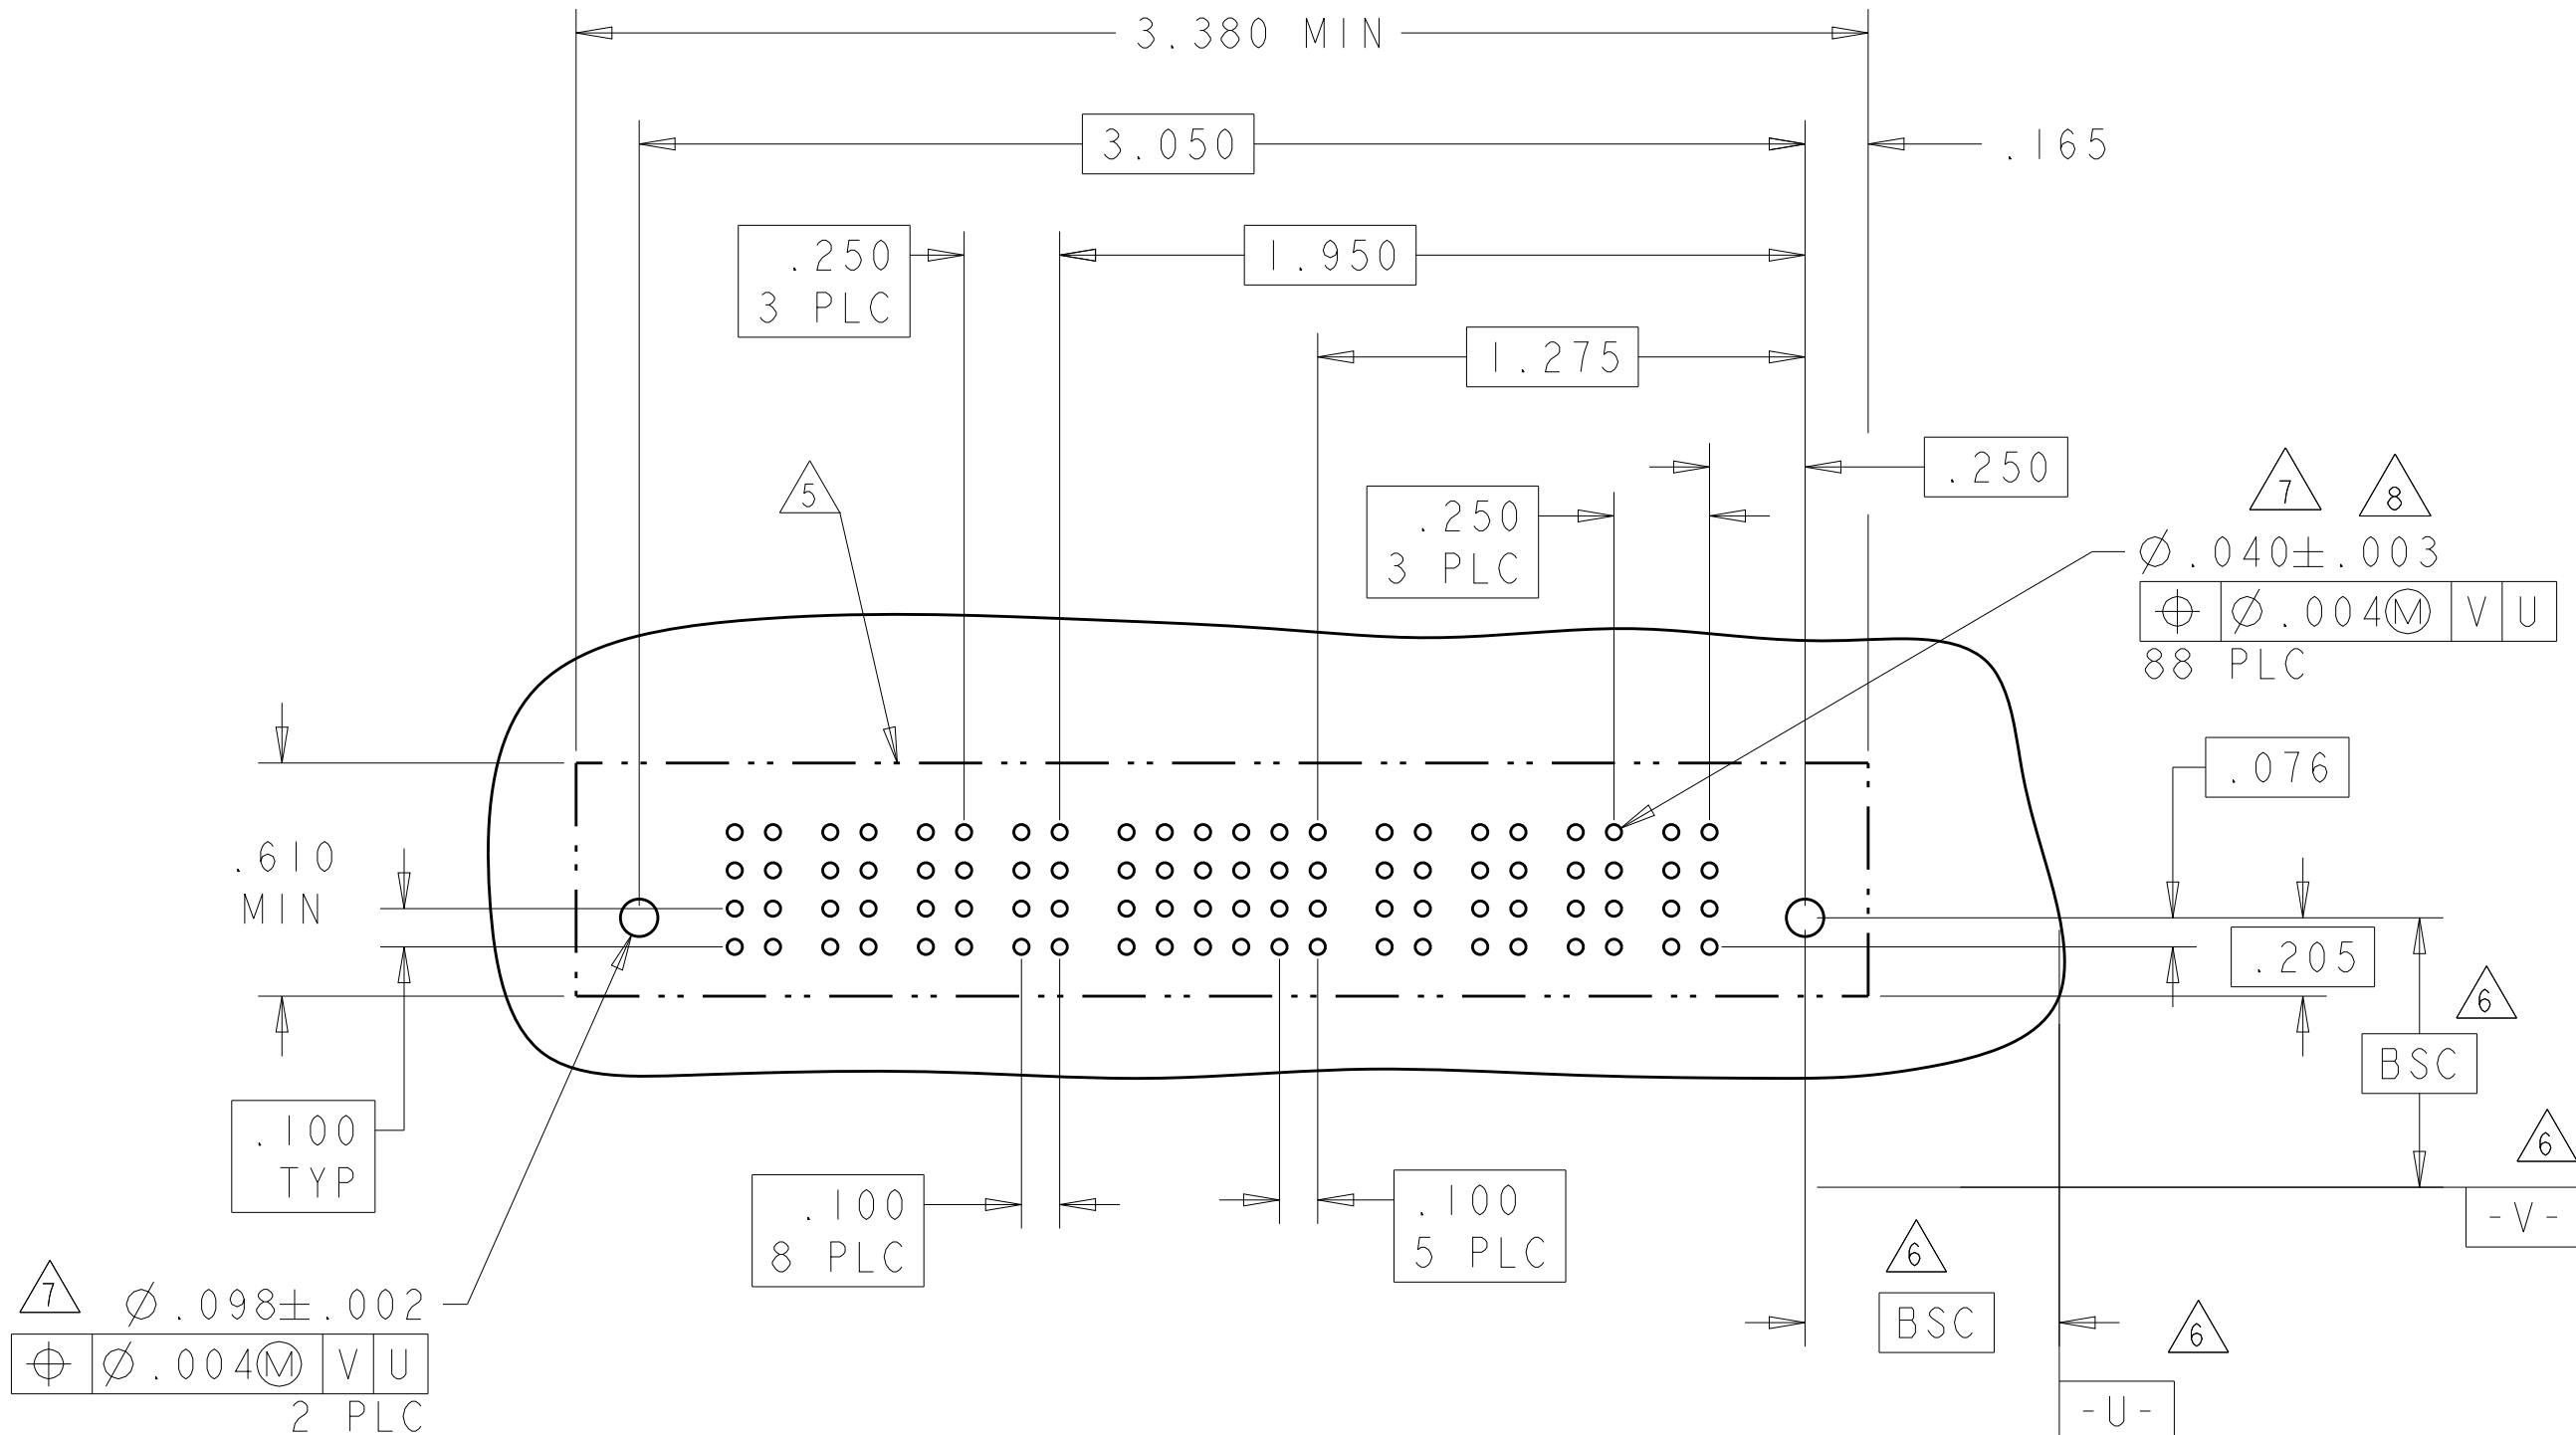


PART NUMBER	ROWS		POWER				SIGNAL				POWER			
			P2	6	5	4	3	2	1	P1				
6450150-8	D C B A			VM	E	E	E	E	E	E	E	E	VA	
					E	E	E	E	E	E	E	E		
					E	E	E	E	E	E	E	E		
					E	E	E	E	E	E	E	E		
														
IP + 24S + IP														

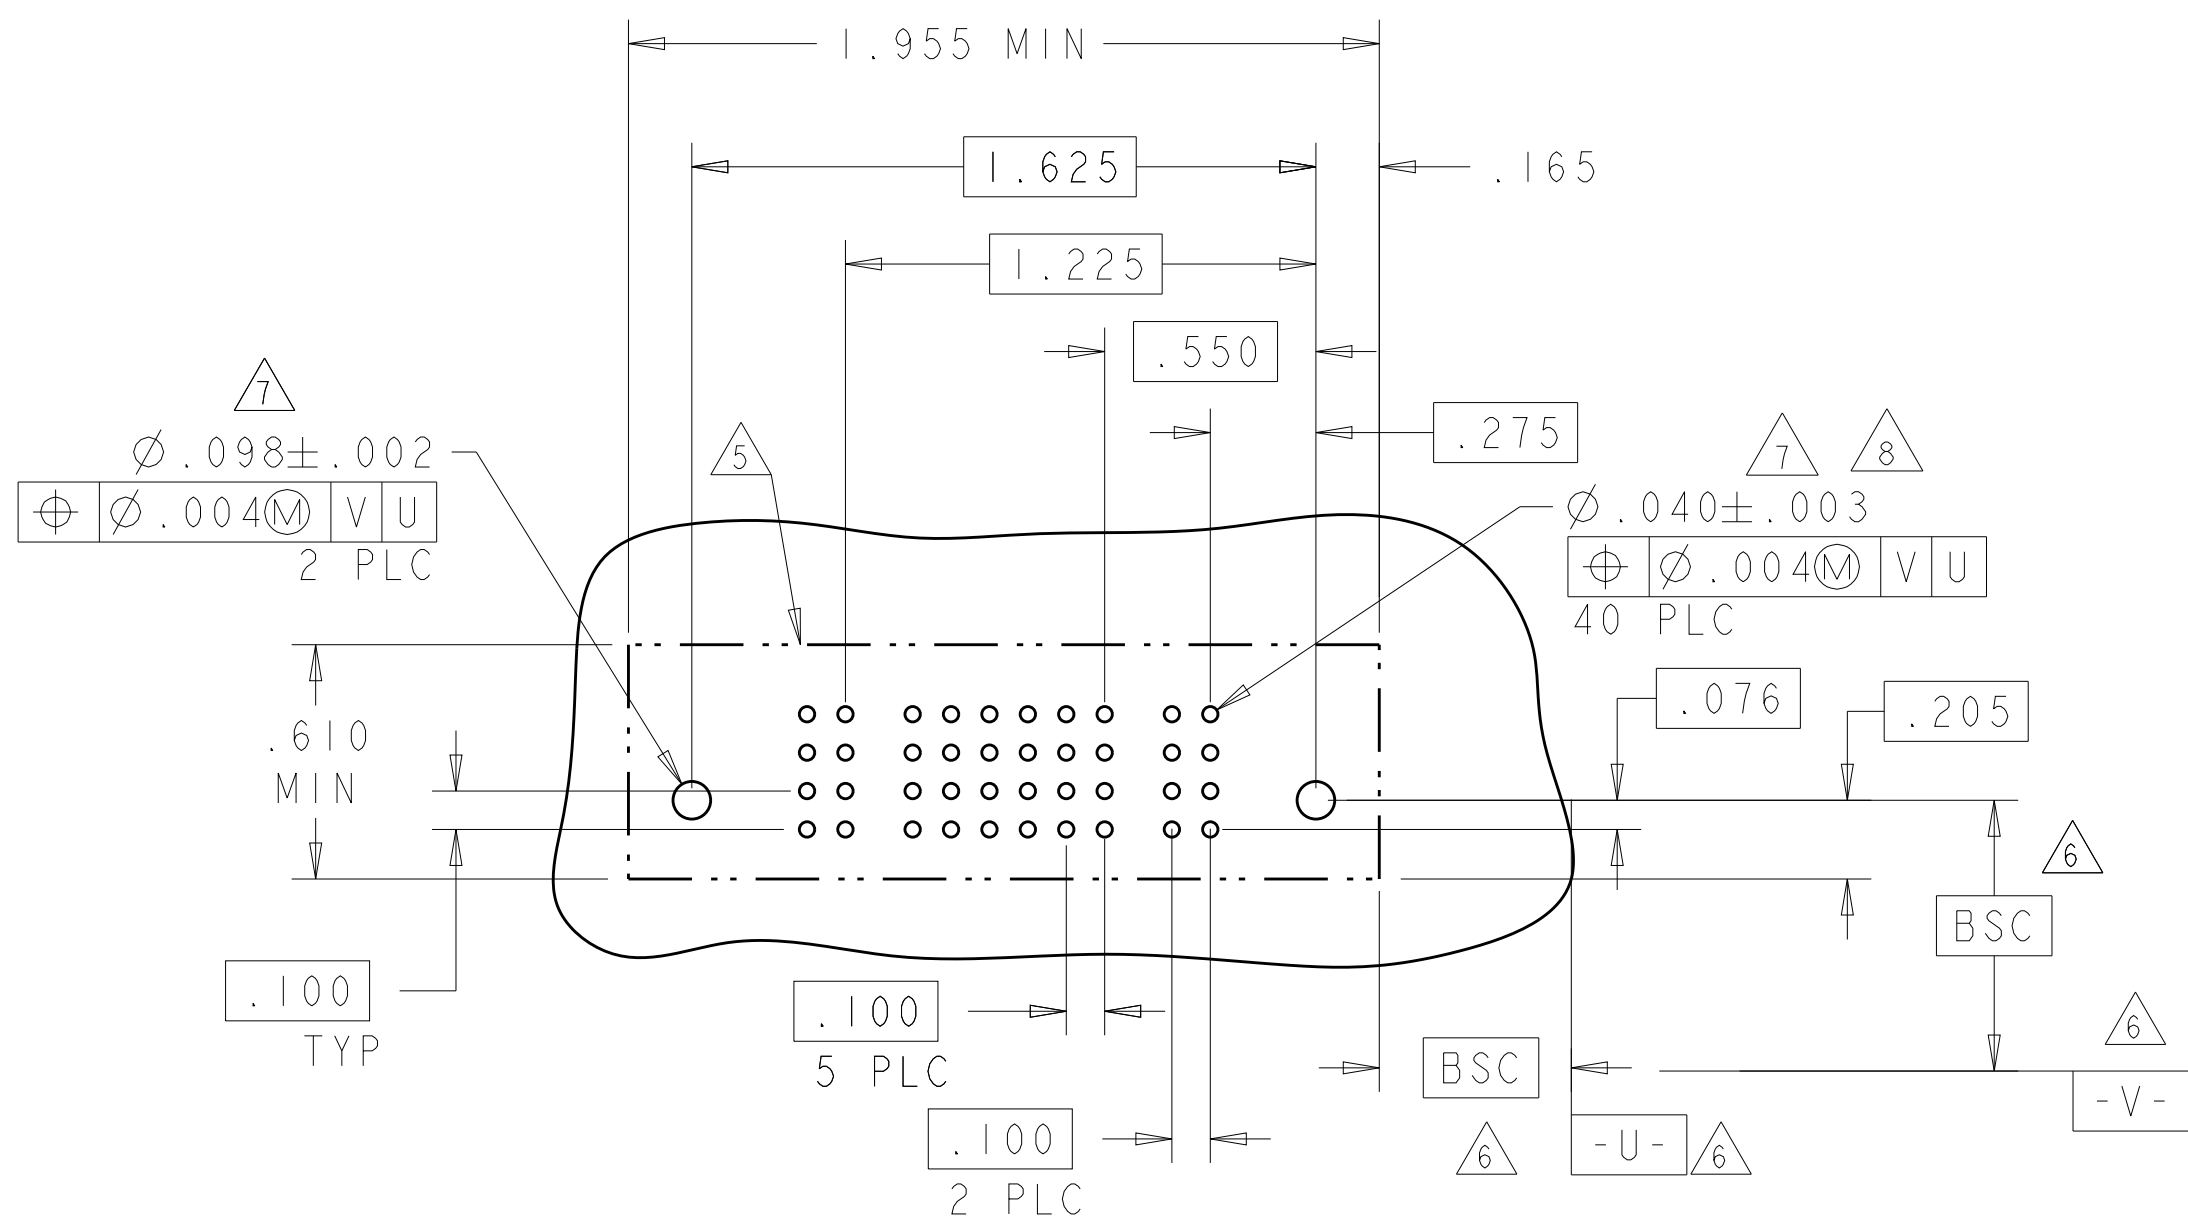
4805 (3/11)

LOC		DIST		REVISIONS				
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD	
		-		SEE SHEET 1	-	-	-	


PART NUMBER	ROWS		POWER (L)			SIGNAL				POWER																			
			P11	P10	P9	3	2	1	P8	P7	P6	P5	P4	P3		P2	P1												
1-6450150-3	D																												
8P + 12S + 3ACP																													

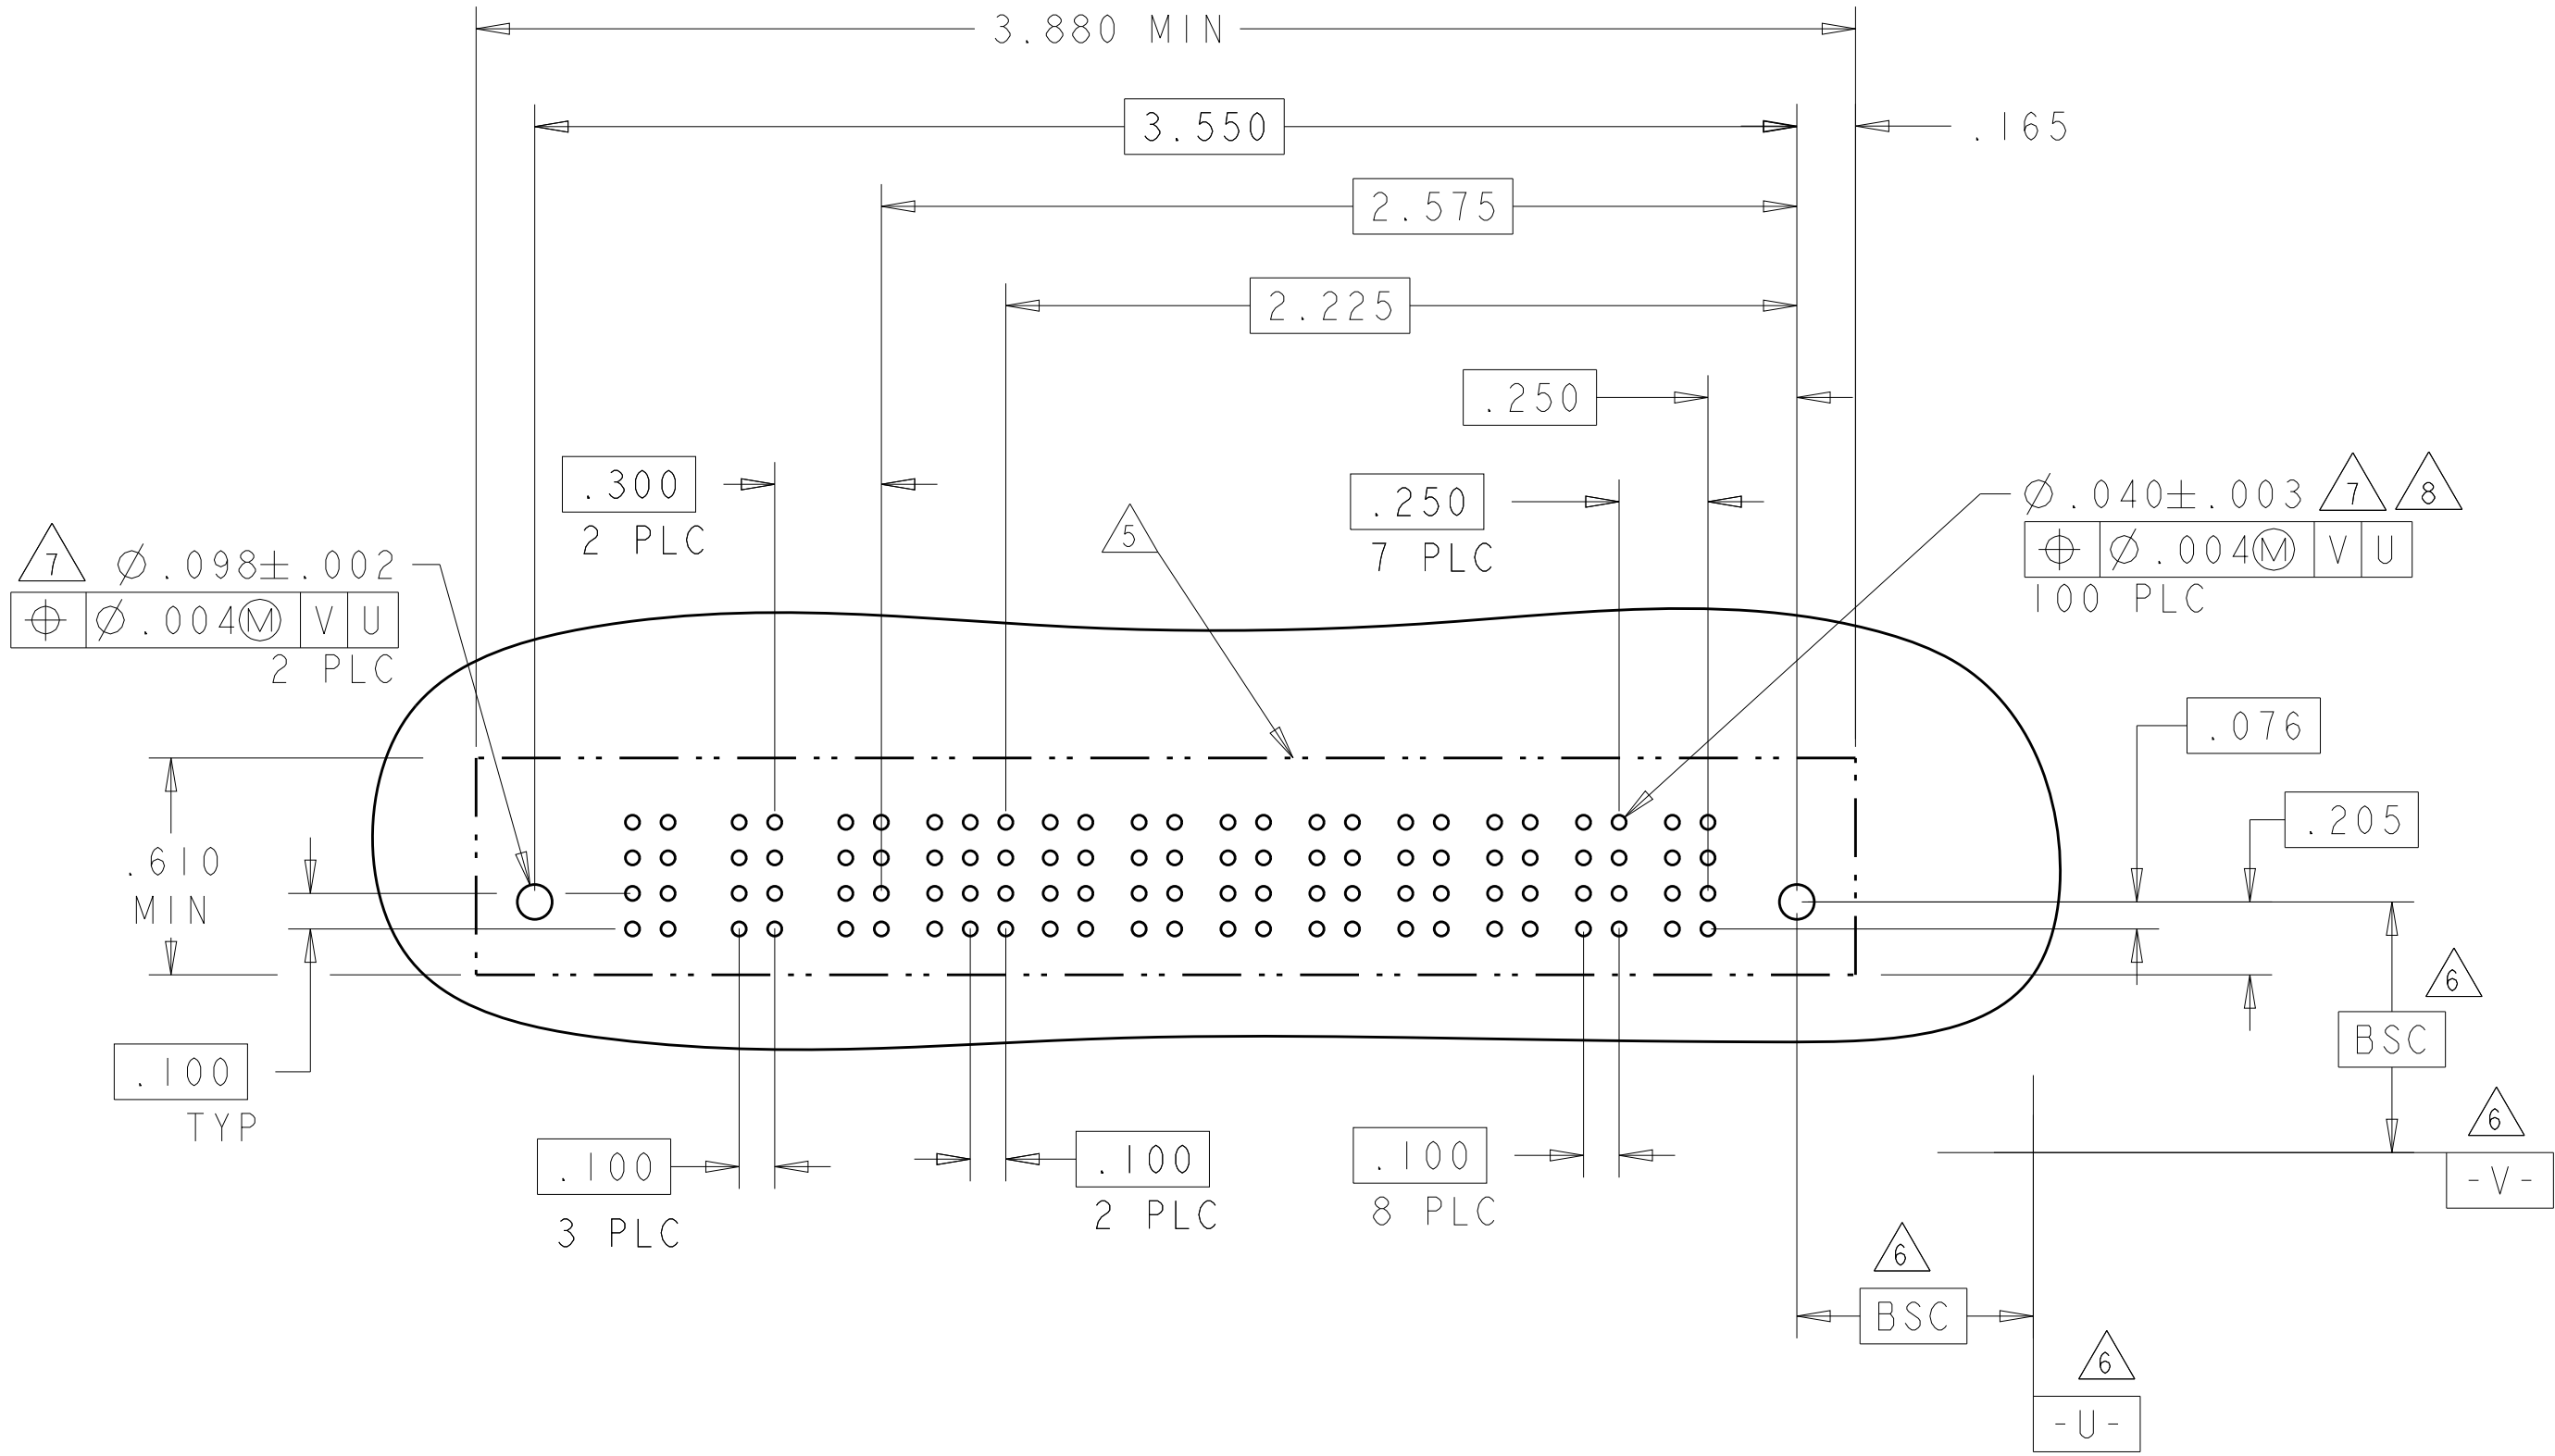

PART NUMBER	ROWS		POWER (L)					SIGNAL					POWER (R)			
			P8	P7	P6	P5	P4	5	4	3	2	1	P3	P2	P1	
1-6450150-8	D		VA	VA		VM	VA	E		E	E	E	VM		VM	
	E								E	E	E					
	E								E	E	E					
	E								E	E	E					
3P + 20S + 5P			NO CONTACTS LOUDED													

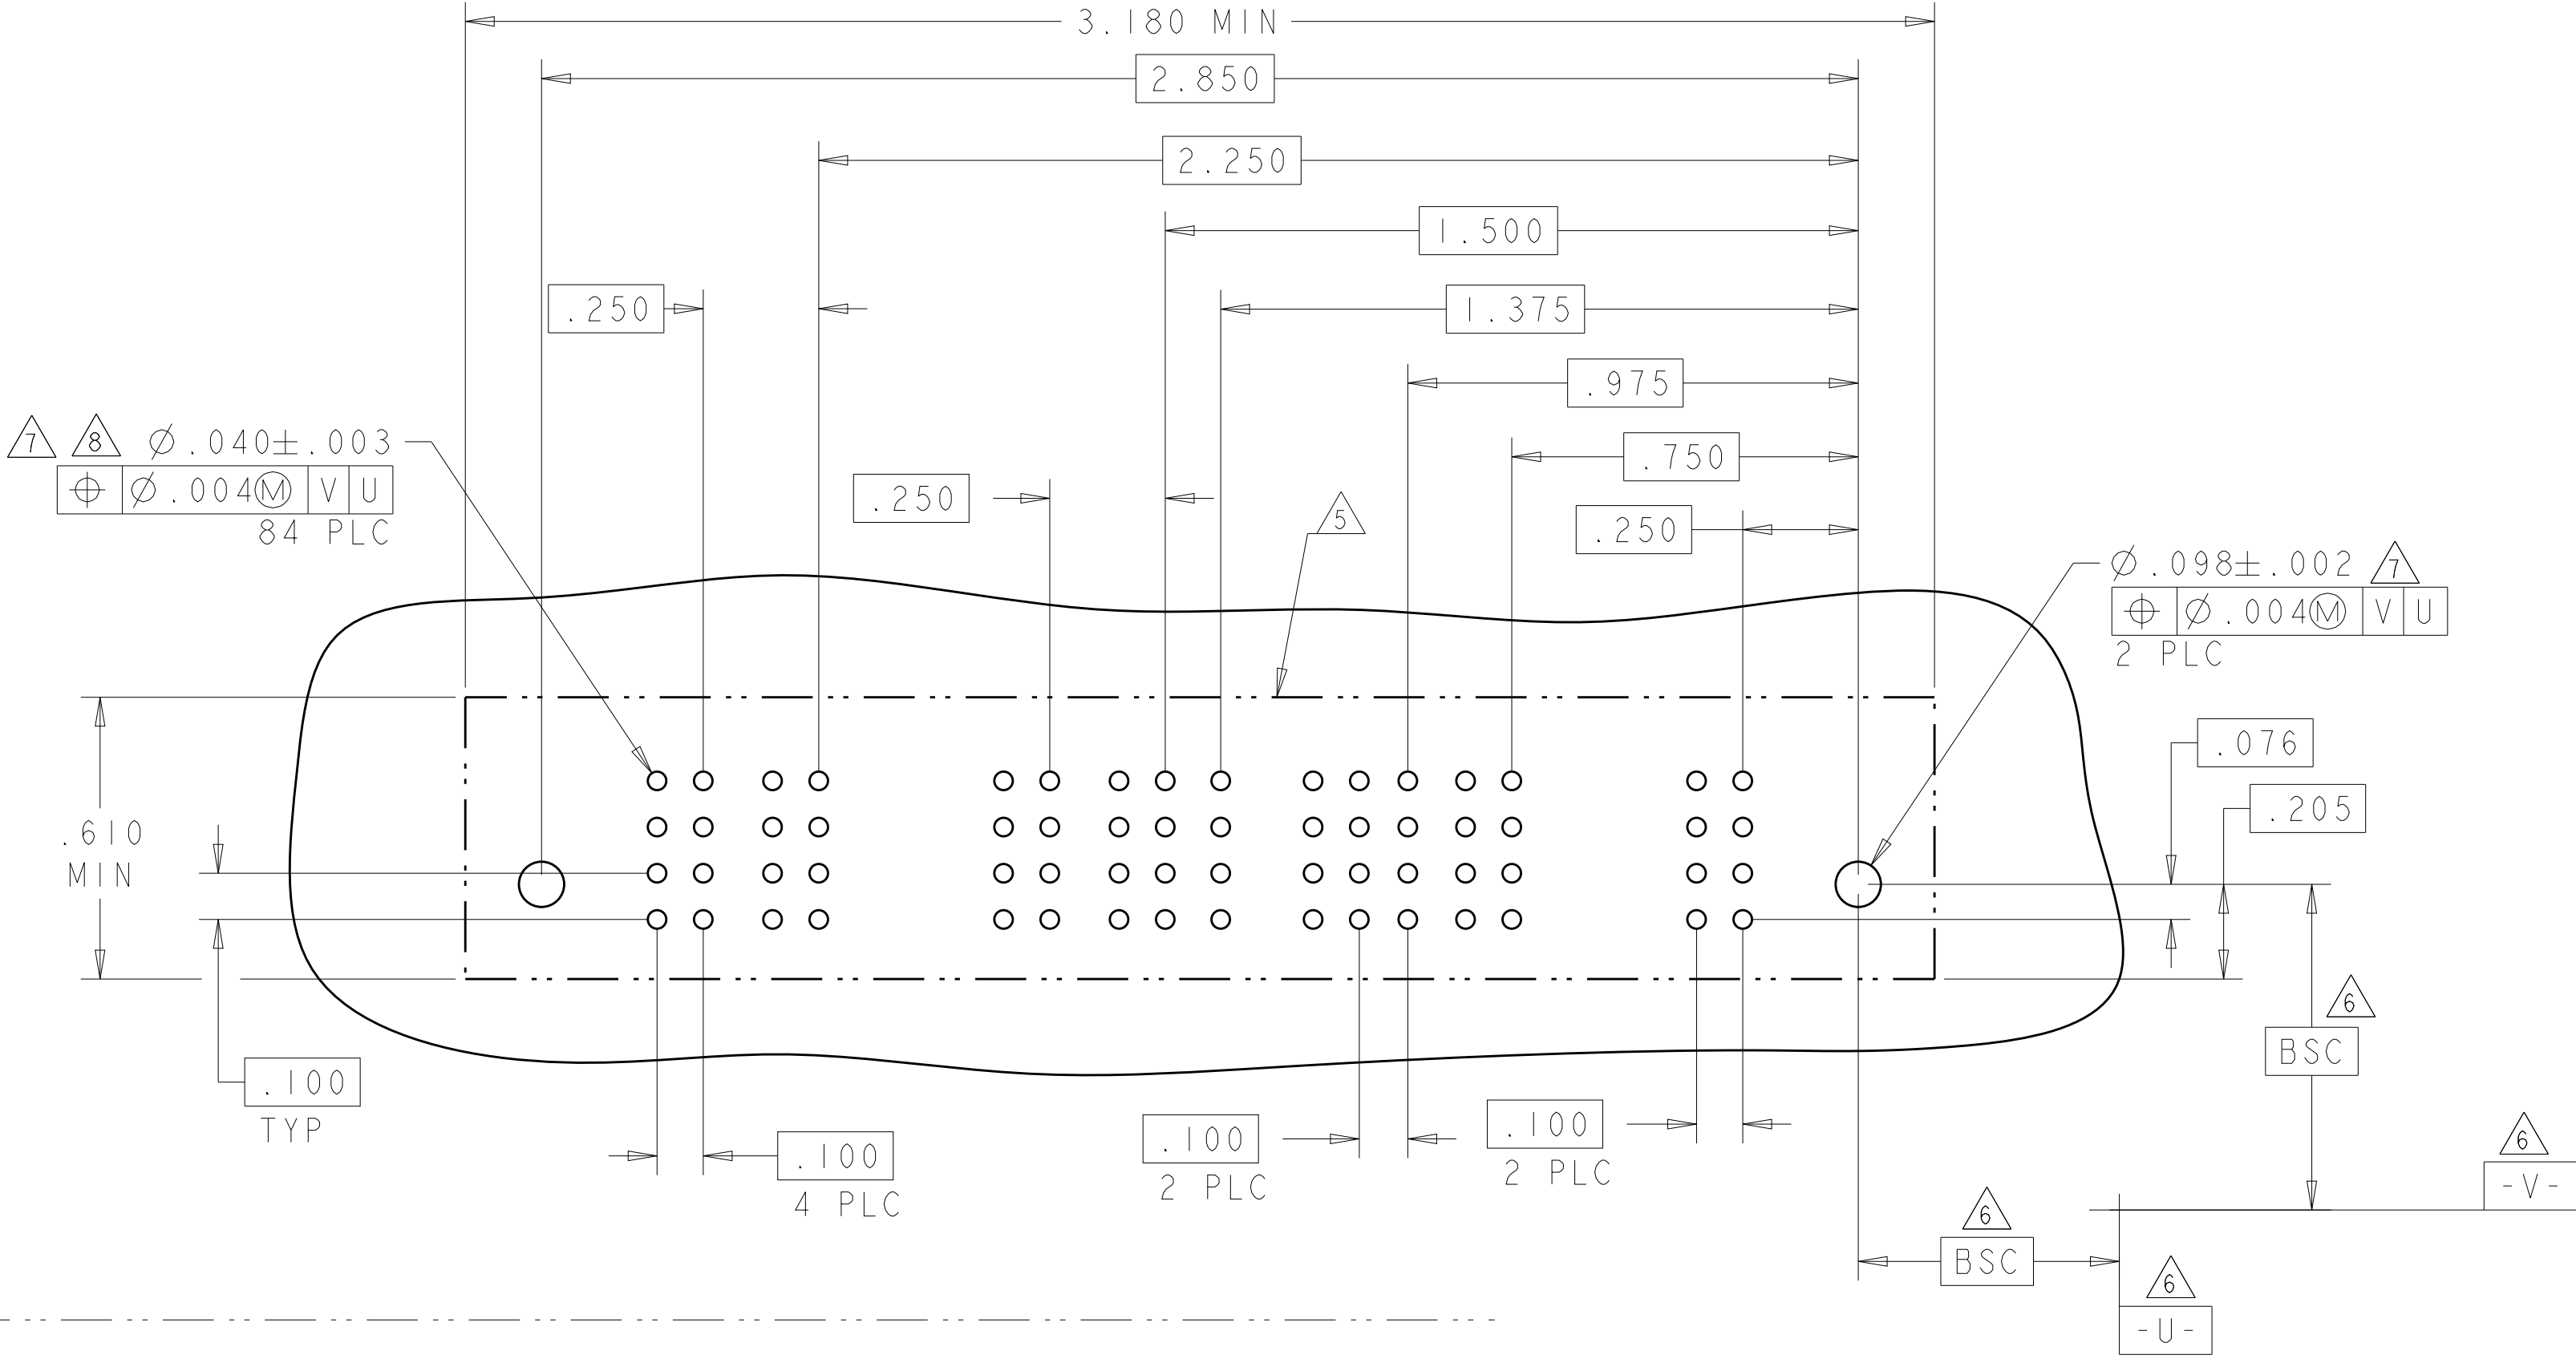

PART NUMBER	ROWS		SIGNAL																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
			37	36	35	34	33	32	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6		5	4	3	2	1																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
1-6450150-9	D		E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E

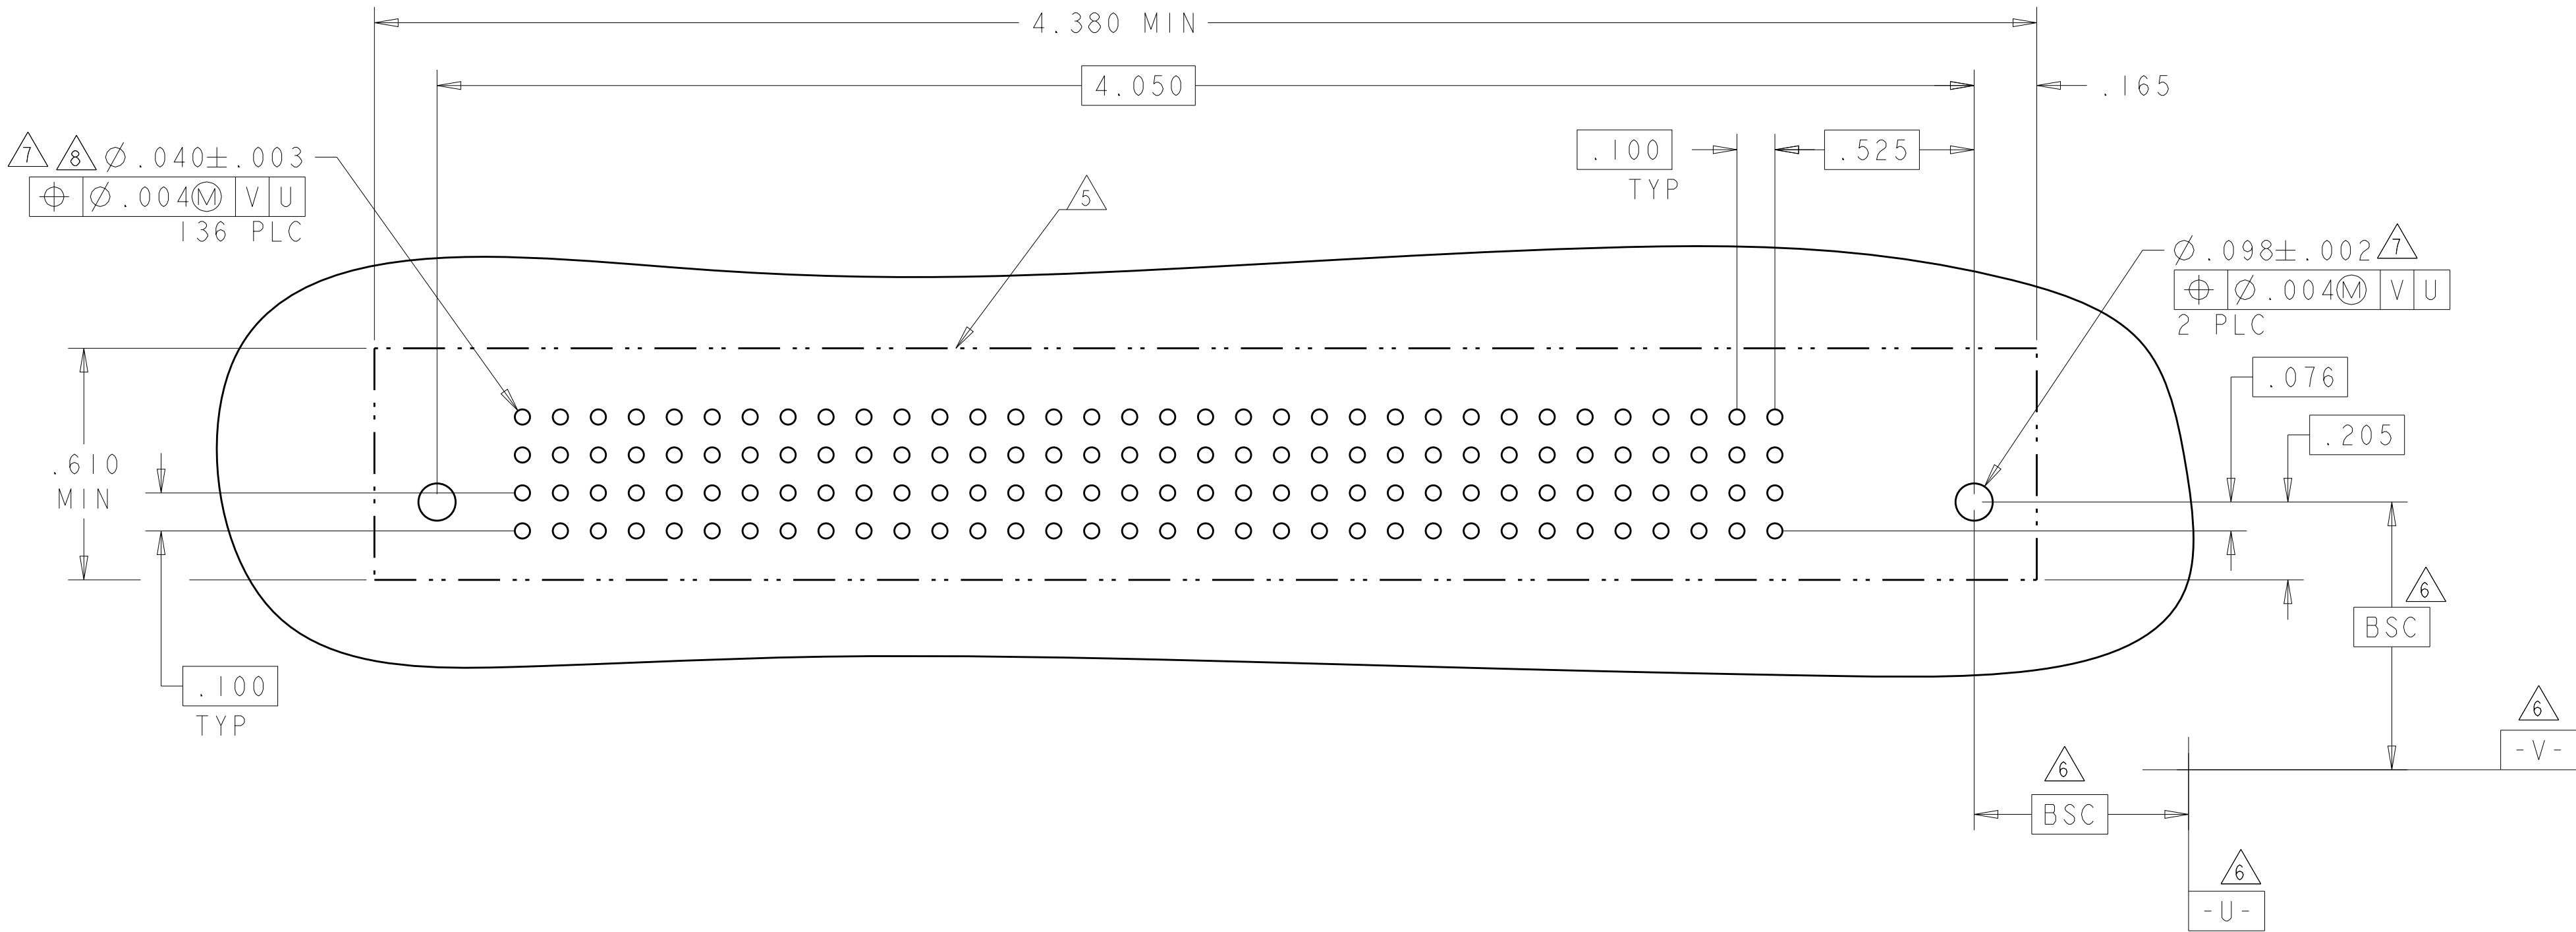

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN: R. GRZYBOWSKI 16FEB05
CHK: M. PERCHERKE 16FEB05
APVD: M. PERCHERKE

PRODUCT SPEC: 108-1973
APPLICATION SPEC: 114-13038
WEIGHT: -
CUSTOMER DRAWING

DIMENSIONS: INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±.
1 PLC ±.01
2 PLC ±.01
3 PLC ±.005
4 PLC ±.0020
ANGLES #2°
FINISH -

NAME: VERTICAL RECEPTACLE ASSEMBLY WITH GUIDES MULTI-BEAM XL

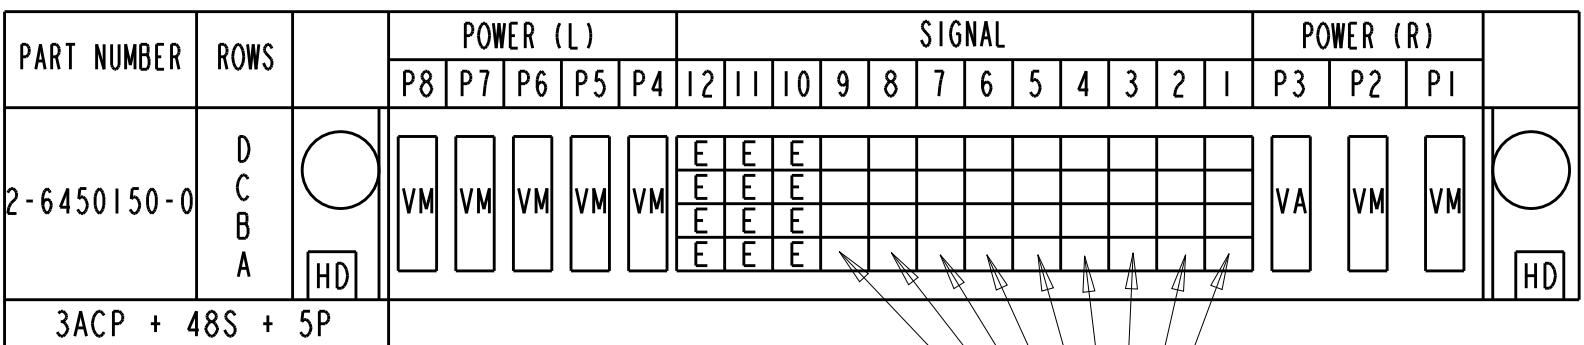
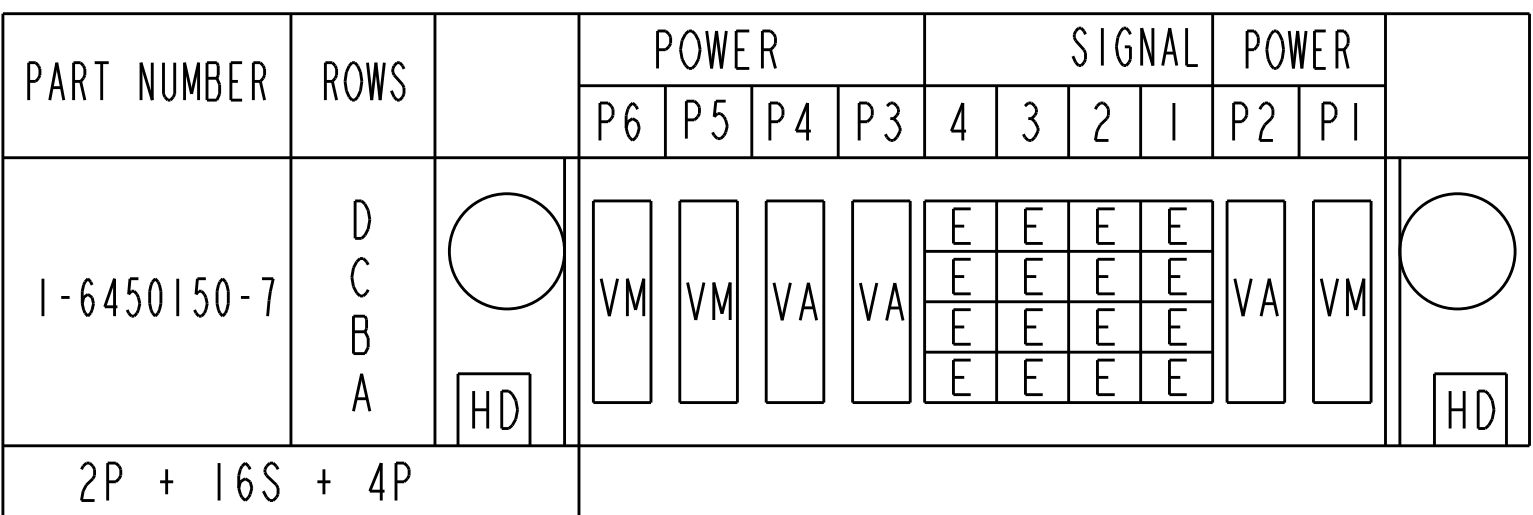
SIZE: A1
CAGE CODE: 00779
DRAWING NO: C=6450150


RESTRICTED TO: -
















SCALE: 1:1

SHEET: 5 OF 12


REV: G5




THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN. GRZYBOWSKI 16FEB05 CHK. M. PERCHERKE 16FEB05 APP. M. PERCHERKE REV.		 TE Connectivity	
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED: DECIMALS: ±. FRACTIONS: ±. ANGLES: ±°		NAME VERTICAL RECTANGLE ASSEMBLY WITH GUIDES MULTI-BEAM XL	
		PRODUCT SPEC 108-1973 APPLICATION SPEC 114-13038		SIZE CAGE CODE DRAWING NO A100779C6450150	
MATERIAL -		WEIGHT -		RESTRICTED TO -	
FINISH -		CUSTOMER DRAWING		SCALE 1:1 SHEET 6 OF 12 REV G5	

PART NUMBER	ROWS		POWER		SIGNAL						POWER																																																																				
			P5	P4	6	5	4	3	2	1	P3	P2	P1																																																																		
6450150-9	D C B A	    HD	   	   	   	   	   	   	   	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	 	



PART NUMBER	ROWS		POWER		SIGNAL							POWER			
			P5	P4	6	5	4	3	2	1	P3	P2	P1		
2-6450150-8	D C B A	 	 		  	 									
3ACP+24S+2P															

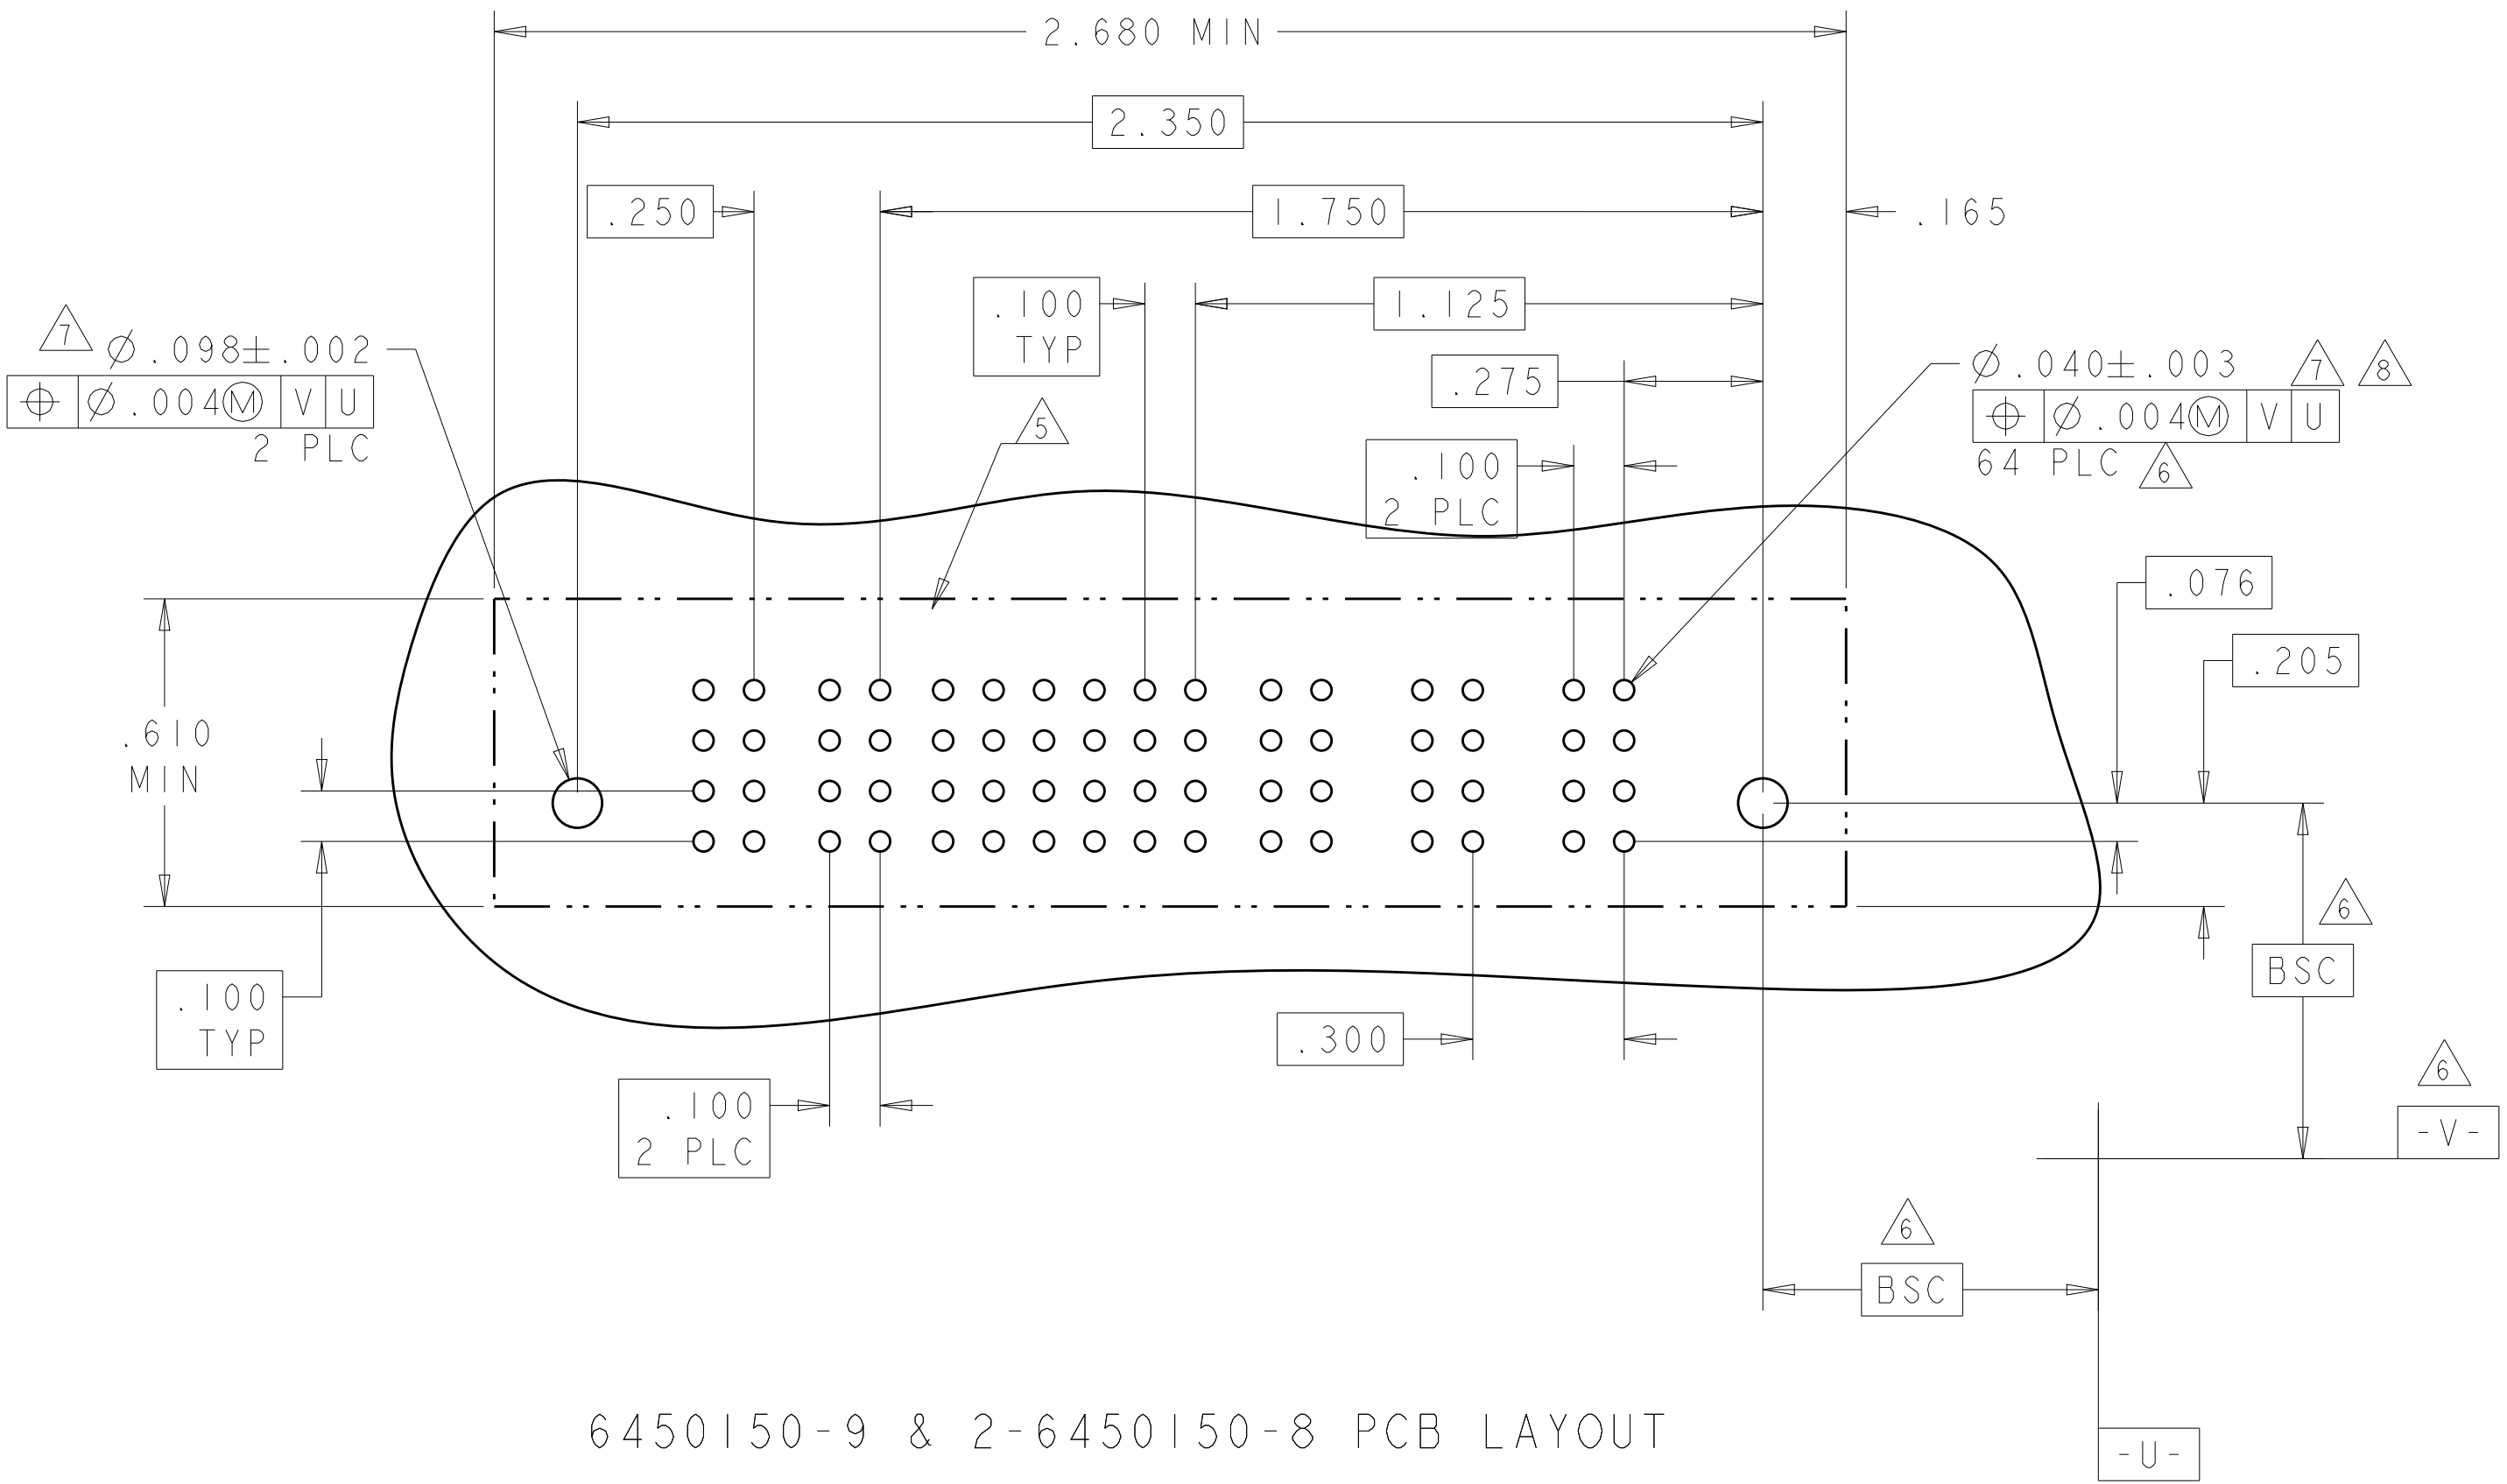

6450150-9 & 2-6450150-8 PCB LAYOUT

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN - R. GRZYBOWSKI 16FEB05		 TE Connectivity	
		CHW - M. PERCHERKE 16FEB05			
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
		1 PLC ±		M. PERCHERKE	
		1 PLC ±		APVD -	
		2 PLC ±.01		PRODUCT SPEC	
		3 PLC ±.005		108-1973	
4 PLC ±.0020		APPLICATION SPEC		VERTICAL RECEPTACLE ASSEMBLY WITH GUIDES MULTI-BEAM XL	
ANGLES ±°		114-13038		SIZE CASE CODE DRAWING NO	
FINISH		WEIGHT -		A 100779 ©=6450150	
MATERIAL				RESTRICTED TO	
				-	
				SCALE 1:1 SHEET 7 OF 12 REV G5	
		CUSTOMER DRAWING			

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-	-	SEE SHEET 1	-	-	-

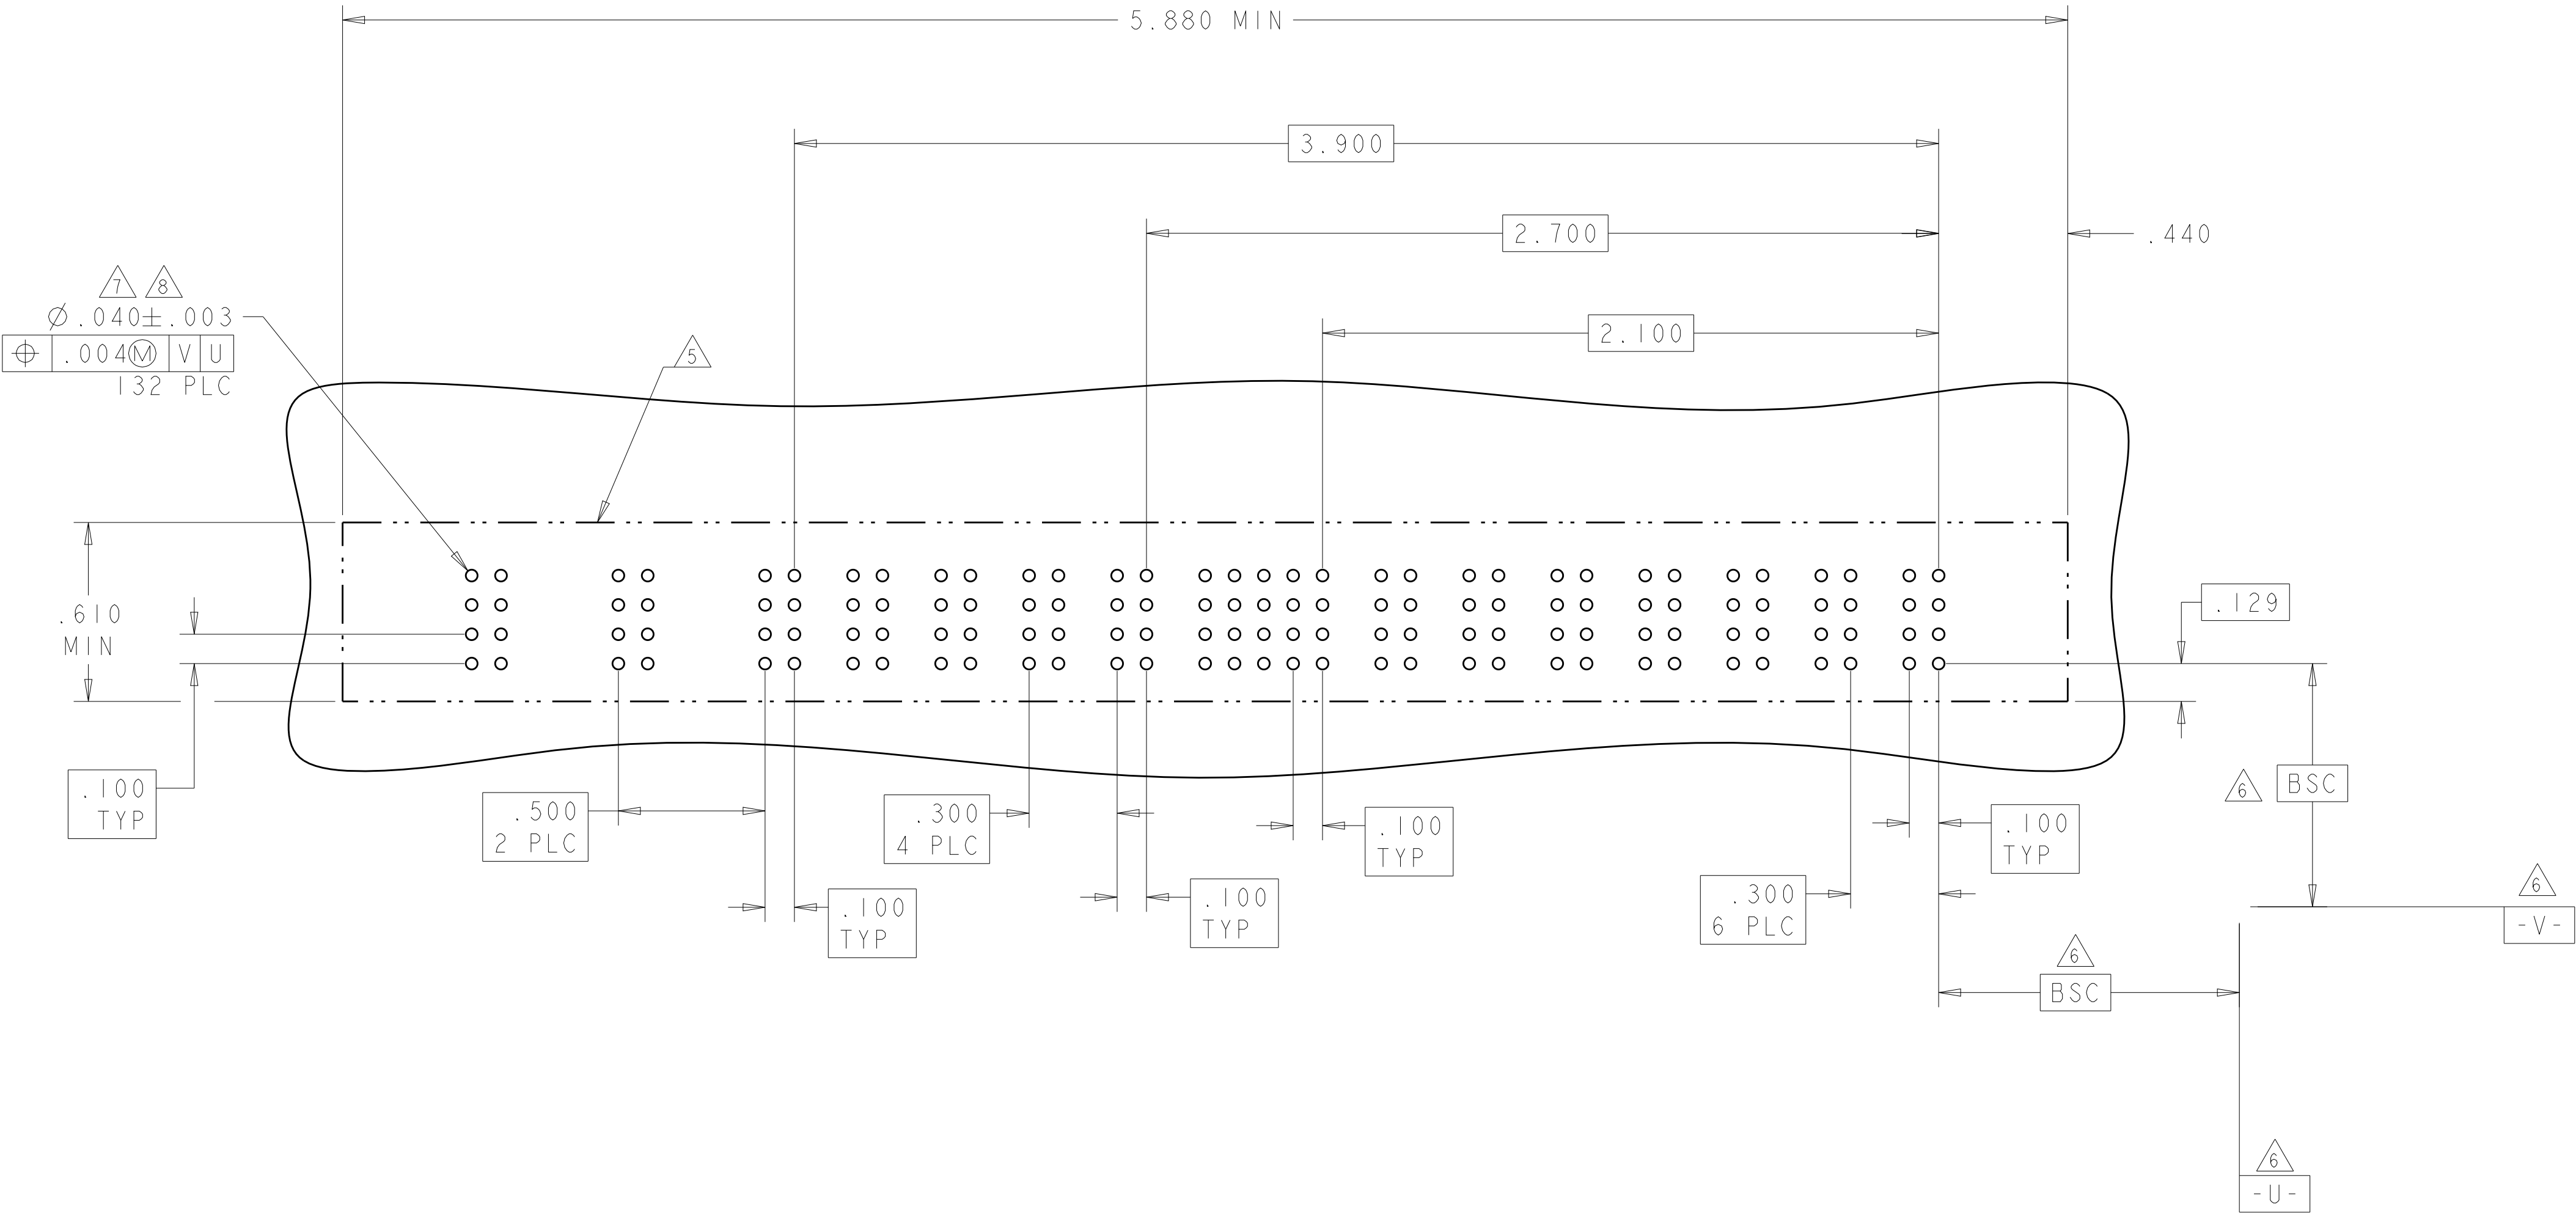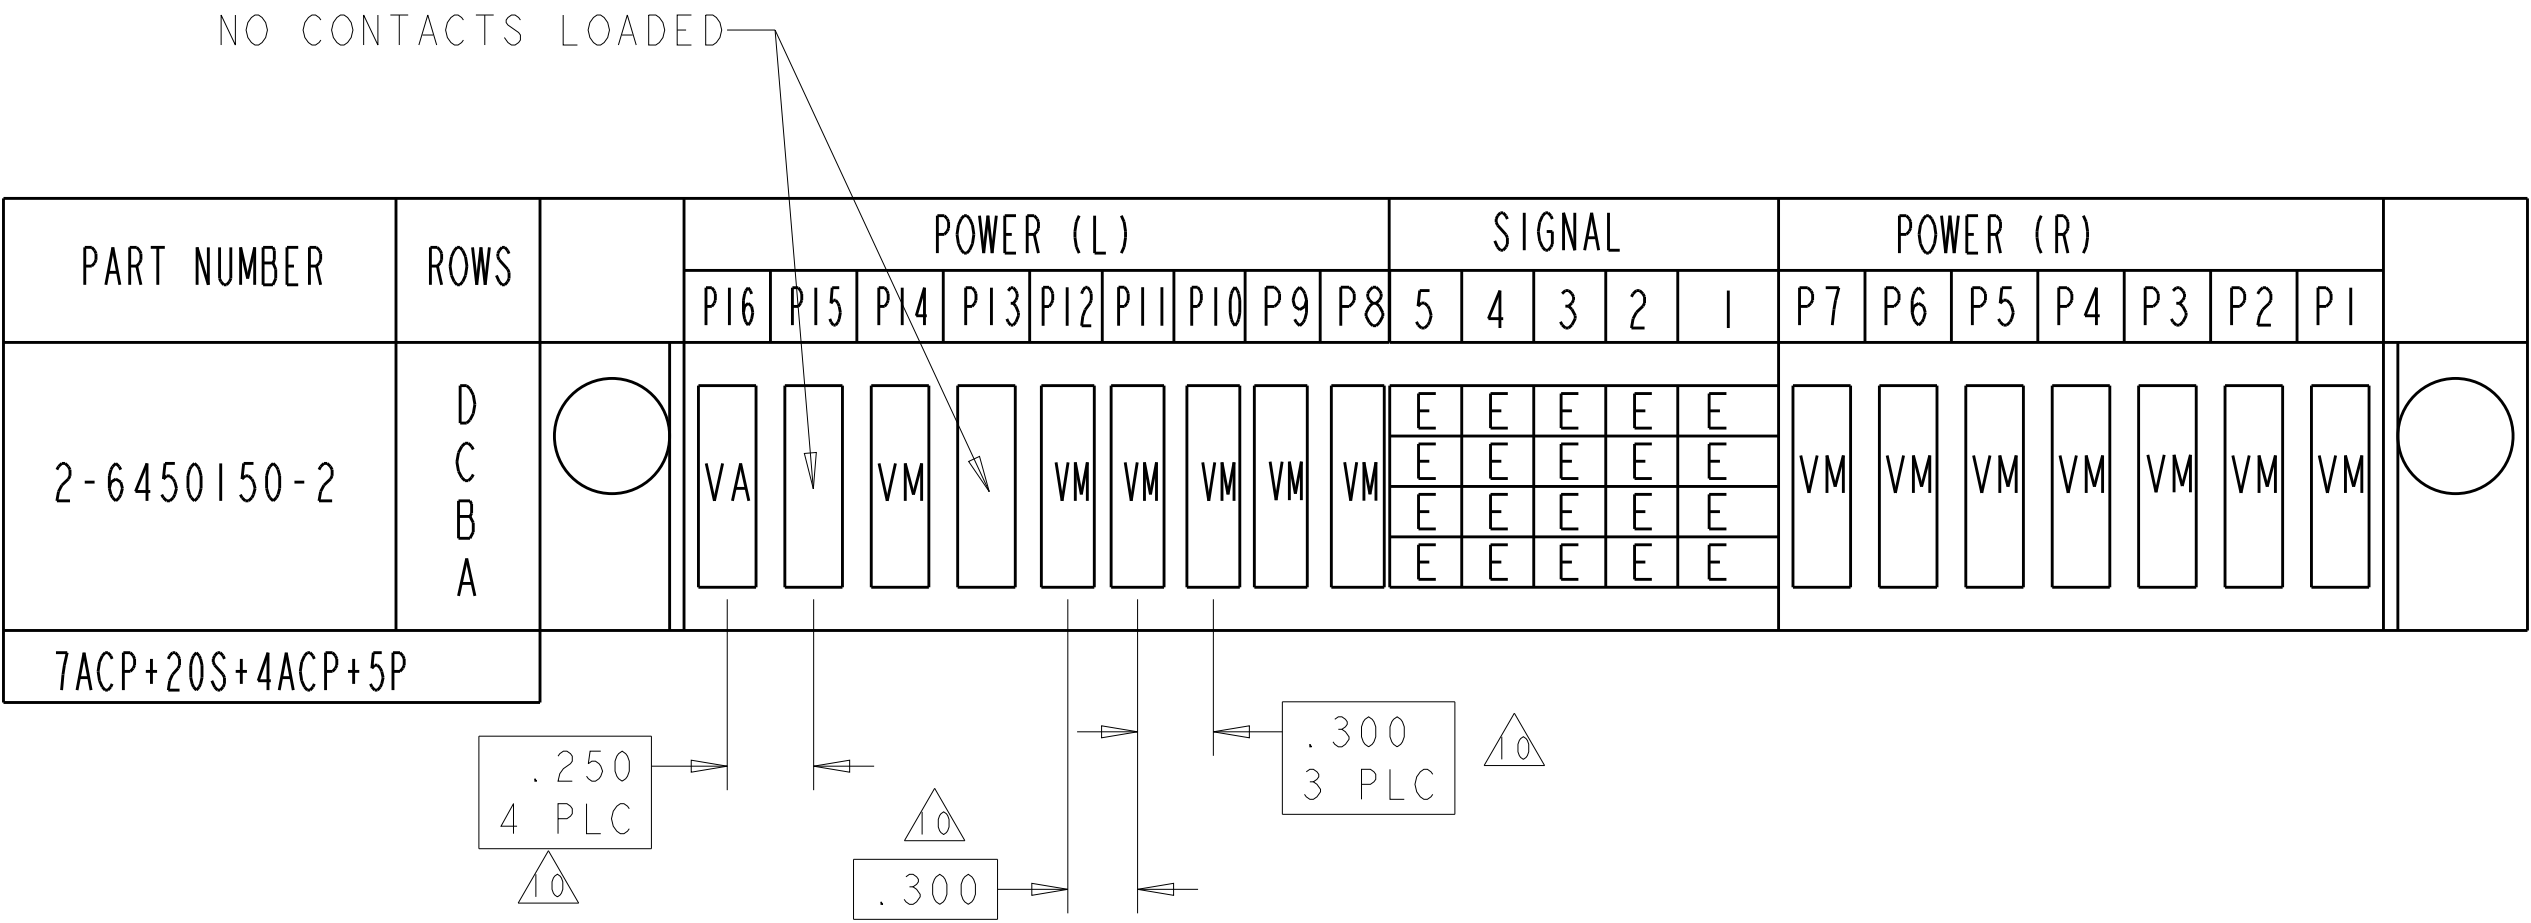

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
INCHES

MATERIAL

-

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC ±"

1 PLC ±.01

2 PLC ±.01

3 PLC ±.005

4 PLC ±.0020

ANGLES ±2°

FINISH

-

DWN
R.GRZYBOWSKI
CHK
M.PERCHEKKE
APVD
M.PERCHEKKE

16FEB05
16FEB05
-

PRODUCT SPEC
108-1973
APPLICATION SPEC
114-13038
WEIGHT
-

CUSTOMER DRAWING

NAME

VERTICAL RECEPTACLE ASSEMBLY
WITH GUIDES
MULTI-BEAM XL

SIZE
A1

CAGE CODE
00779

DRAWING NO
C=6450150

RESTRICTED TO
-

SCALE
1:1

SHEET
8

OF
12

REV
G5



TE Connectivity

TE

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-	-	SEE SHEET 1	-	-	-


PART NUMBER	ROWS		POWER		SIGNAL					POWER		
			P4	P3	4	3	2	1	P2	P1		
2-6450150-3	D C B A				E	E	E	E	E			
					E	E	E	E	E			
					E	E	E	E	E			
					E	E	E	E	E			
2P + 16S + 2P												

PART NUMBER	ROWS		POWER		SIGNAL												POWER		
			P4	P3	12	11	10	9	8	7	6	5	4	3	2	1	P2	P1	
2-6450150-4	D		VM	VA	E	E	E	E	E	E	E	E	E	E	E	E	VA	VM	
	C				E	E	E	E	E	E	E	E	E	E	E	E			
	B				E	E	E	E	E	E	E	E	E	E	E	E			
	A	HD			E	E	E	E	E	E	E	E	E	E	E	E			HD
2P + 48S + 2P																			









































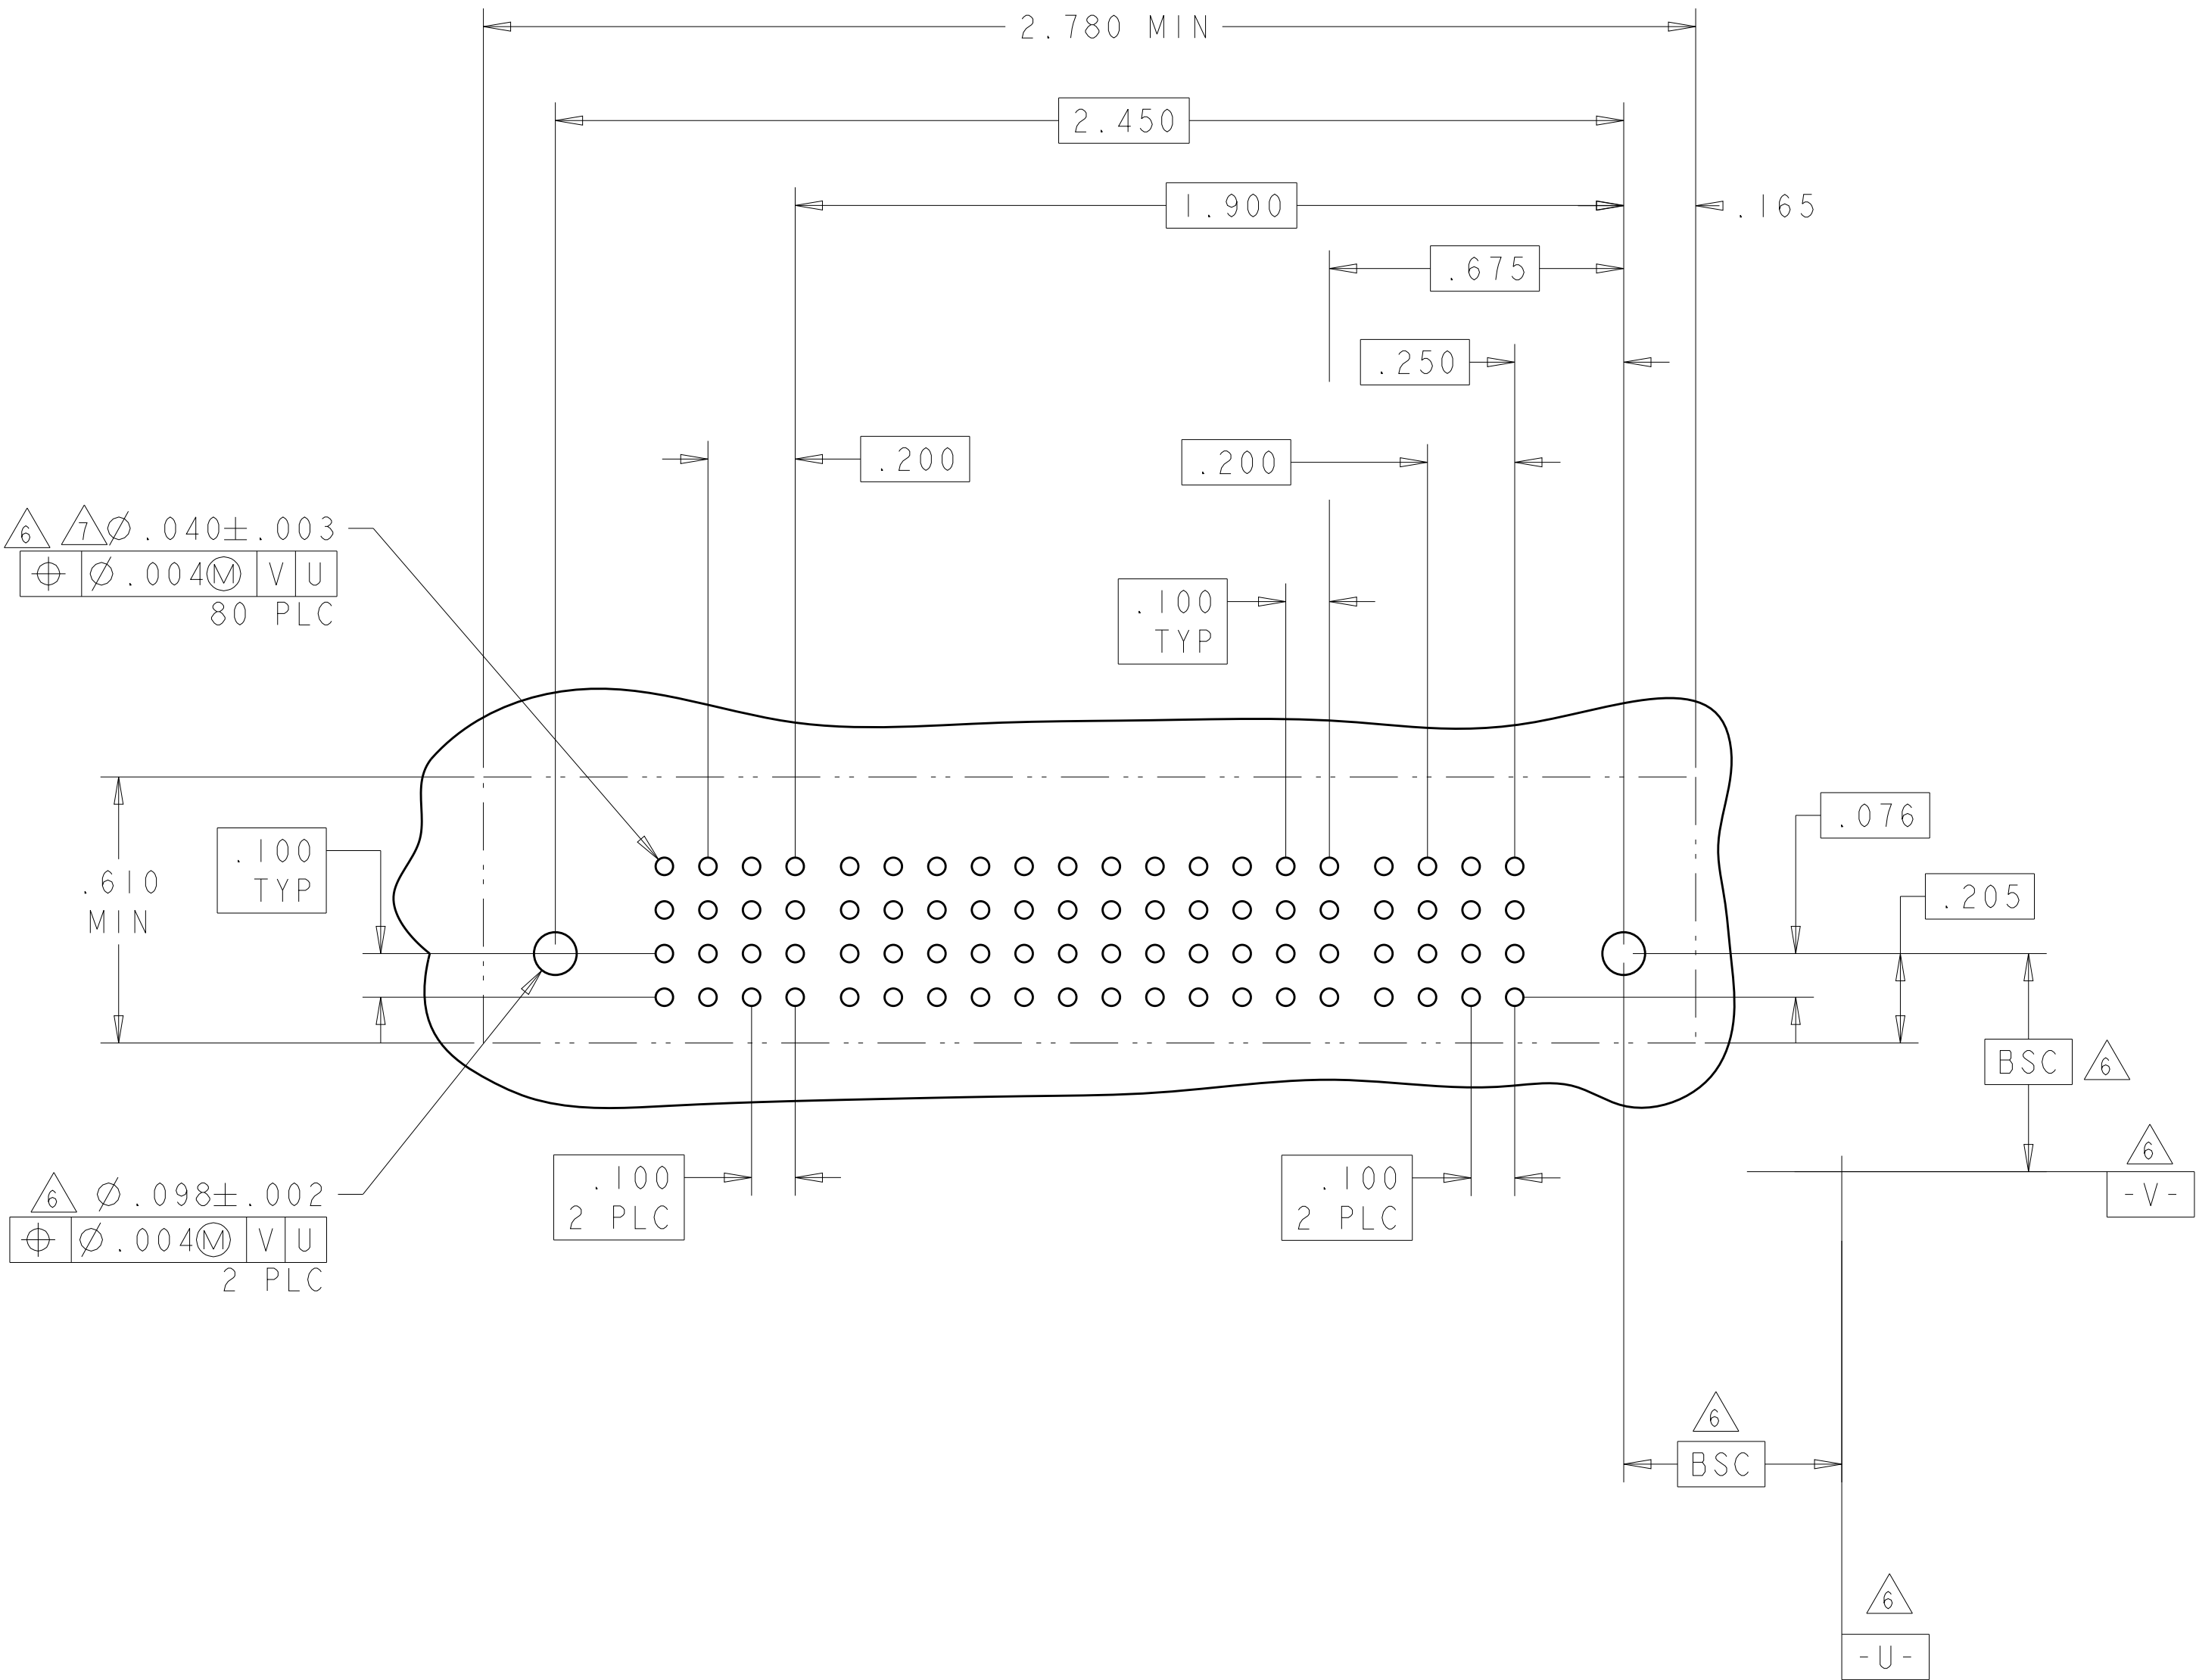
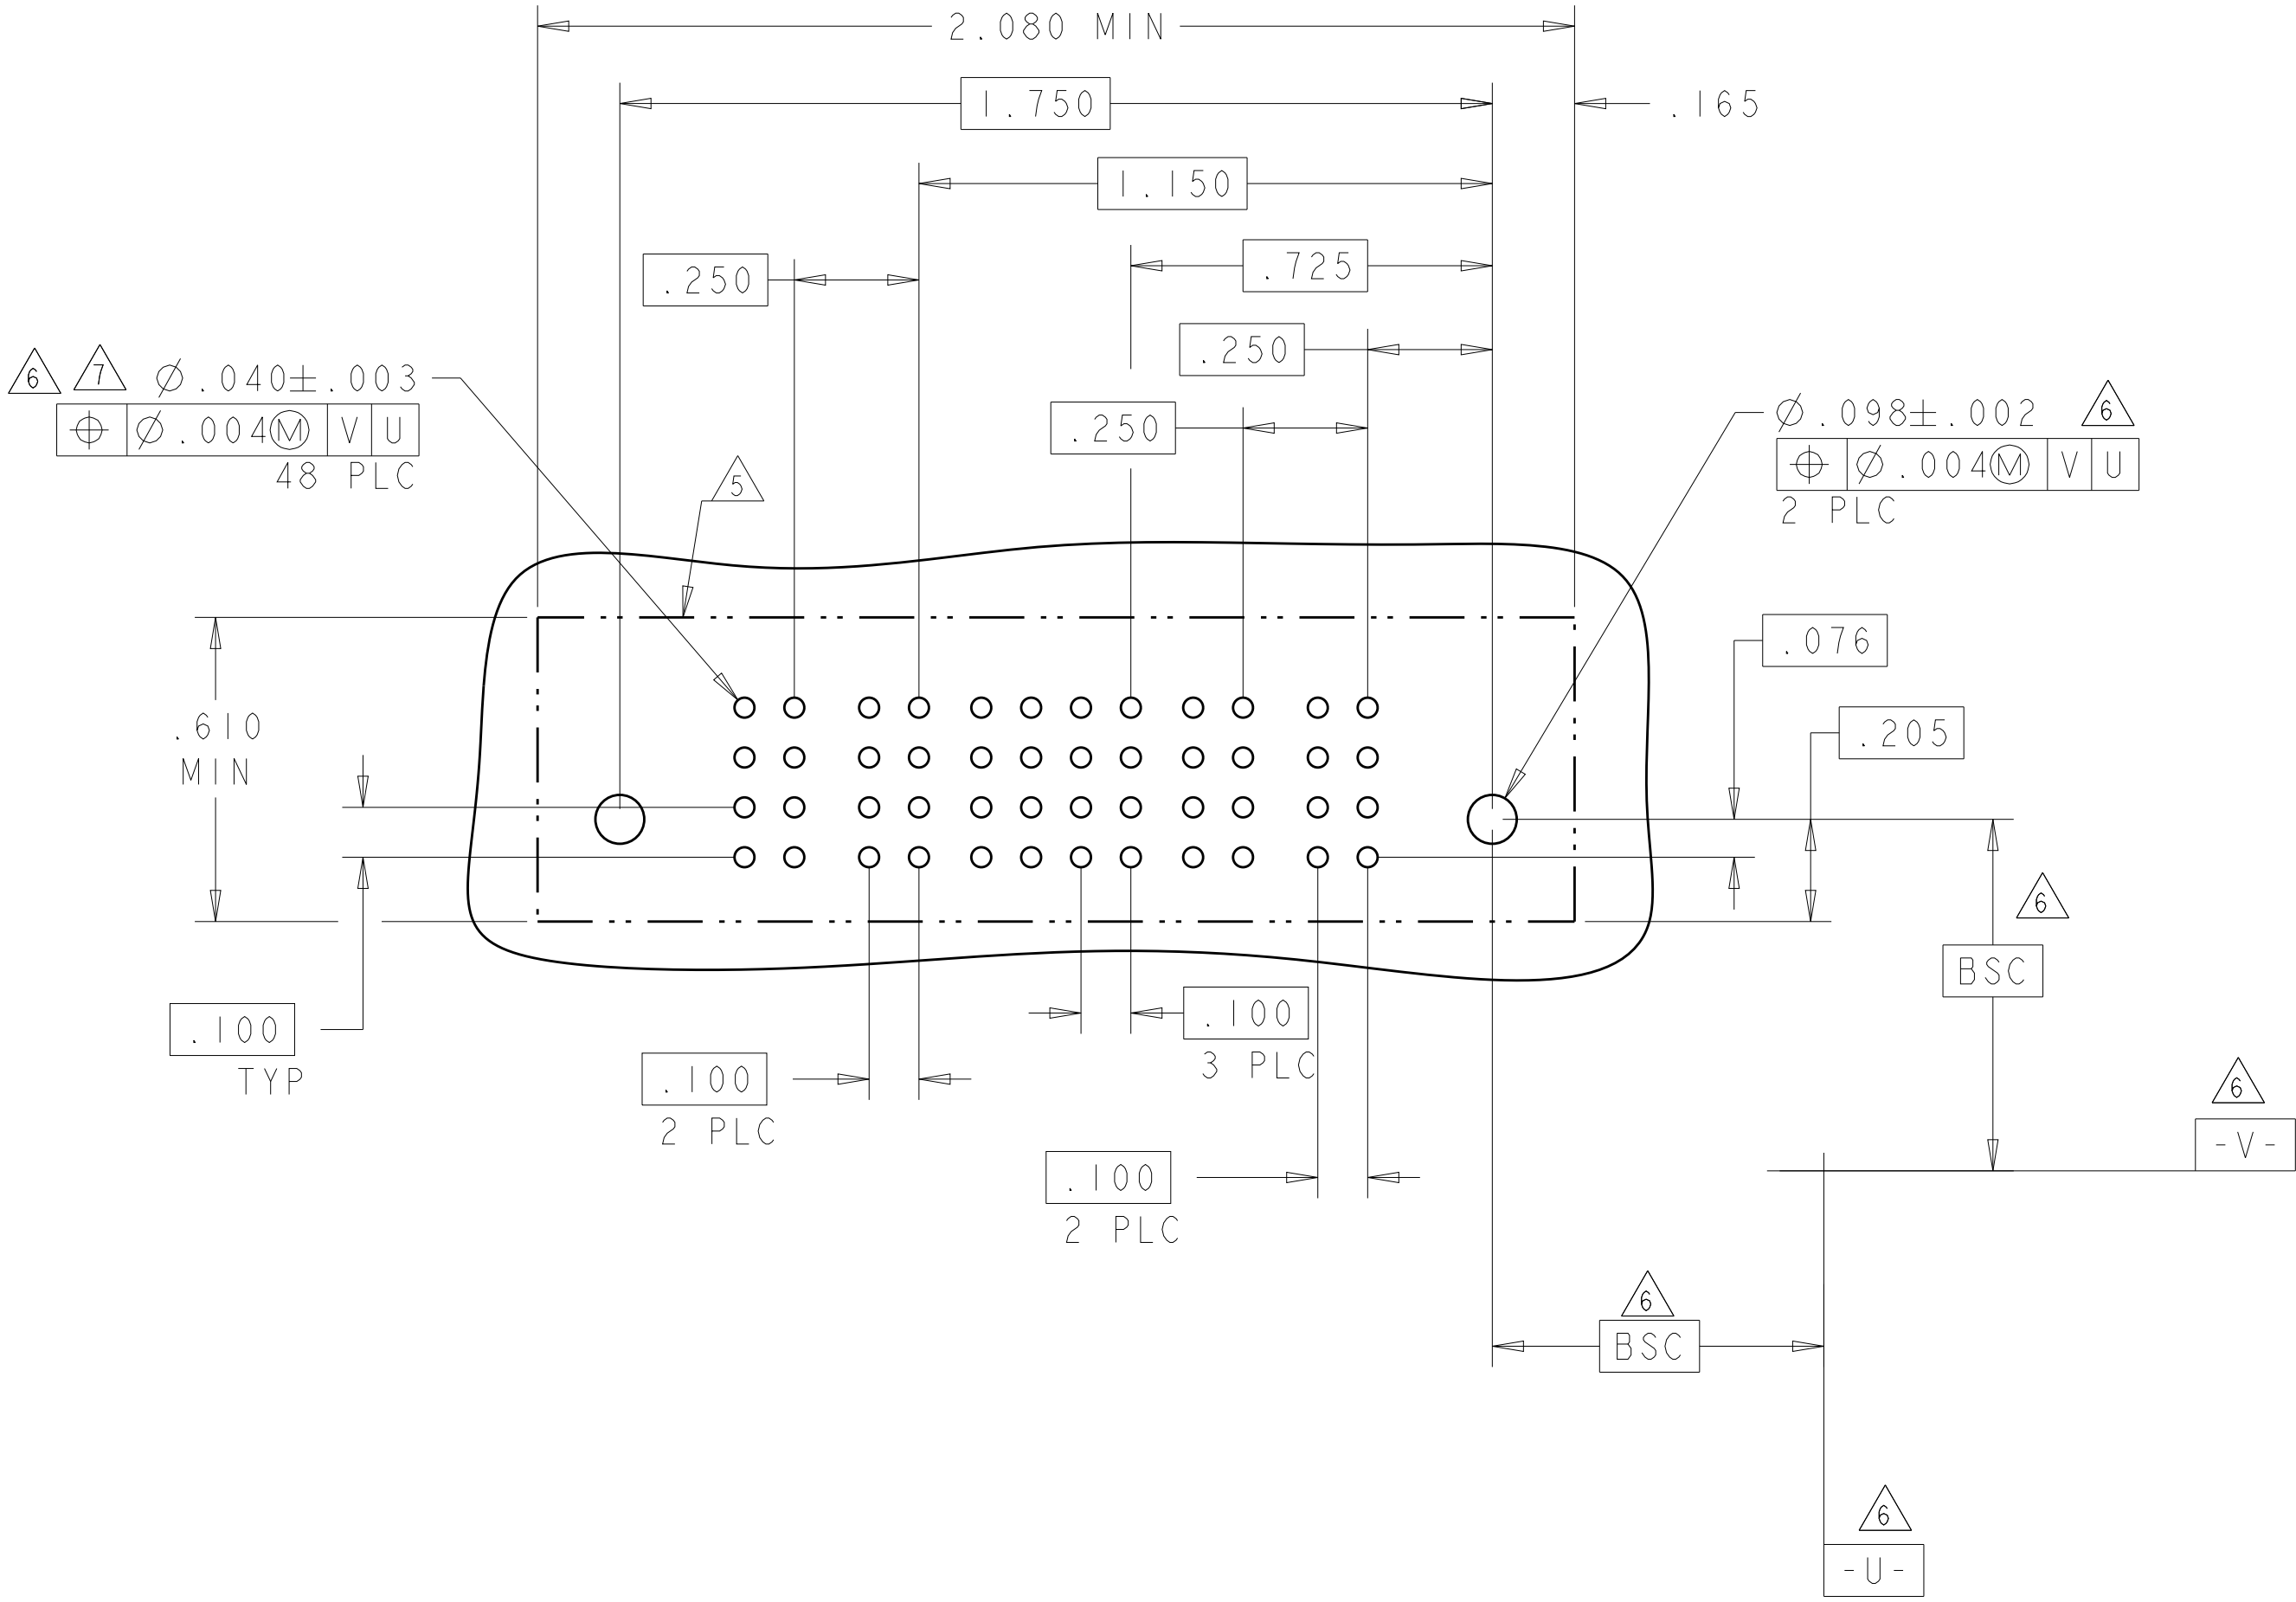



PART NUMBER	ROWS		POWER (L)			SIGNAL							POWER (R)				
			P7	P6	P5	6	5	4	3	2	1	P4	P3	P2	P1		
2-6450150-6	D					E	E	E	E	E	E						
	C					E	E	E	E	E							
	B					E	E	E	E	E							
	B					E	E	E	E	E							
	A					E	E	E	E	E							
																	
4P + 24S + 3ACP																	

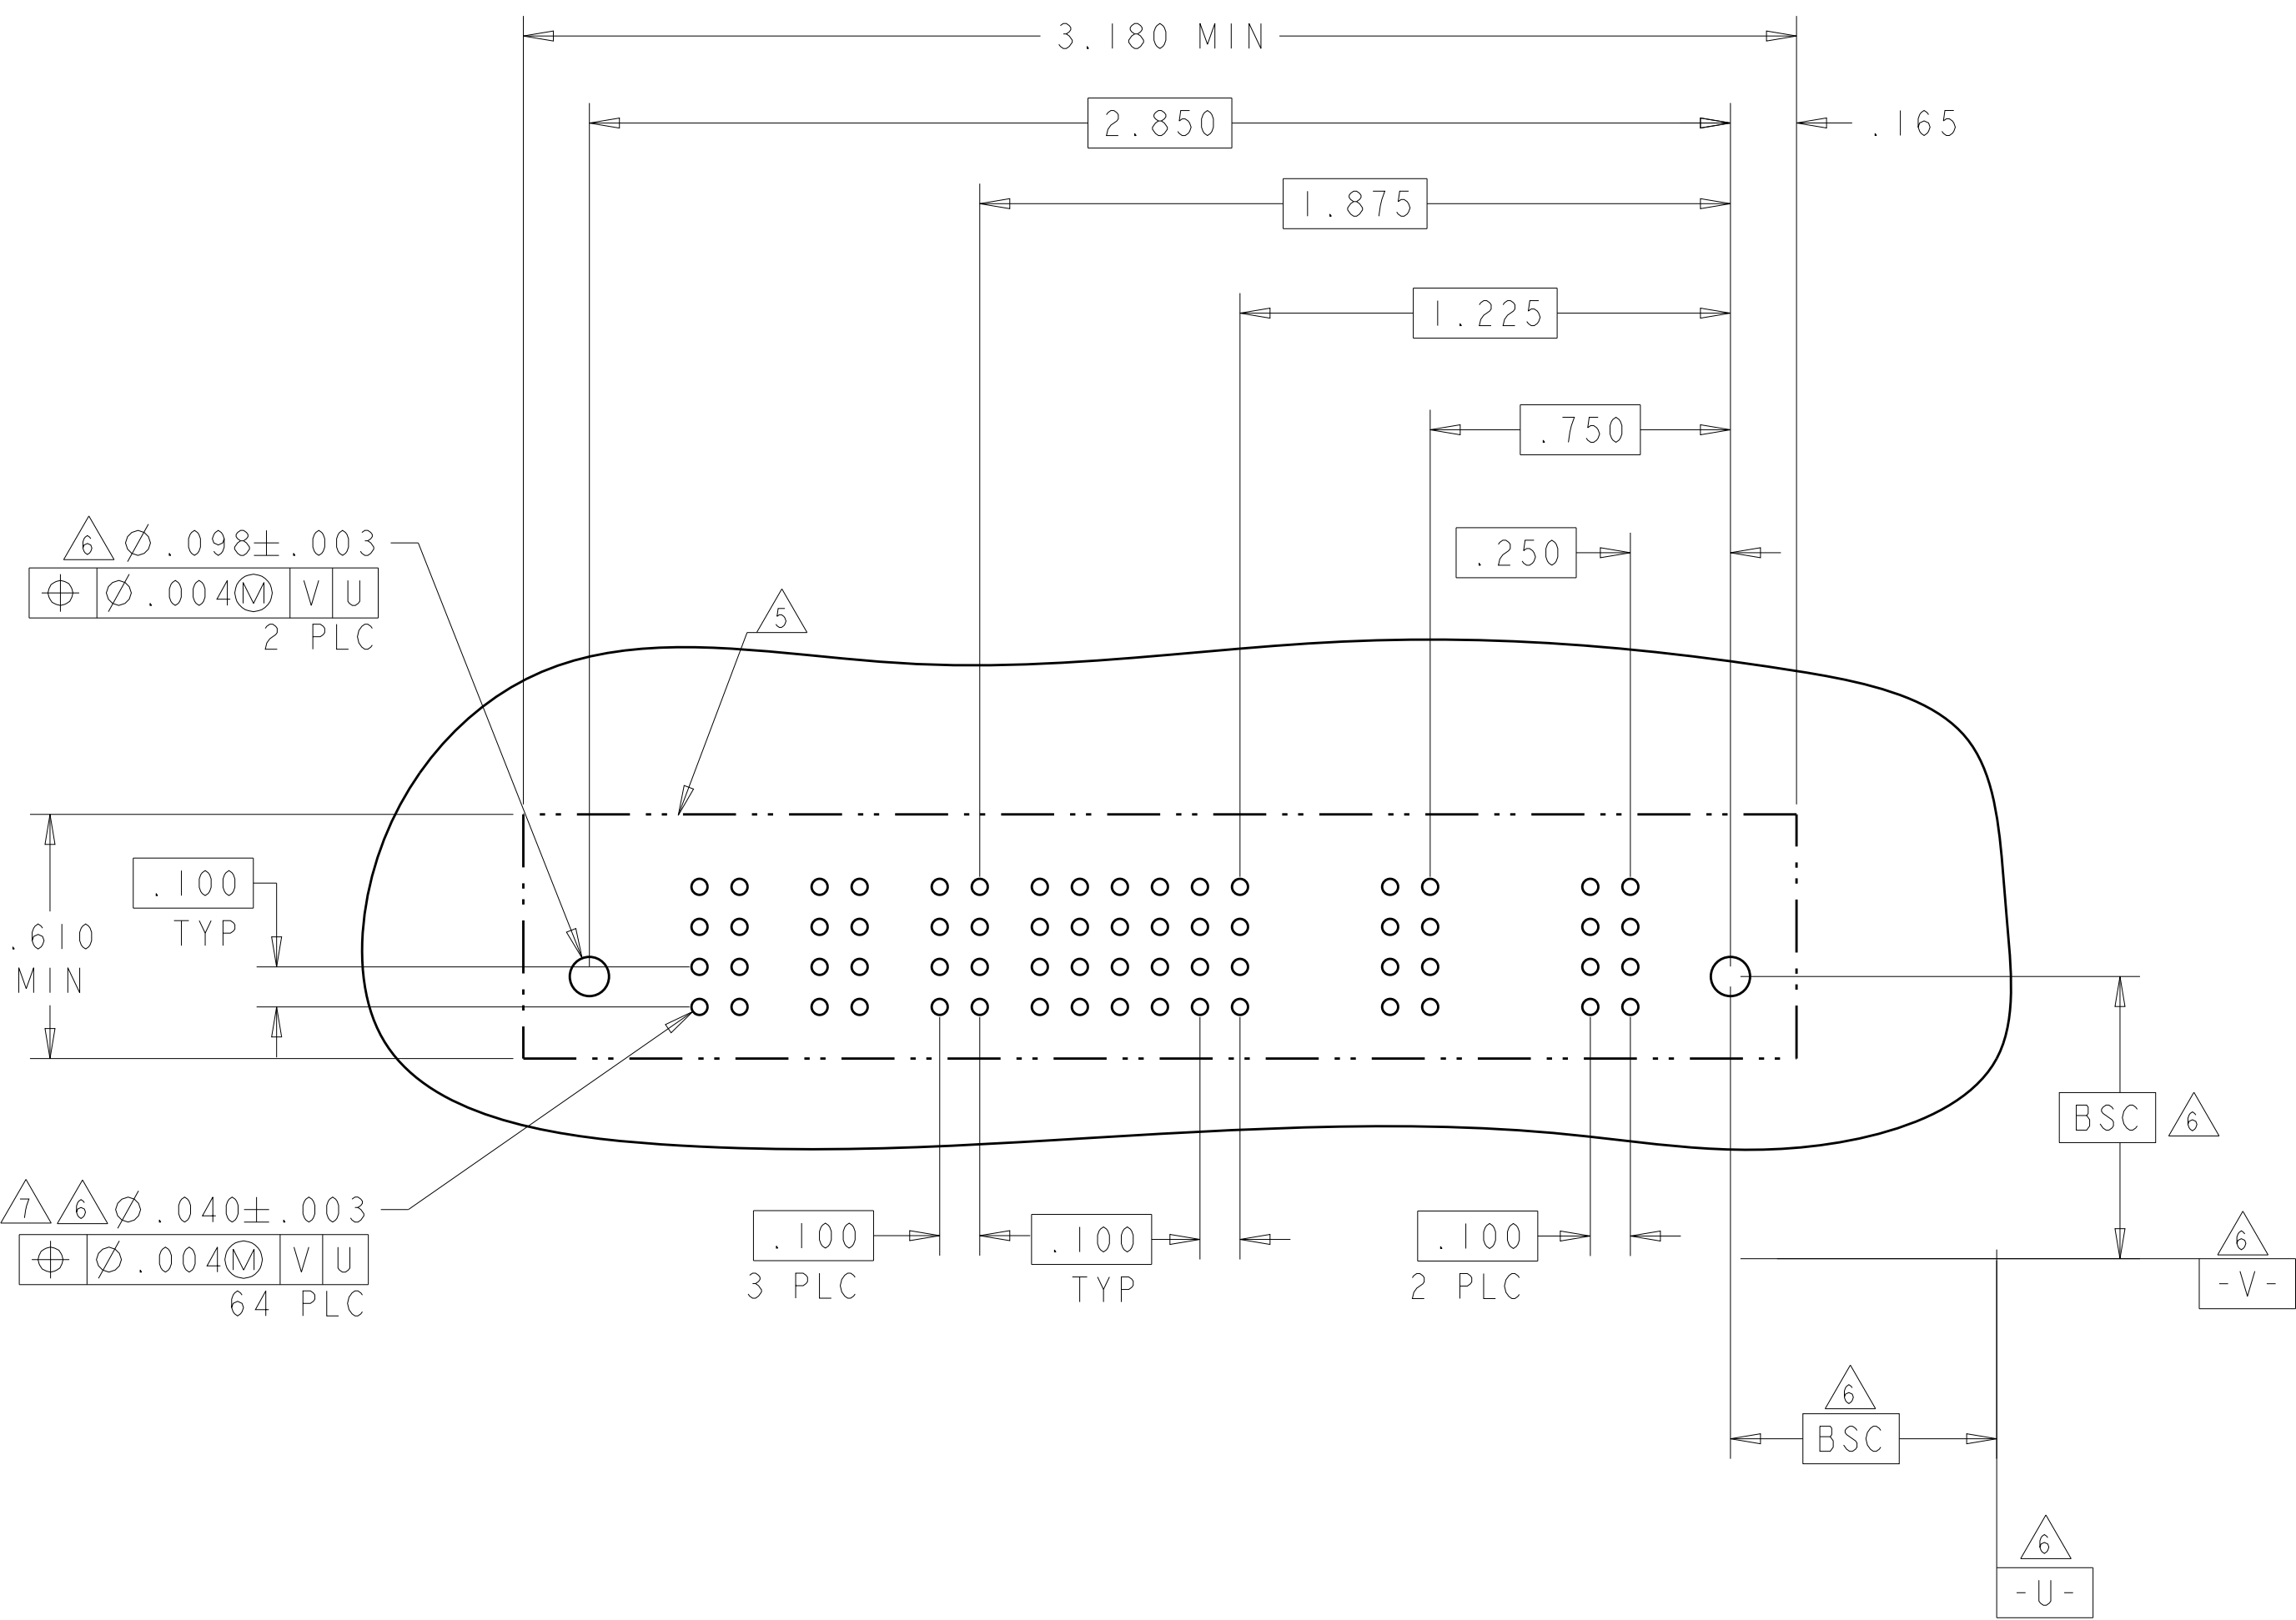FI

4805 (3/11)

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-	-	SEE SHEET 1	-	-	-

PART NUMBER	ROWS		POWER (L)						SIGNAL								POWER (R)																																																																										
			PI 4	PI 3	PI 2	PI 1	PI 0	P 9	8	7	6	5	4	3	2	1	P 8	P 7	P 6	P 5	P 4	P 3	P 2	P 1																																																																			
2-6450150-7	D C B A																																																																																										
																																																																																											
																																																																																											
																																																																																											
8ACP + 32S + 6ACP																																																																																											

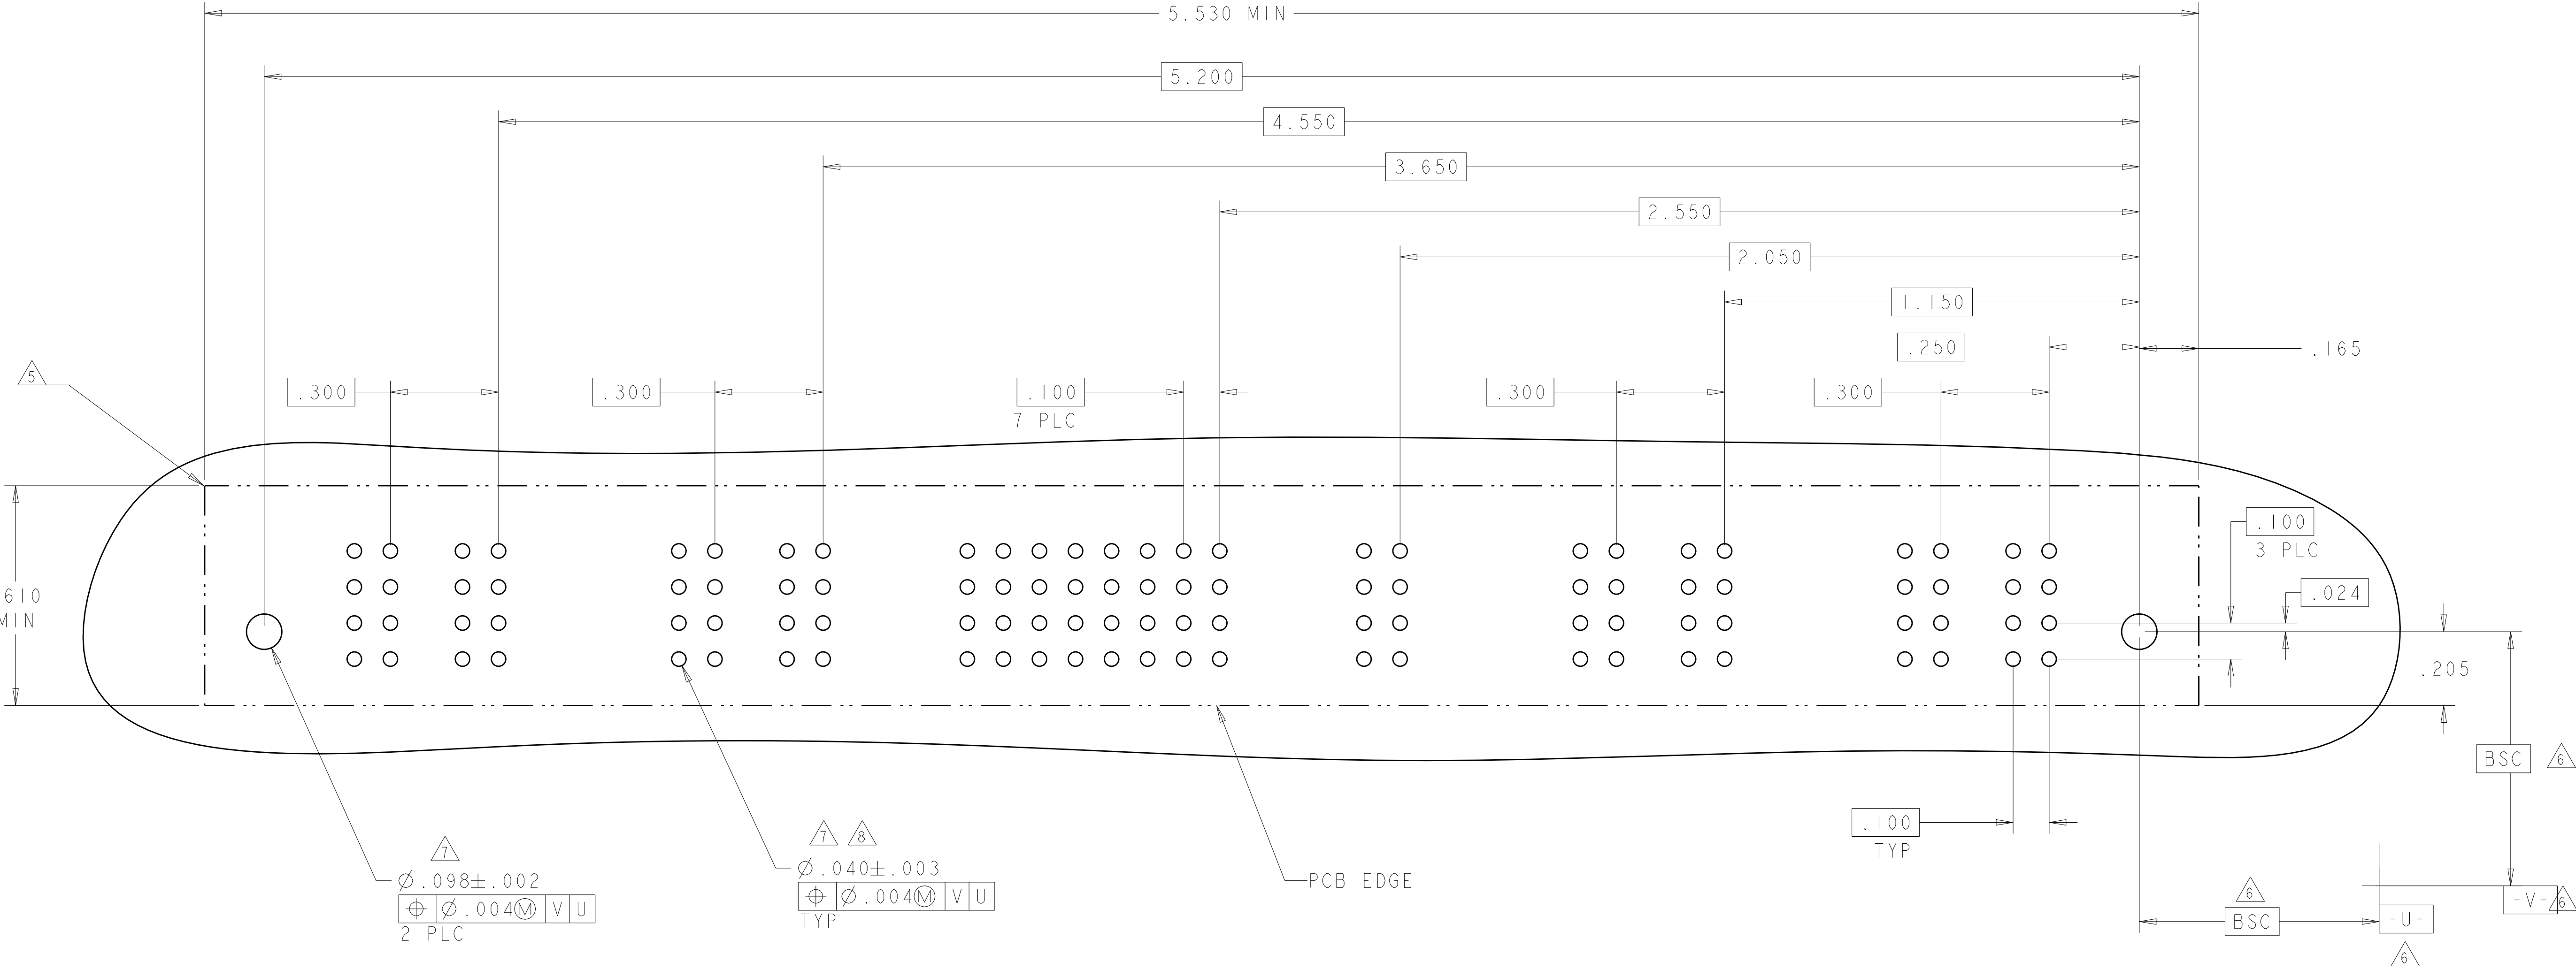

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN
R.GRZYBOWSKI
CHK
M.PERCHERKE
APVD
M.PERCHERKE

16FEB05
16FEB05

DIMENSIONS:
INCHES

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC ±.01
1 PLC ±.01
2 PLC ±.01
3 PLC ±.005
4 PLC ±.002
ANGLES ±.2°
FINISH

MATERIAL

-

NAME

VERTICAL RECEPTACLE ASSEMBLY
WITH GUIDES
MULTI-BEAM XL

SIZE

A1

CAGE CODE

00779

DRAWING NO

6450150

RESTRICTED TO

-

CUSTOMER DRAWING


SCALE 1:1

SHEET 11

OF 12


REV G5

LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
ES	00	-	-	SEE SHEET 1	-	-

PART NUMBER	ROWS		POWER						SIGNAL								
			P8	P7	P6	P5	P4	P3	4	3	2	3	2	1	P2	P1	
2-6450150-9	D		VM		VM		VA		E	E	E	E	E		VM	VM	
	E								E	E	E	E					
	E								E	E	E	E					
	E								E	E	E	E					
2P + 24S + 6P																	

NO CONTACTS LOADED

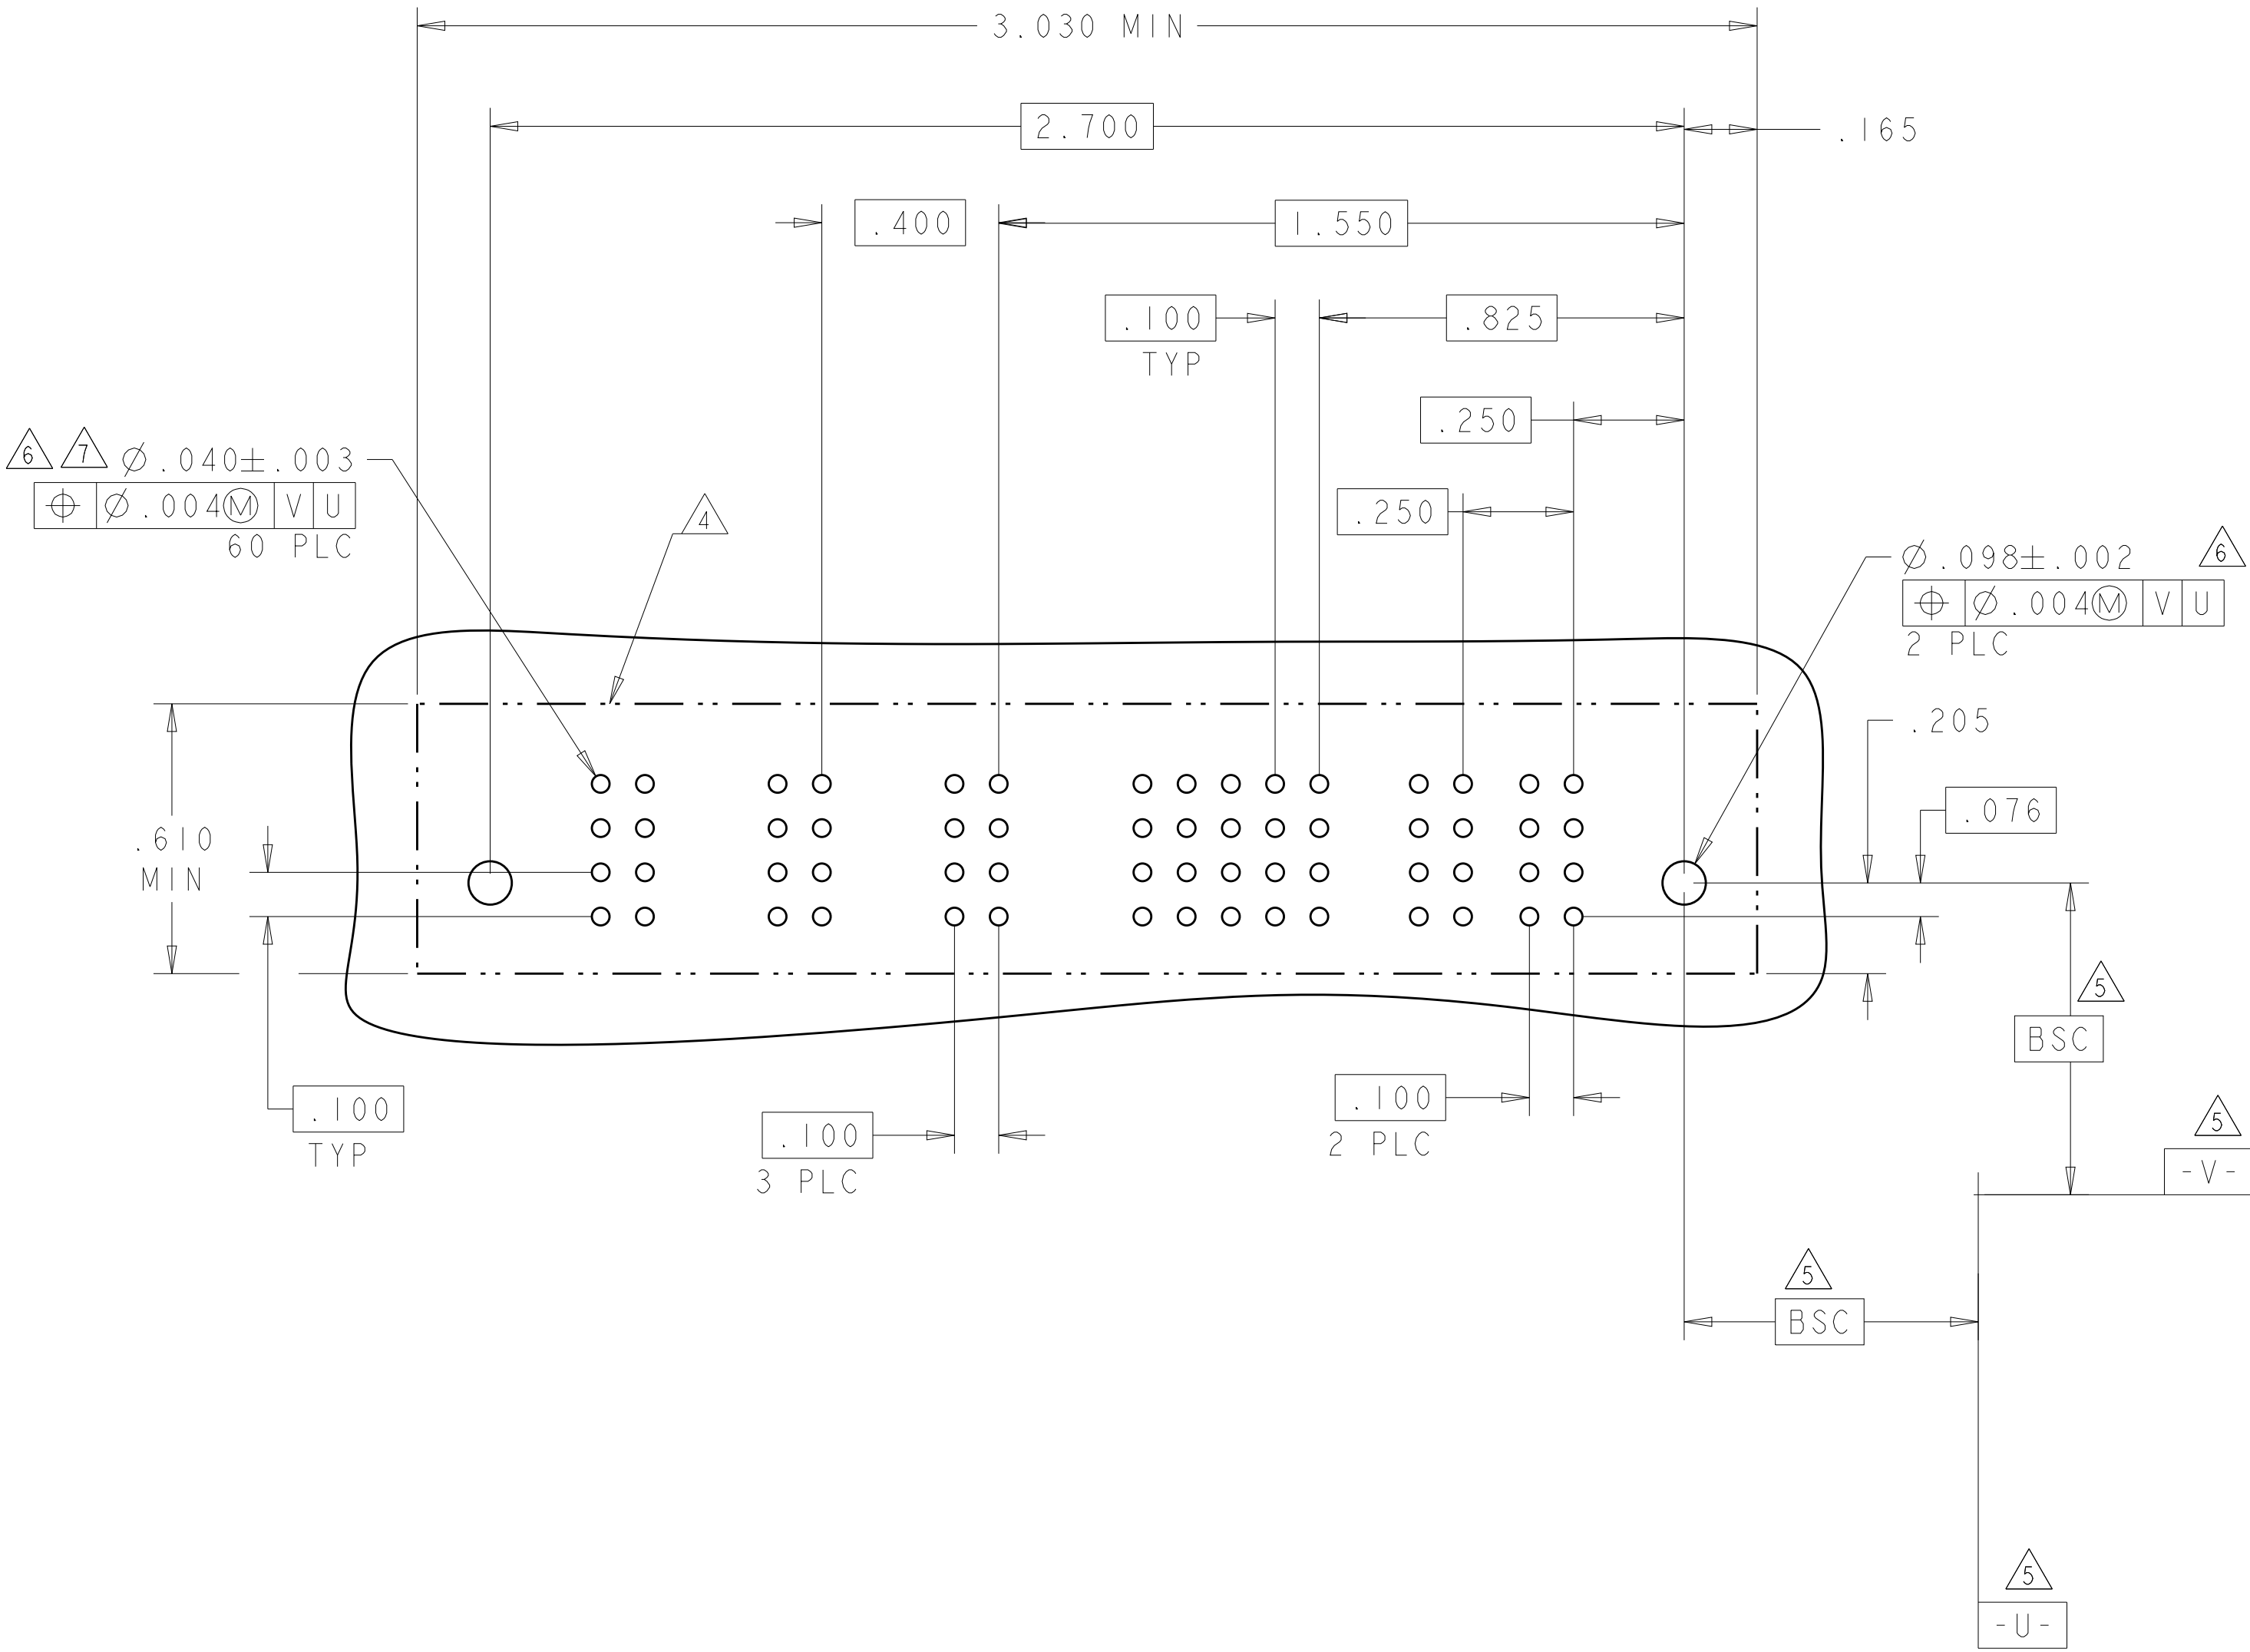NO CONTACTS LOADED



THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R.GRZYBOWSKI 16FEB05	TE Connectivity	
		CHK M.PERCHEKKE 16FEB05		
DIMENSIONS:		APVD M.PERCHEKKE -	NAME	
INCHES		PRODUCT SPEC		
		108-1973	SIZE	
		APPLICATION SPEC		
MATERIAL		114-13038	CAGE CODE	
		WEIGHT		
		CUSTOMER DRAWING	SCALE	
			SHEET	
			REV	