

IN24-5RD

Rubber duck Omni Antenna

2.4 GHZ APXTENDER RUBBER DUCK ANTENNA

The 5.5 dBi APXtender indoor rubber duck omnidirectional antenna is used to extend the range of indoor access points or client bridges in 802.11 2.4GHz wireless LAN environments. The antenna features a 360 horizontal transmission pattern and a 50 vertical transmission pattern. The transmit/receive element can be tilted in relation to the base to direct signal where it is needed (0 , 45 , 90). The antennas are available in various connectors to fit most wireless radio equipment.

FEATURES AND BENEFITS

- 5.5 dBi gain 2.4 GHz omnidirectional indoor antenna
- Direct replacement for 2.2 dBi rubber duck antenna that is standard on most indoor access points and bridges
- Extends range of 2.4 GHz wireless access points or wireless bridges
- Improved detent for better position stability
- Improved more rugged construction
- Improved more flexible radome
- Improved temperature operation range to 70°C
- Improved styling


MARKETS

- 2.4 GHz wireless access points
- 2.4 GHz wireless routers
- 2.4 GHz wireless client bridges
- 2.4 GHz wireless equipment

ORDERING INFO

PARAMETER	
Frequency range	2400 - 2485 mHz
Gain	5.5 dBi
VSWR	1.5:1
Impedance	50 ohm
Input power	10 watts
Operating temperature	-10° to +70°C
Weight	1.2 oz (34 g)
Dimension (Height x Dia)	8.07" x 0.57"D (205 mm x 14.5 mm D)

ANTENNA PATTERNS

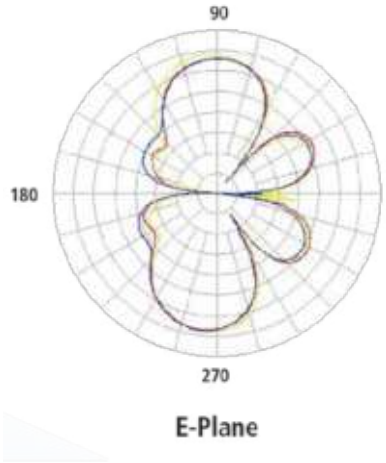

SYSTEM ORDERING

IN24-5RD-SmA 5.5 dBi 2.4 GHz APXtender – SmA male Connector
IN24-5RD-RSmA 5.5 dBi 2.4 GHz APXtender – Reverse Polarity SmA Connector (Dlink, smartBridges, etc)
IN24-5RD-RTNC 5.5 dBi 2.4 GHz APXtender – Reverse Polarity TNC Connector (Linksys, Cisco, etc)

TE TECHNICAL SUPPORT CENTER

USA:	+1 (800) 522-6752
Canada:	+1 (905) 475-6222
Mexico:	+52 (0) 55-1106-0800
Latin/S. America:	+54 (0) 11-4733-2200
Germany:	+49 (0) 6251-133-1999
UK:	+44 (0) 800-267666
France:	+33 (0) 1-3420-8686
Netherlands:	+31 (0) 73-6246-999
China:	+86 (0) 400-820-6015

te.com

TE, TE Connectivity, TE connectivity (logo), and EVERY CONNECTION COUNTS are trademarks owned or licensed by the TE Connectivity plc family of companies. Other product names, logos, and company names mentioned herein may be trademarks of their respective owners.

While TE has made every reasonable effort to ensure the accuracy of the information in this document, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, complete, correct, reliable or current. TE reserves the right to make any adjustments to the information contained herein at any time without notice. TE EXPRESSLY DISCLAIMS ALL IMPLIED WARRANTIES REGARDING THE INFORMATION CONTAINED HEREIN, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. In no event will TE be liable for any direct, indirect, incidental, special or consequential damages arising from or related to recipient's use of the information. It is the sole responsibility of recipient of this information to verify the results of this information using their engineering and product environment. Recipient assumes any and all risks associated with the use of the information. Antenna performance may vary. TE is a component manufacturer, and customer and/or end-user is responsible for all end-use compliance and regulatory requirements.

©2025 TE Connectivity. All Rights Reserved.

05/25 Original