



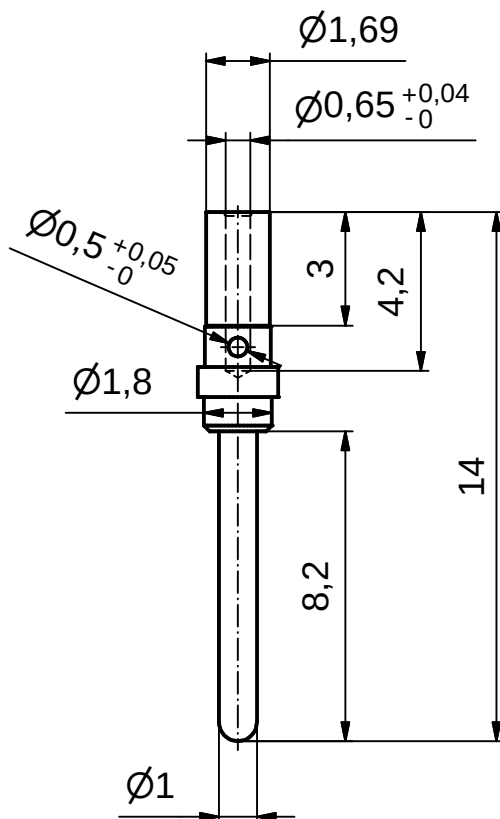

Directive 2002/95/EC
„RoHS“
Compliant

STRIPPING DIMENSION

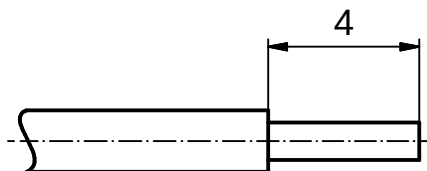

NOTES:

1. MATERIAL: COPPER ALLOY
2. PLATING: SEE TABLE
3. CRIMPING: USE CRIMP TOOL 360X10329X
WITH TOOL INSERT 360X20039X
- ⑥ SELECTOR SETTINGS: 7 FOR AWG 24
6 FOR AWG 26
5 FOR AWG 28


Plating	Part-No.
min. 8µin HARD GOLD over min. 50µin NICKEL	131A15029X
min. 30µin HARD GOLD over min. 50µin NICKEL	131C15029X
min. 50µin HARD GOLD over min. 50µin NICKEL	131J15029X

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH

DO NOT ALTER CAD DRAWING BY HAND

3 x b	Ä 3706	03.08.10	Lehm.
a	Origin		
rev.	description	date	name

tolerance



dim. in mm

date	name
drawn 29.04.08	Petker
appd. 30.04.08	Mickenbecker
norm	
d-old	

CONEC®

scale:

5.1

material:

SEE NOTES

title:

SIGNAL CRIMP CONTACT

MALE CONTACT

⑥ Wire Size 24-28

dwg no:

Inventor 10

DIN-

16K1A2290

A4

sh: 1

part no:

SEE TABLE