
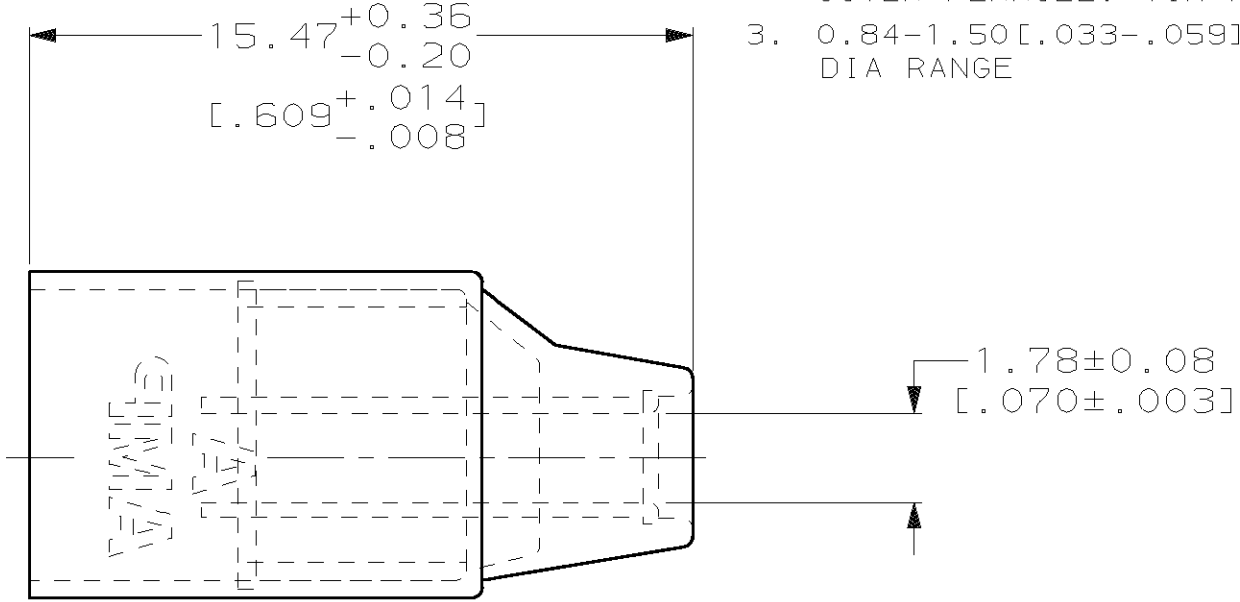


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION , 19 .
© COPYRIGHT 19 BY AMP INCORPORATED. ALL INTERNATIONAL RIGHTS RESERVED.

LOC	DIST	P	F	REVISIONS				
				ZONE	LTR	DESCRIPTION	DATE	APPD
AJ	16				M	REV PER 0U20-0163-99	08NOV99	M0

- 1 MATERIALS:
INNER FERRULE: BRASS PER MIL-C-50
OUTER FERRULE: COPPER PER QQ-C-576
MOLDING: NYLON (COLOR: VIOLET)
- 2 FINISH:
INNER FERRULE: TIN PL PER MIL-T-10727
OUTER FERRULE: TIN PL PER MIL-T-10727
3. 0.84-1.50[.033-.059] PRIMARY INSULATION DIA RANGE

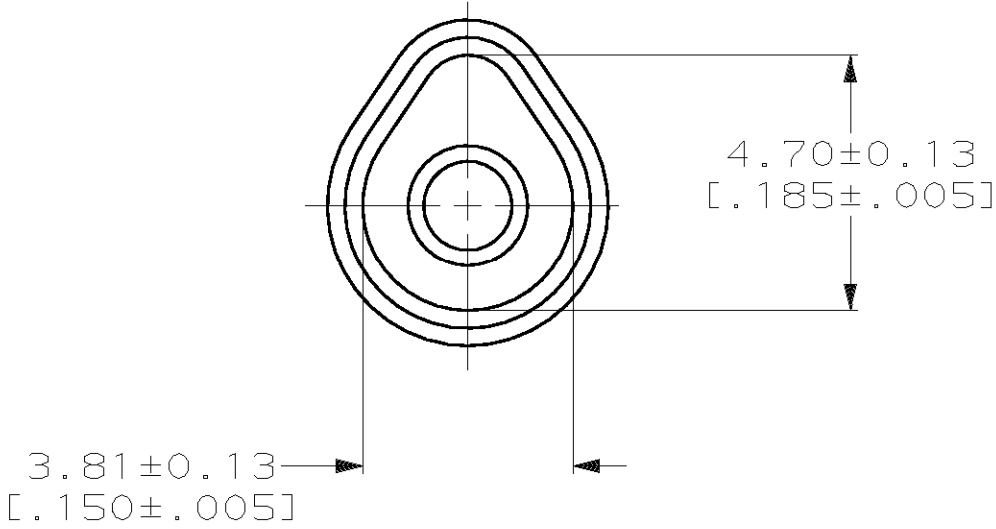

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.

				PART NO	
DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm [INCHES] TOLERANCES ON: 2 PLC DEC ± .20[.008] 3 PLC DEC ± - ANGLES ± -	DR	01/13/93 J.DAVIS	AMP AMP Incorporated Harrisburg, PA 17105-3608		
	CHK	02/05/93 G.MICHAEL			
	APPD	02/05/93 G.MICHAEL	NAME CONN, COAX, R.F., TERMASHIELD, FERRULE		
	APPD	02/05/93 J.DAVIS			
MATERIAL 1	PRODUCT SPEC -		SIZE B CAGE CODE 00779 DRAWING NO C-329331		
FINISH 2	APPLICATION SPEC -				
		WEIGHT .024 OZ	SCALE NTS		SHEET 1 OF 1