

4


3

2

1

used for:

D-SUB

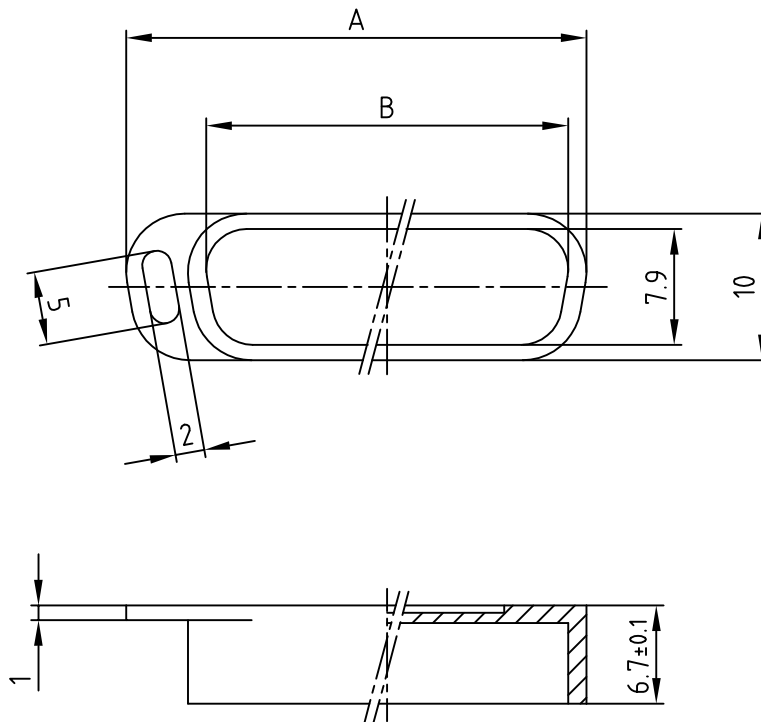


TO PREVENT DAMAGE AT LOW TEMPERATURES NO
IMPACT OR EXTREM MECHANICAL LOAD SHOULD
APPLIED TO THE CAP.
MECHANICAL LOAD SHOULD BE APPLIED ABOVE 0° C

POS.	A	B	Part No.
9	22.9	16.5	600X518009X
15	31.4	24.7	600X518015X
25	44.7	38.3	600X518025X
37	61.2	54.5	600X518037X

RoHS compliant

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH
DO NOT ALTER CAD DRAWING BY HAND

				tolerance DIN 16901 - 150			 dim. in mm
				2015	date	name	
				drawn	04.03.	Henneboel	
				appd.	04.03.	Lehmenkühler	
				norm			
				d-old			
a	Original						
rev.	description	date	name				

scale:	2:1	
material:	ABS, Nickel plated	
title:	DUST CAP for socket connector 9 - 37pos.	
dwg no:	16V2IM5A	DIN-A 4
part no:	See Table	sh: 1/1