
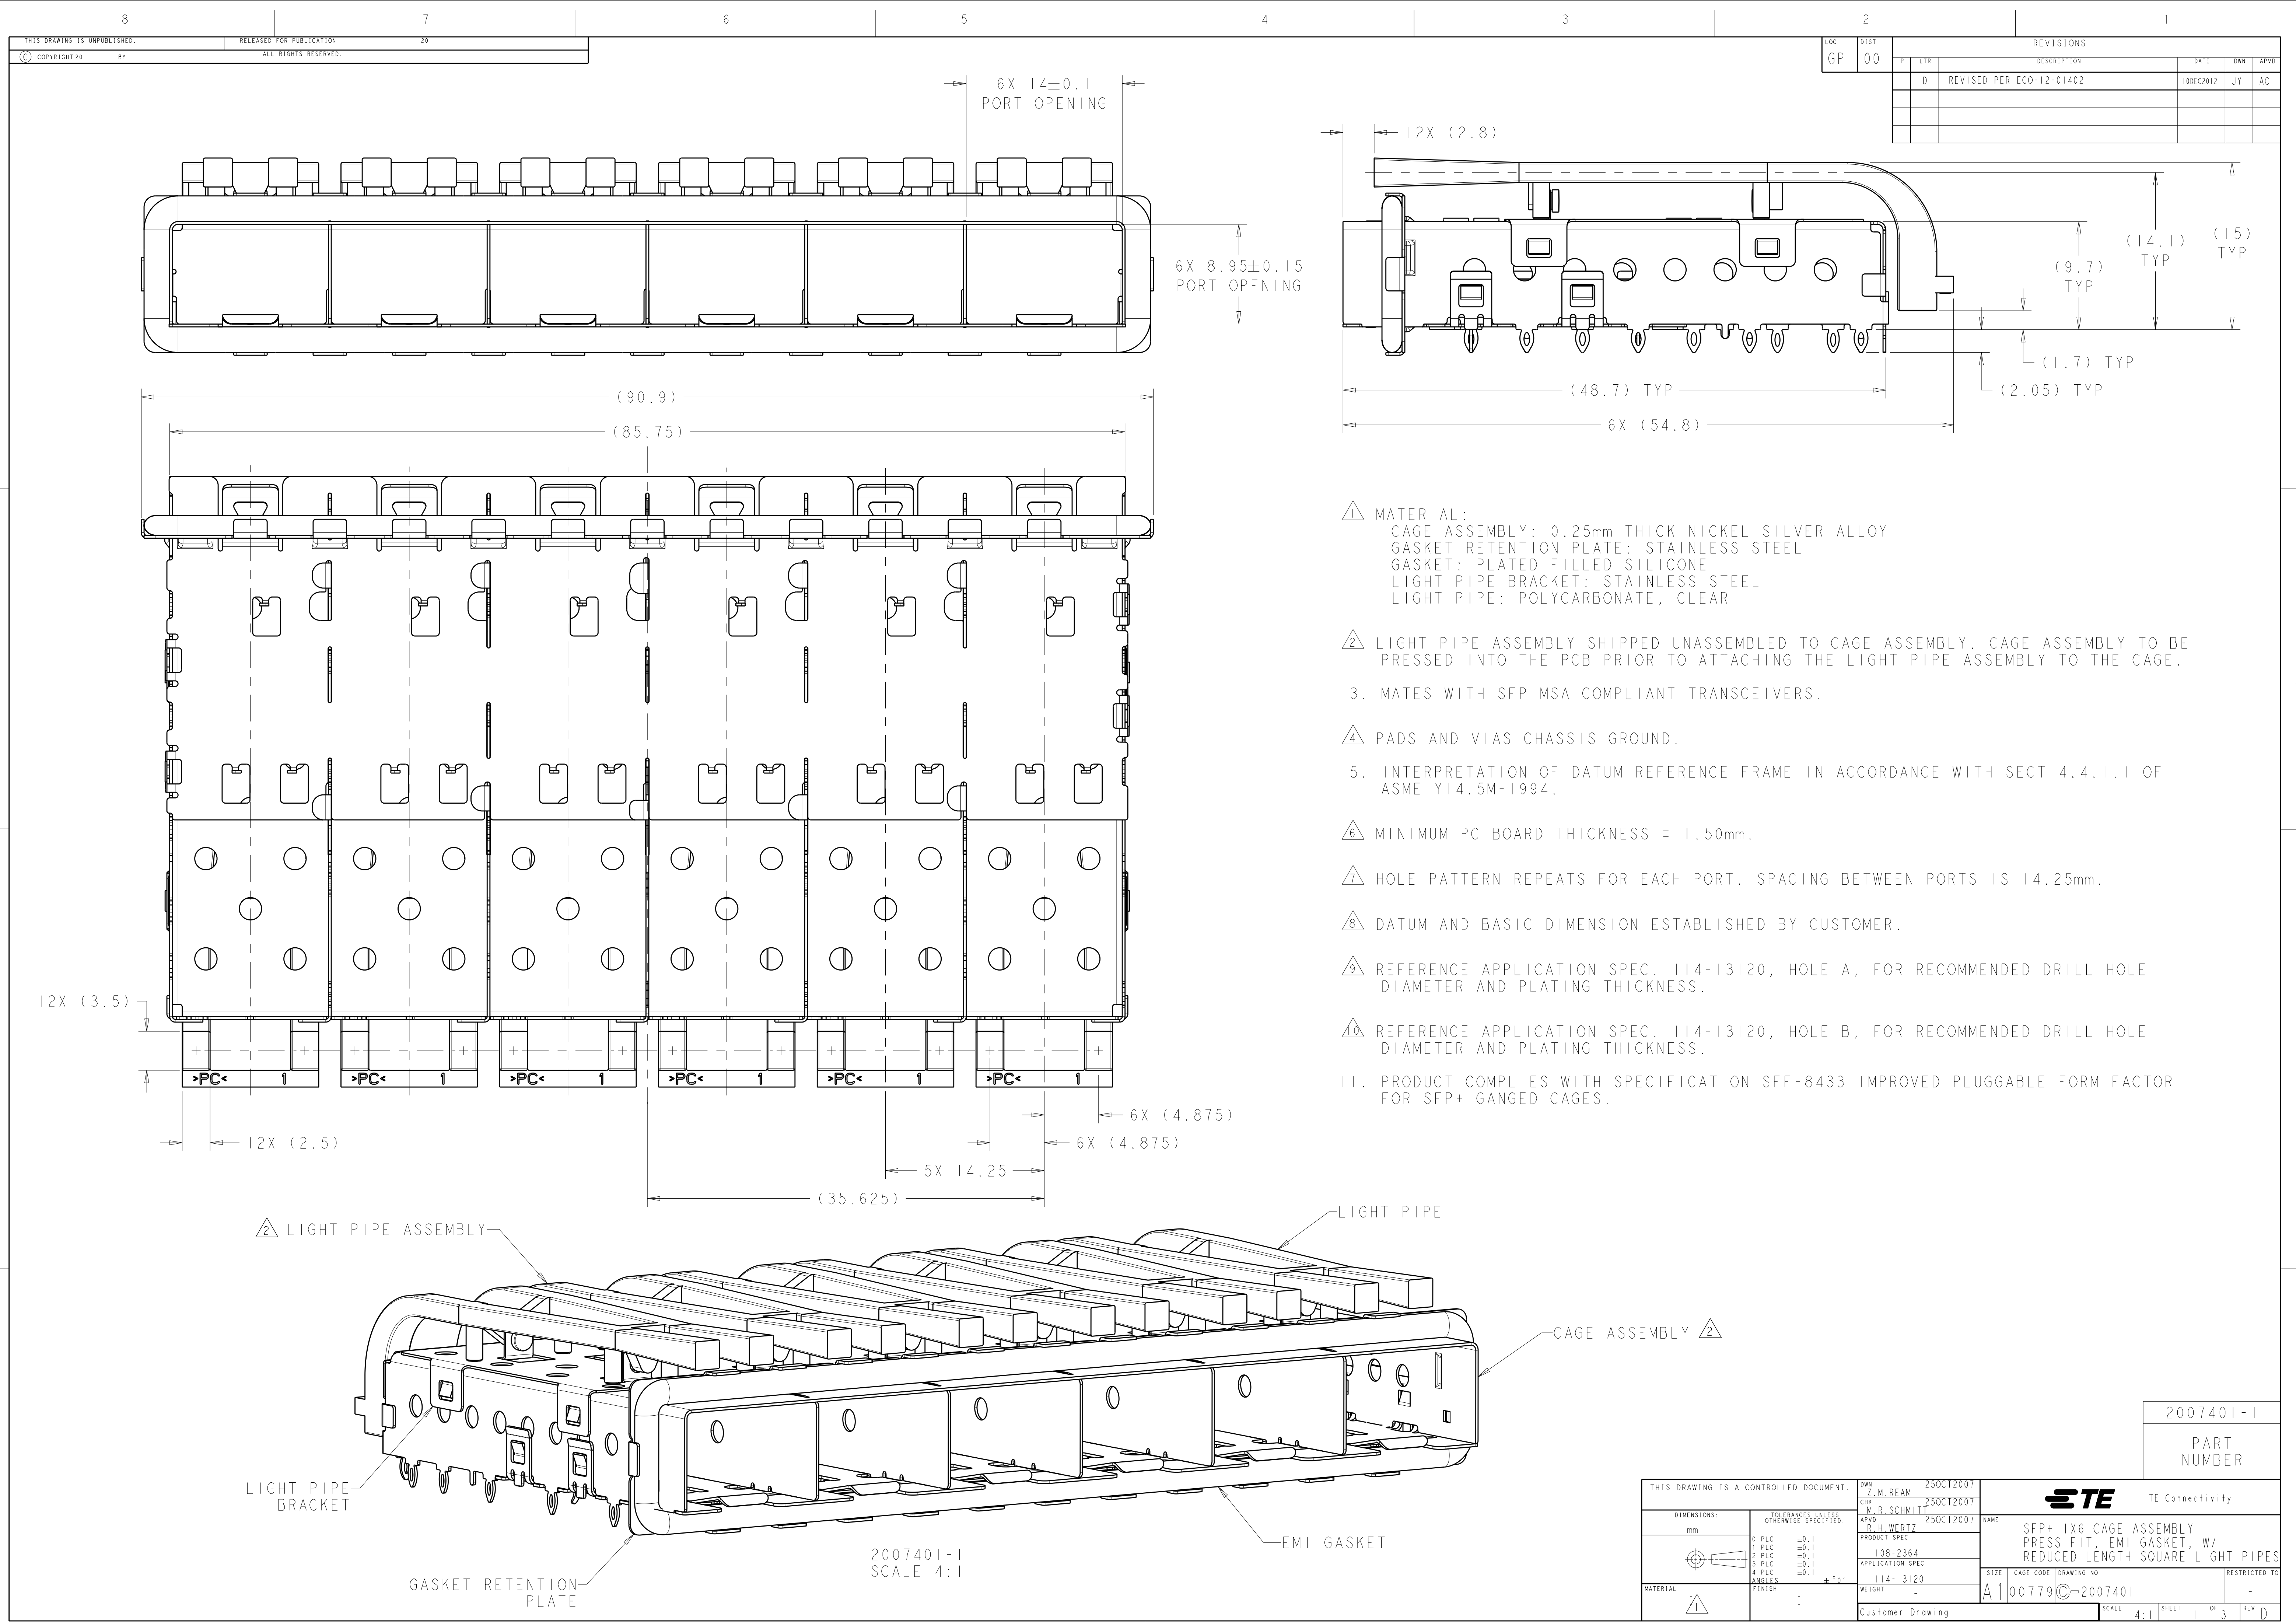


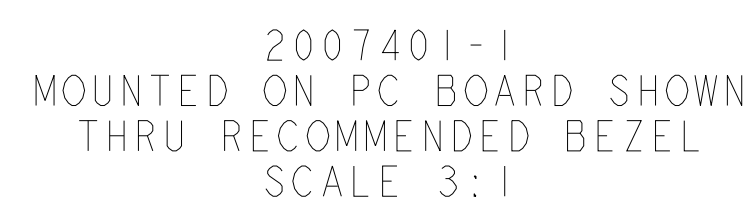

LOC		DIST		REVISES			
GP		00		P	LTR	DESCRIPTION	DATE
				D		REVISED PER ECO-12-014021	10DEC2012

- △ MATERIAL:
CAGE ASSEMBLY: 0.25mm THICK NICKEL SILVER ALLOY
GASKET RETENTION PLATE: STAINLESS STEEL
GASKET: PLATED FILLED SILICONE
LIGHT PIPE BRACKET: STAINLESS STEEL
LIGHT PIPE: POLYCARBONATE, CLEAR
- △ LIGHT PIPE ASSEMBLY SHIPPED UNASSEMBLED TO CAGE ASSEMBLY. CAGE ASSEMBLY TO BE PRESSED INTO THE PCB PRIOR TO ATTACHING THE LIGHT PIPE ASSEMBLY TO THE CAGE.
3. MATES WITH SFP MSA COMPLIANT TRANSCEIVERS.
- △ PADS AND VIAS CHASSIS GROUND.
5. INTERPRETATION OF DATUM REFERENCE FRAME IN ACCORDANCE WITH SECT 4.4.1.1 OF ASME Y14.5M-1994.
- △ MINIMUM PC BOARD THICKNESS = 1.50mm.
- △ HOLE PATTERN REPEATS FOR EACH PORT. SPACING BETWEEN PORTS IS 14.25mm.
- △ DATUM AND BASIC DIMENSION ESTABLISHED BY CUSTOMER.
- △ REFERENCE APPLICATION SPEC. 114-13120, HOLE A, FOR RECOMMENDED DRILL HOLE DIAMETER AND PLATING THICKNESS.
- △ REFERENCE APPLICATION SPEC. 114-13120, HOLE B, FOR RECOMMENDED DRILL HOLE DIAMETER AND PLATING THICKNESS.
11. PRODUCT COMPLIES WITH SPECIFICATION SFF-8433 IMPROVED PLUGGABLE FORM FACTOR FOR SFP+ GANGED CAGES.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN Z.M. REAM	25OCT2007	2007401-1	
DIMENSIONS:		CHK M.R. SCHMITT	25OCT2007	PART NUMBER	
mm		APVD R.H. WERTZ	25OCT2007	TE Connectivity	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC		SFP+ 1X6 CAGE ASSEMBLY	
0 PLC		108-2364		PRESS FIT, EMI GASKET, W/	
1 PLC		APPLICATION SPEC		REDUCED LENGTH SQUARE LIGHT PIPES	
2 PLC		114-13120		SIZE	
3 PLC				CAGE CODE	
4 PLC				DRAWING NO	
ANGLES				RESTRICTED TO	
FINISH				A1	
MATERIAL				00779C=2007401	
				Customer Drawing	
				SCALE 4:1	
				SHEET 1 OF 3	
				REV D	

4805 (3/11)

