


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -,- .
© COPYRIGHT – TE Connectivity Ltd. ALL RIGHTS RESERVED.


REVISIONS


P	LTR	DESCRIPTION	DATE	DWN	APVD
	B2	REVISED AS ECR-24-227878	22NOV2024	MK	SSM

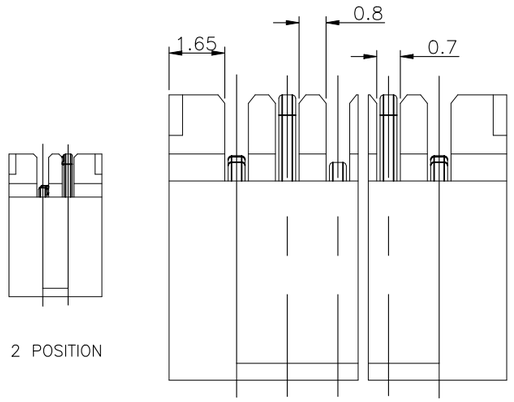


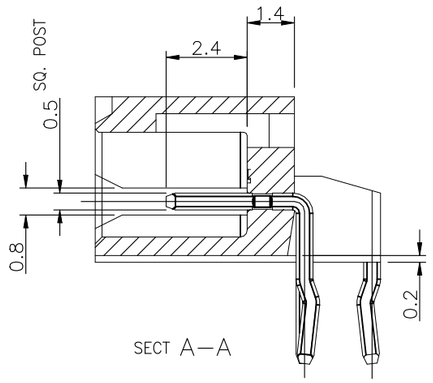





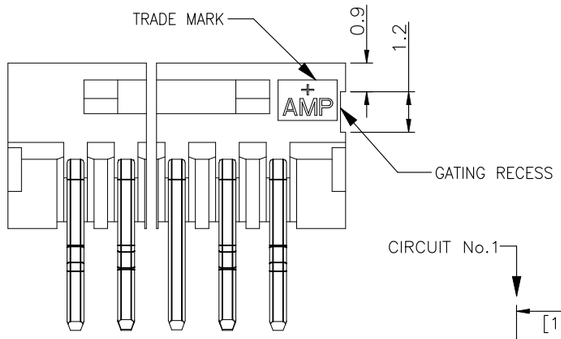

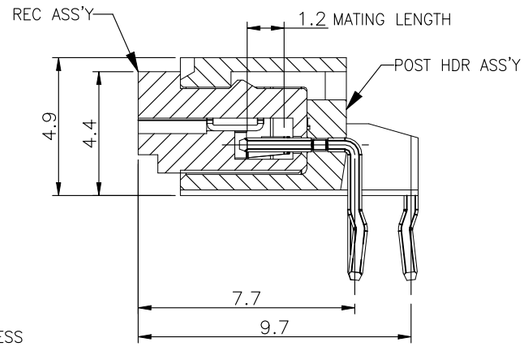

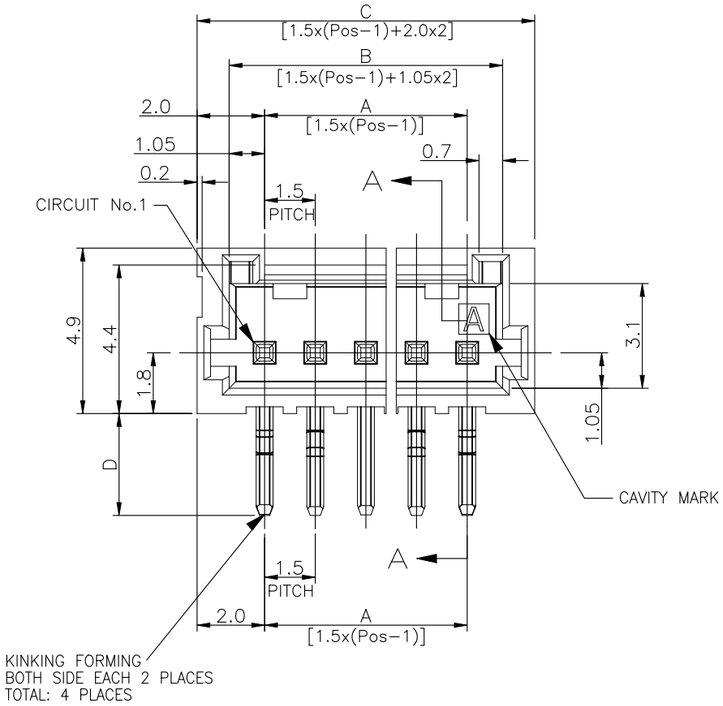

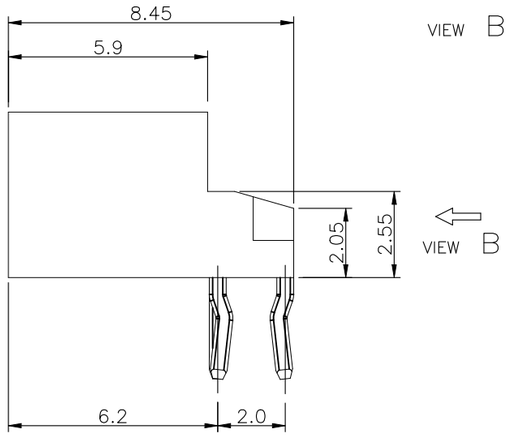

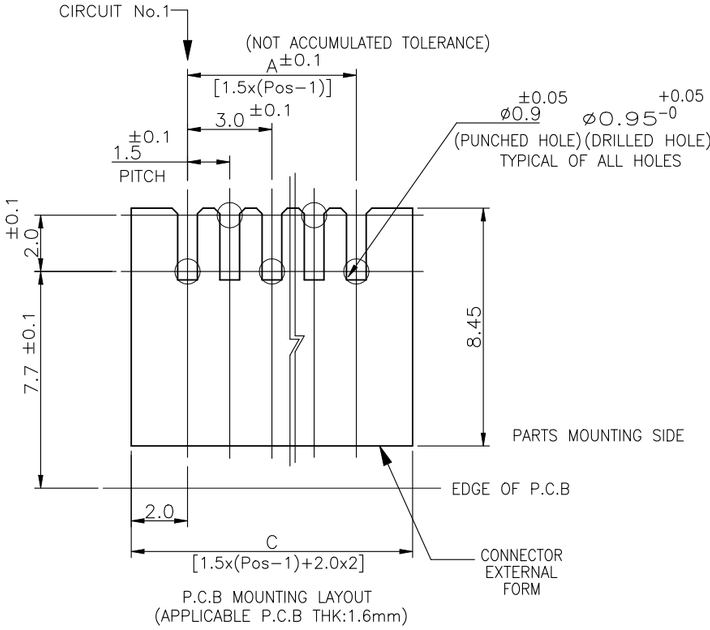

NOTES:

1. MATERIAL:
   HOUSING:NYLON(G.F.) UL94V-0,COLOR:NATURAL,BLUE,BLACK
   POST:PRE-TIN 0.5mm SQ. BRASS WIRE

TOLERANCES UNLESS OTHERWISE SPECIFIED:

10⩾ * : ±0.2
30⩾ * >10 : ±0.25
100⩾ * >30 : ±0.3
ANGLE : ±3°

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:
mm	0 PLC ± –
	1 PLC ± –
	2 PLC ± –
	3 PLC ± –
	4 PLC ± –
	ANGLES ± –
MATERIAL: SEE NOTE 1	FINISH: SEE NOTE 1

DWN	Tommy Qian	07NOV2018
CHK	Wenke He	07NOV2018
APVD	Wenke He	07NOV2018
PRODUCT SPEC	108-60018	
APPLICATION SPEC	114-5223	
WEIGHT	SEE TABLE	

TE Connectivity

NAME: AMP Mini CT Connector 1.5mm Pitch Single Row HDR Ass'y (H) DIP Staggered Type with Kink

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-292206	—

CUSTOMER DRAWING | SCALE NON | SHEET 1 OF 2 | REV B2

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -,- .
© COPYRIGHT – TE Connectivity Ltd. ALL RIGHTS RESERVED.

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	–	SEE SHEET 1	–	—	—

WEIGHT (g)	DIMENSIONS D	C	B	A	Pos.	PART NO BLUE	BLACK	NATURAL
0.28	2.5	8.5	6.6	4.5	4			9–292206–4
0.23	2.5	7.0	5.1	3.0	3			9–292206–3
1.11	3.0	32.5	30.6	28.5	20	7–292206–0	4–292206–0	2–292206–0
1.06	3.0	31.0	29.1	27.0	19	6–292206–9	3–292206–9	1–292206–9
1.01	3.0	29.5	27.6	25.5	18	6–292206–8	3–292206–8	1–292206–8
0.96	3.0	28.0	26.1	24.0	17	6–292206–7	3–292206–7	1–292206–7
0.91	3.0	26.5	24.6	22.5	16	6–292206–6	3–292206–6	1–292206–6
0.86	3.0	25.0	23.1	21.0	15	6–292206–5	3–292206–5	1–292206–5
0.81	3.0	23.5	21.6	19.5	14	6–292206–4	3–292206–4	1–292206–4
0.75	3.0	22.0	20.1	18.0	13	6–292206–3	3–292206–3	1–292206–3
0.70	3.0	20.5	18.6	16.5	12	6–292206–2	3–292206–2	1–292206–2
0.65	3.0	19.0	17.1	15.0	11	6–292206–1	3–292206–1	1–292206–1
0.60	3.0	17.5	15.6	13.5	10	6–292206–0	3–292206–0	1–292206–0
0.54	3.0	16.0	14.1	12.0	9	5–292206–9	2–292206–9	292206–9
0.49	3.0	14.5	12.6	10.5	8	5–292206–8	2–292206–8	292206–8
0.44	3.0	13.0	11.1	9.0	7	5–292206–7	2–292206–7	292206–7
0.40	3.0	11.5	9.6	7.5	6	5–292206–6	2–292206–6	292206–6
0.34	3.0	10.0	8.1	6.0	5	5–292206–5	2–292206–5	292206–5
0.29	3.0	8.5	6.6	4.5	4	5–292206–4	2–292206–4	292206–4
0.24	3.0	7.0	5.1	3.0	3	5–292206–3	2–292206–3	292206–3
0.19	3.0	5.5	3.6	1.5	2	5–292206–2	2–292206–2	292206–2

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± –
2 PLC ± –
3 PLC ± –
4 PLC ± –
ANGLES ± –

MATERIAL: SEE NOTE 1

FINISH: SEE NOTE 1

DWN Tommy Qian 07NOV2018
CHK Wenke He 07NOV2018
APVD Wenke He 07NOV2018
PRODUCT SPEC 108–60018
APPLICATION SPEC 114–5223
WEIGHT 0.000000
CUSTOMER DRAWING

TE Connectivity

NAME
AMP Mini CT Connector 1.5mm Pitch
Single Row HDR Ass'y (H) DIP Staggered Type
with Kink

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C–292206	—

SCALE NON SHEET 2 OF 2 REV B2