
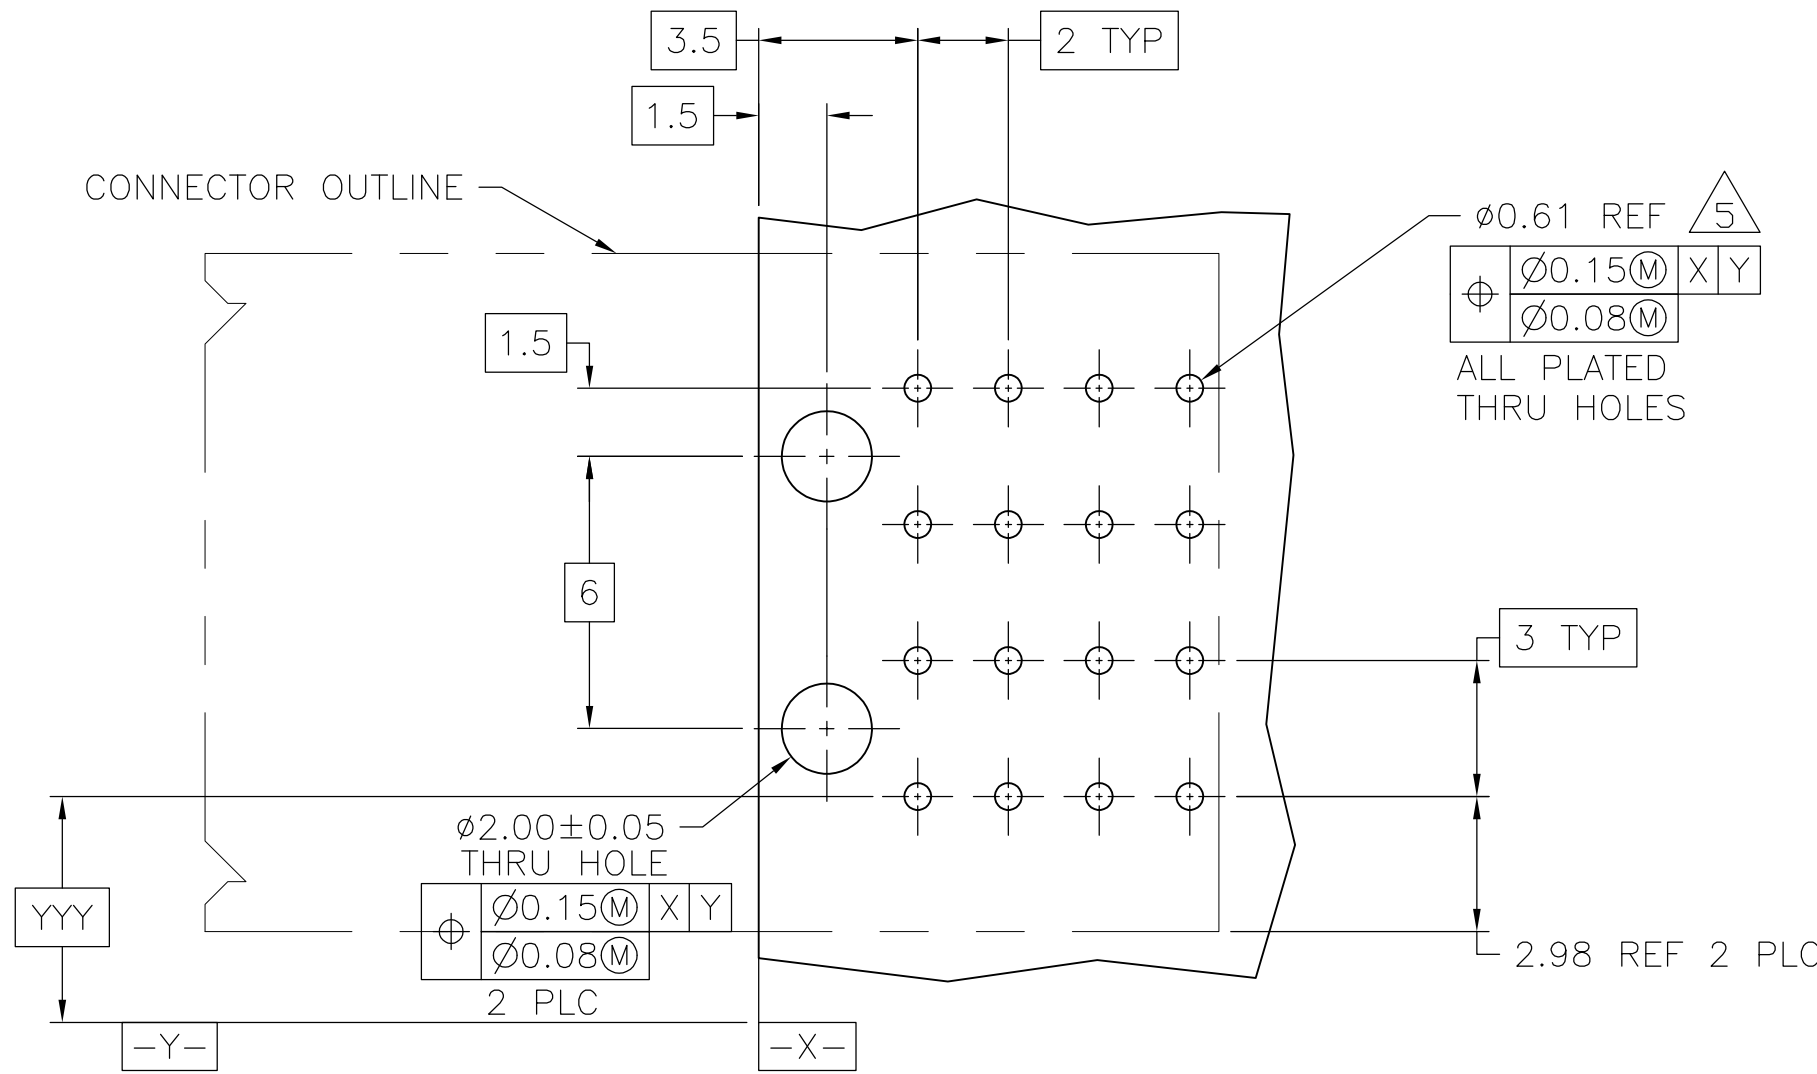
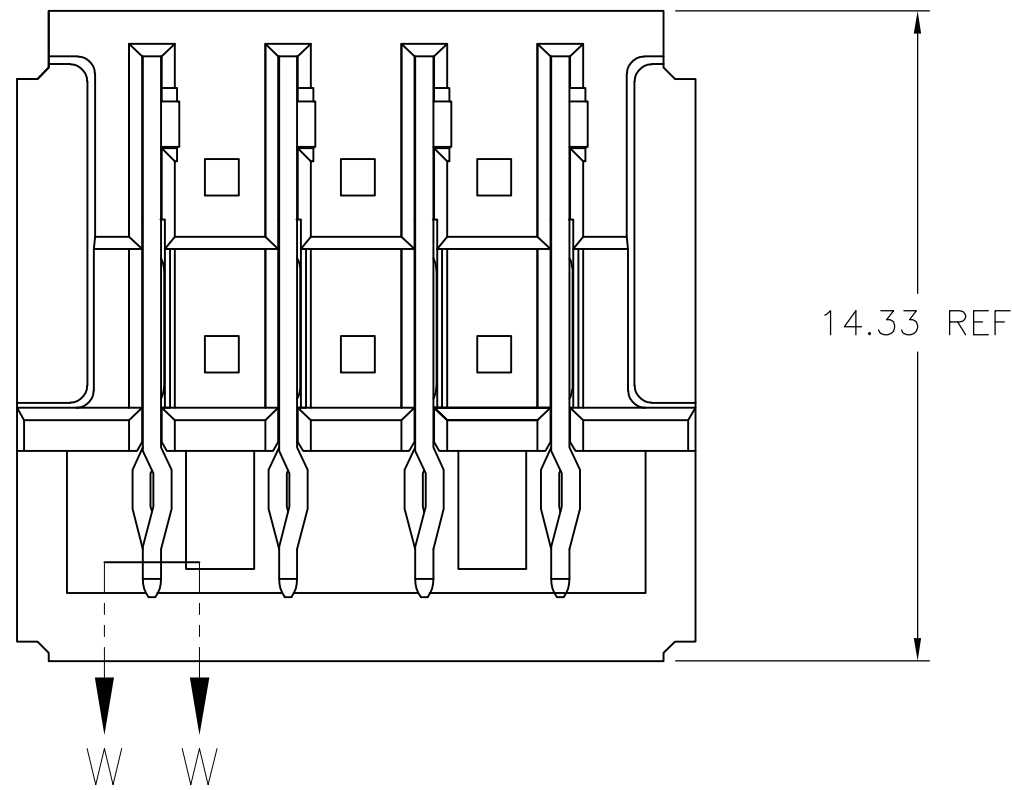
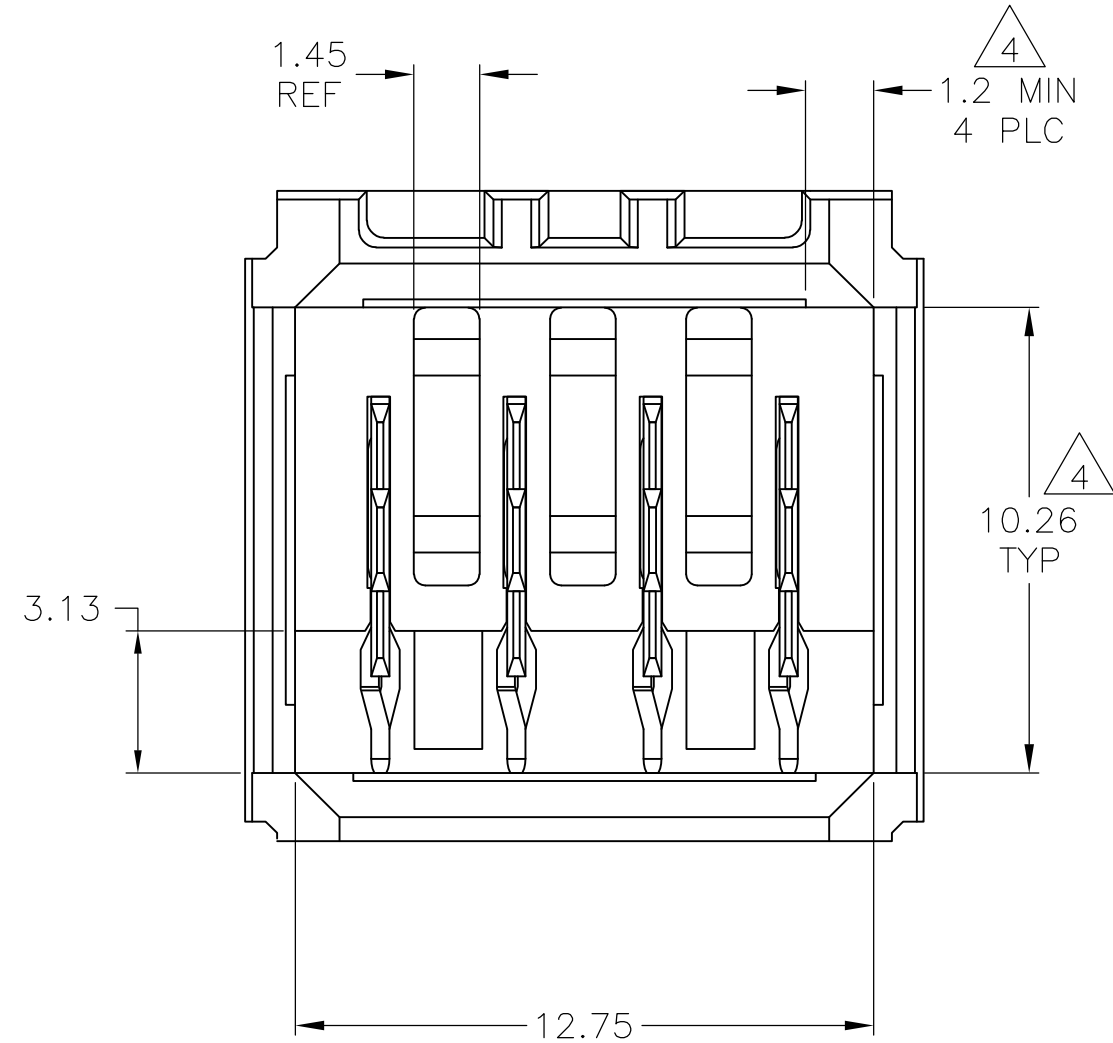
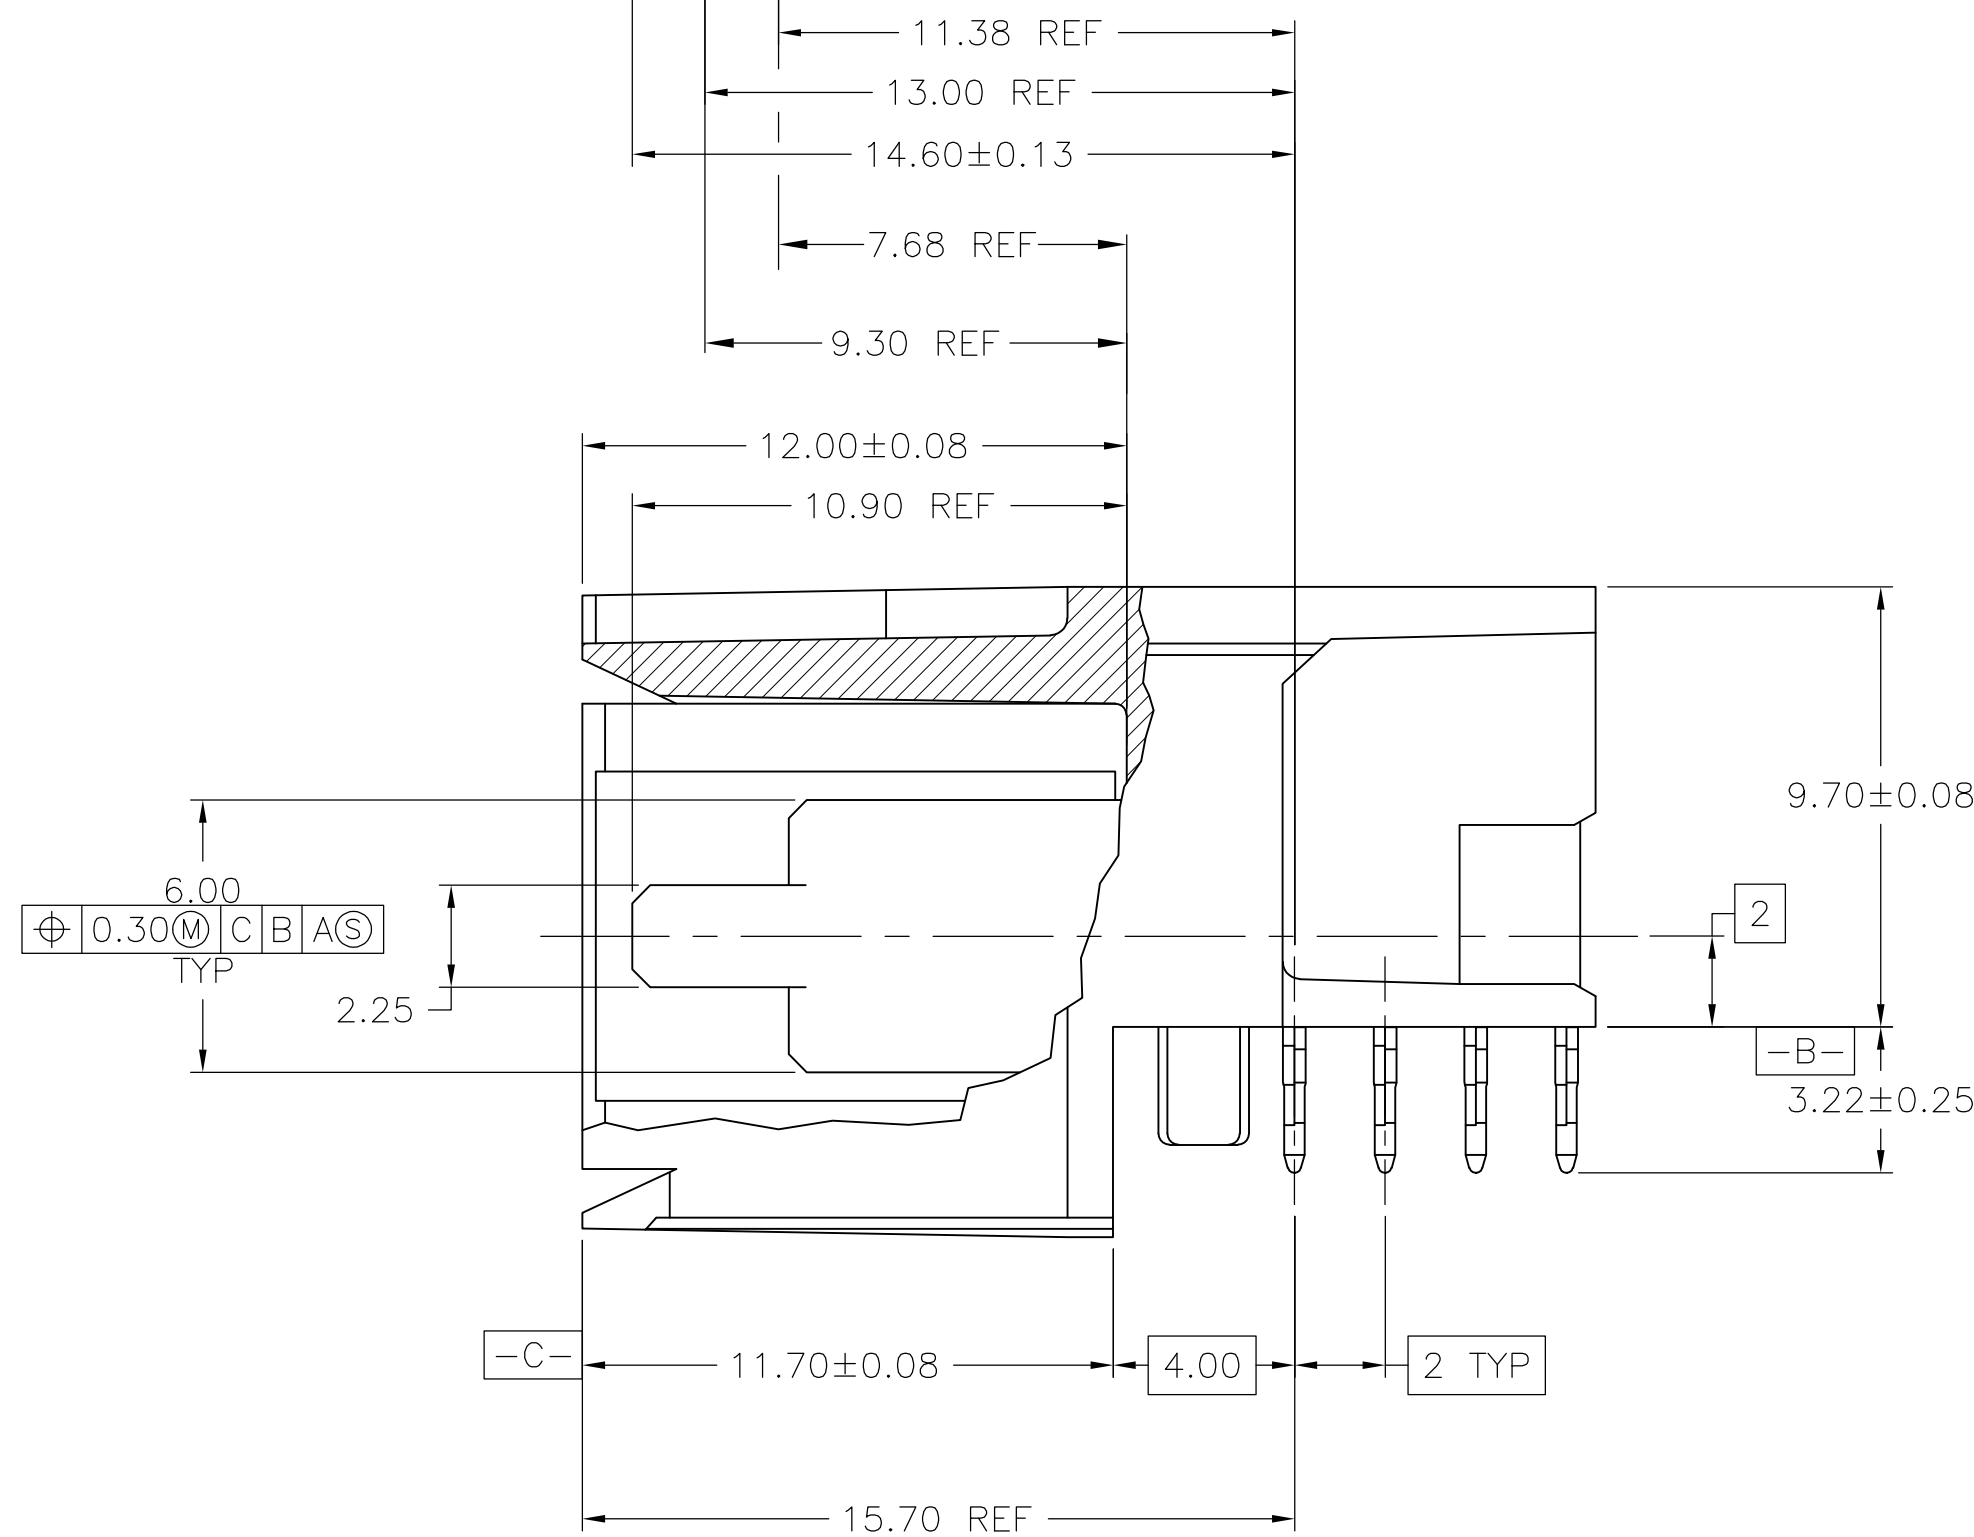


LOC		DIST		REVISIONS				
AD	00	P	LTR	DESCRIPTION		DATE	DWN	APVD
		B		REVISED PER ECO-11-000045		04JAN11	DH	DY

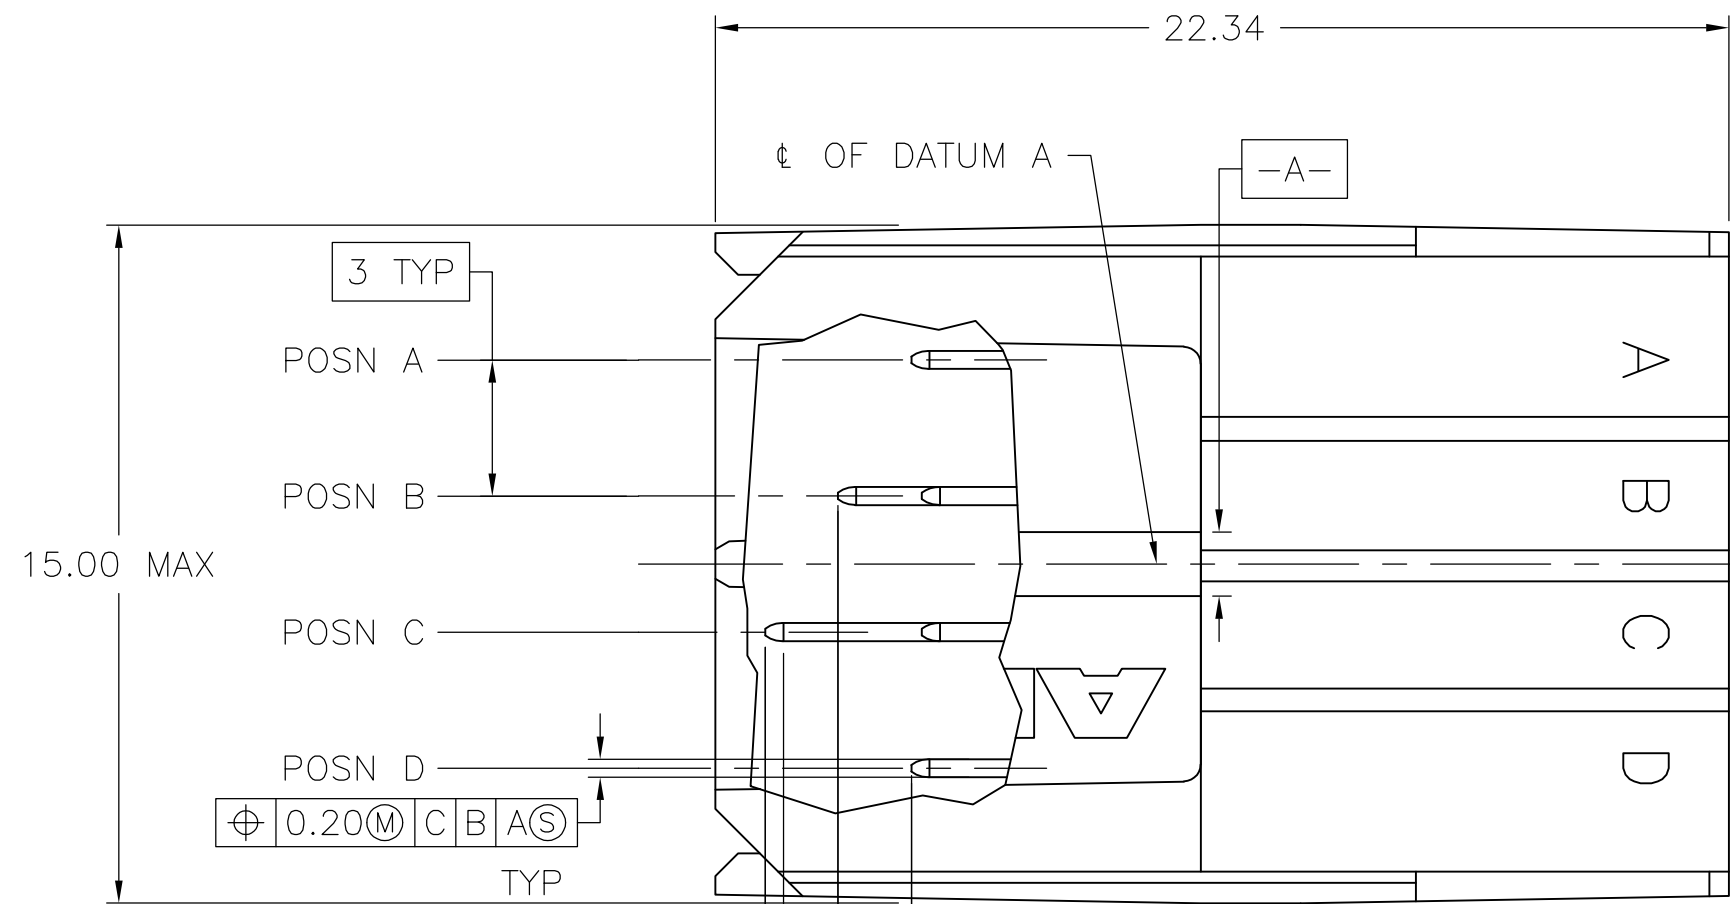

- 1

MATERIAL: HOUSING: POLYESTER, GRAY. UL 94V-0.
CONTACT: HIGH CURRENT COPPER ALLOY.
- 2


FINISH: CONTACT MATING AREA: 1.27µm MIN GOLD OR 0.08µm MIN GOLD OVER
0.76µm MIN PALLADIUM-NICKEL.
ACTION PIN AREA: 0.54µm MIN TIN LEAD PLATE,
ALL OVER 1.27µm MIN NICKEL UNDERPLATE.
- 3

FINISH: CONTACT LUBRICATION WITH BELLCORE APPROVED
LUBRICANT. TECHNICAL REFERENCE: TR-NWT-001217
ISSUE 1, SEPT 1992.
- 4

THE 10.26±0.13 DIMENSION APPLIES IN THIS AREA.
- 5

REFERENCE APPLICATION SPEC 114-1103 FOR RECOMMENDED
PLATED THRU HOLE DIAMETER AND PLATING THICKNESSES.
- 6

CURRENT RATING 16A/CONTACT PER PRODUCT SPEC 108-1651.

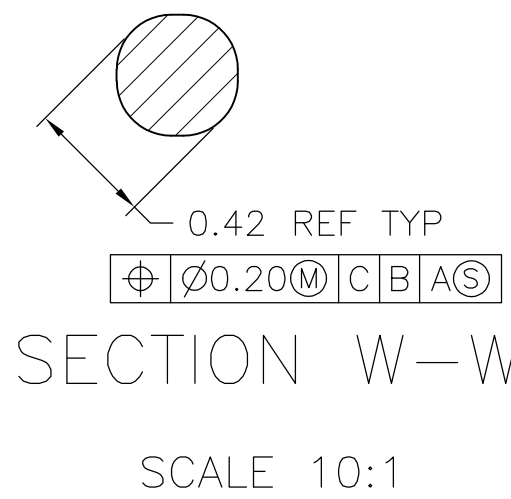

C,D	A,B	-	4	1645501-1
POSITIONS LOADED WITH 10.90 REF CONTACTS	POSITIONS LOADED WITH 9.30 REF CONTACTS	POSITIONS LOADED WITH 7.68 REF CONTACTS	NO OF LOADED POSITIONS	PART NUMBER
THIS DRAWING IS A CONTROLLED DOCUMENT.				
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		0 PLC ± - 1 PLC ± - 2 PLC ± 0.13 3 PLC ± - 4 PLC ± - ANGLES ± -
MATERIAL		FINISH		2 3
WEIGHT		SIZE		A1 00779
CUSTOMER DRAWING		SCALE		6:1
SHEET		OF		1
REV		B		