
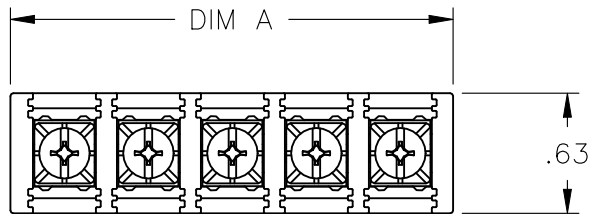
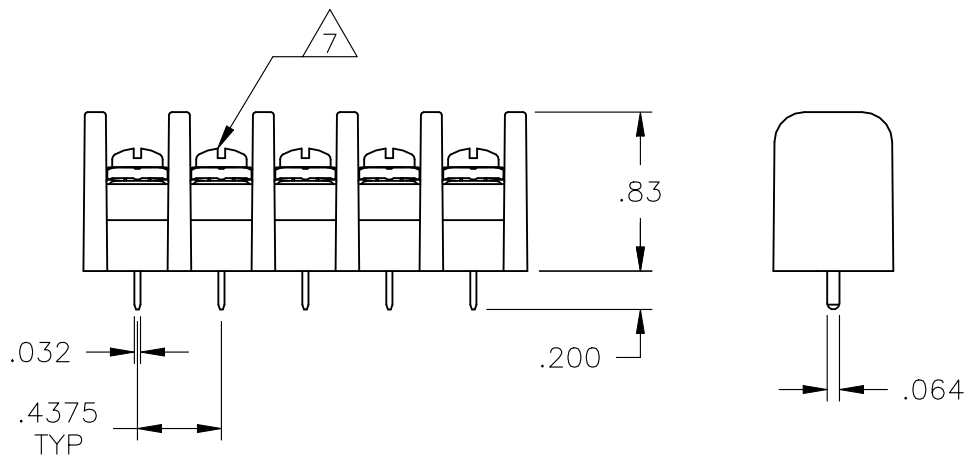


REVISIONS									
P	LTR	DESCRIPTION				DATE	DWN	APVD	
	R1	OBSOLETING THE PN 1437416-8				29SEP2023	SP	PS	
1	4	11.937	27	SSB7FP270202		2-1546984-7			
1	1	11.500	26	SSB7FP260202		5-1437416-4			
1	1	11.062	25	SSB7FP250202		5-1437416-3			
1	4	10.625	24	SSB7FP240202		2-1546984-4			
1	4	10.187	23	SSB7FP230202		2-1546984-3			
1	4	9.750	22	SSB7FP220202		2-1546984-2			
1	4	9.312	21	SSB7FP210202		2-1546984-1			
1	1	8.875	20	SSB7FP200202		5-1437416-2			
1	4	8.437	19	SSB7FP190202		1-1546984-9			
1	1	8.000	18	SSB7FP18020212		5-1437416-1			
1	4	8.000	18	SSB7FP180202		1-1546984-8			
1	1	7.562	17	SSB7FP170202		5-1437416-0			
1	4	7.125	16	SSB7FP160202		1-1546984-6			
1	1	6.687	15	SSB7FP150202		4-1437416-7			
1	1	6.250	14	SSB7FP140202		3-796602-3			
1	4	5.812	13	SSB7FP130202		1-1546984-3			
1	1	5.375	12	SSB7FP120202		4-1437416-1			
1	1	4.937	11	SSB7FP110202		1-1546561-2			
1	1	4.500	10	SSB7FP100202		3-1437416-5			
4	4	4.062	9	SSB7FP091402		2-1546984-9			
6	4	4.062	9	SSB7FP09140211		2-1546984-8			
1	1	4.062	9	SSB7FP090202		3-1437416-2			
1	1	3.625	8	SSB7FP080202		2-1437416-8			
1	1	3.187	7	SSB7FP070202		3-796602-2			
1	1	2.750	6	SSB7FP060202		2-1437416-2			
1	1	2.312	5	SSB7FP050202		1-1437416-7			
1	1	1.875	4	SSB7FP040202		1-1437416-2			
2	2	1.437	3	SSB7FP0320911		3-1546561-9			
1	5	1.437	3	SSB7FP03020211		1546561-6			
1	5	1.437	3	SSB7FP030202		1437416-8			
1	1	1.000	2	SSB7FP020202		1437416-4			
		DIM A	NO. OF POS.	CATALOG NUMBER		PART NUMBER			

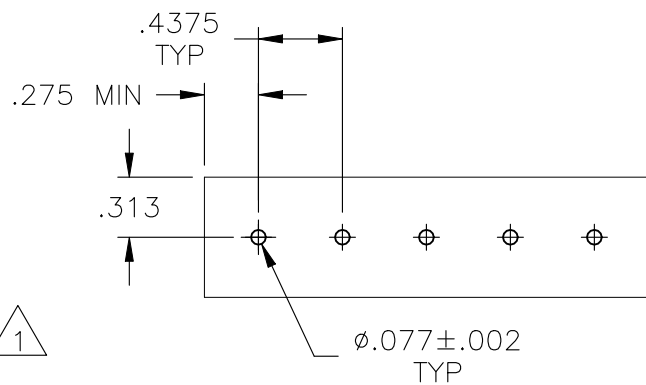


RECOMMENDED PCB LAYOUT


MATERIAL:
HOUSING: THERMOPLASTIC, UL94V-2, BLACK.
TERMINAL: BRASS, PLATED BRIGHT TIN OVER NICKEL.
SCREWS: 6-32, STEEL, ZINC AND CHROMATE PLATED 1
OR
NICKEL OVER COPPER PLATED 2


ELECTRICAL:
MAXIMUM CURRENT: 20A.
OPERATING VOLTAGE: 600V.
WIRE RANGE: 12 AWG MAX.
ENVIRONMENT:
OPERATING TEMP.: -60°C TO +105°C.

- 3 WHITE INK MARKING, APPROX. AS SHOWN. (SEE PAGE 2)
- 4 PRELIMINARY PART NUMBER.
- 5 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI
- 6 SPECIAL MARKING SEE DETAIL.
- 7 ALL SCREWS BOTTOMED, TORQUE 2 TO 4 IN-LBS

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S SCHLGEL CHK S YODER APVD S YODER PRODUCT SPEC — APPLICATION SPEC — WEIGHT —		16FEB04 2/16/04 2/16/04		<div>TE Connectivity Ltd.</div>					
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME SSB7 ASSEMBLY							
		0 PLC ± — 1 PLC ± — 2 PLC ± .02 3 PLC ± .010 4 PLC ± — ANGLES ± 1°									
MATERIAL —		FINISH —		SIZE A3		CAGE CODE 00779		DRAWING NO C-3-796602-2		RESTRICTED TO —	
CUSTOMER DRAWING						SCALE NTS		SHEET 1 OF 2		REV R1	

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	—	SEE SHEET 1	—	—	—

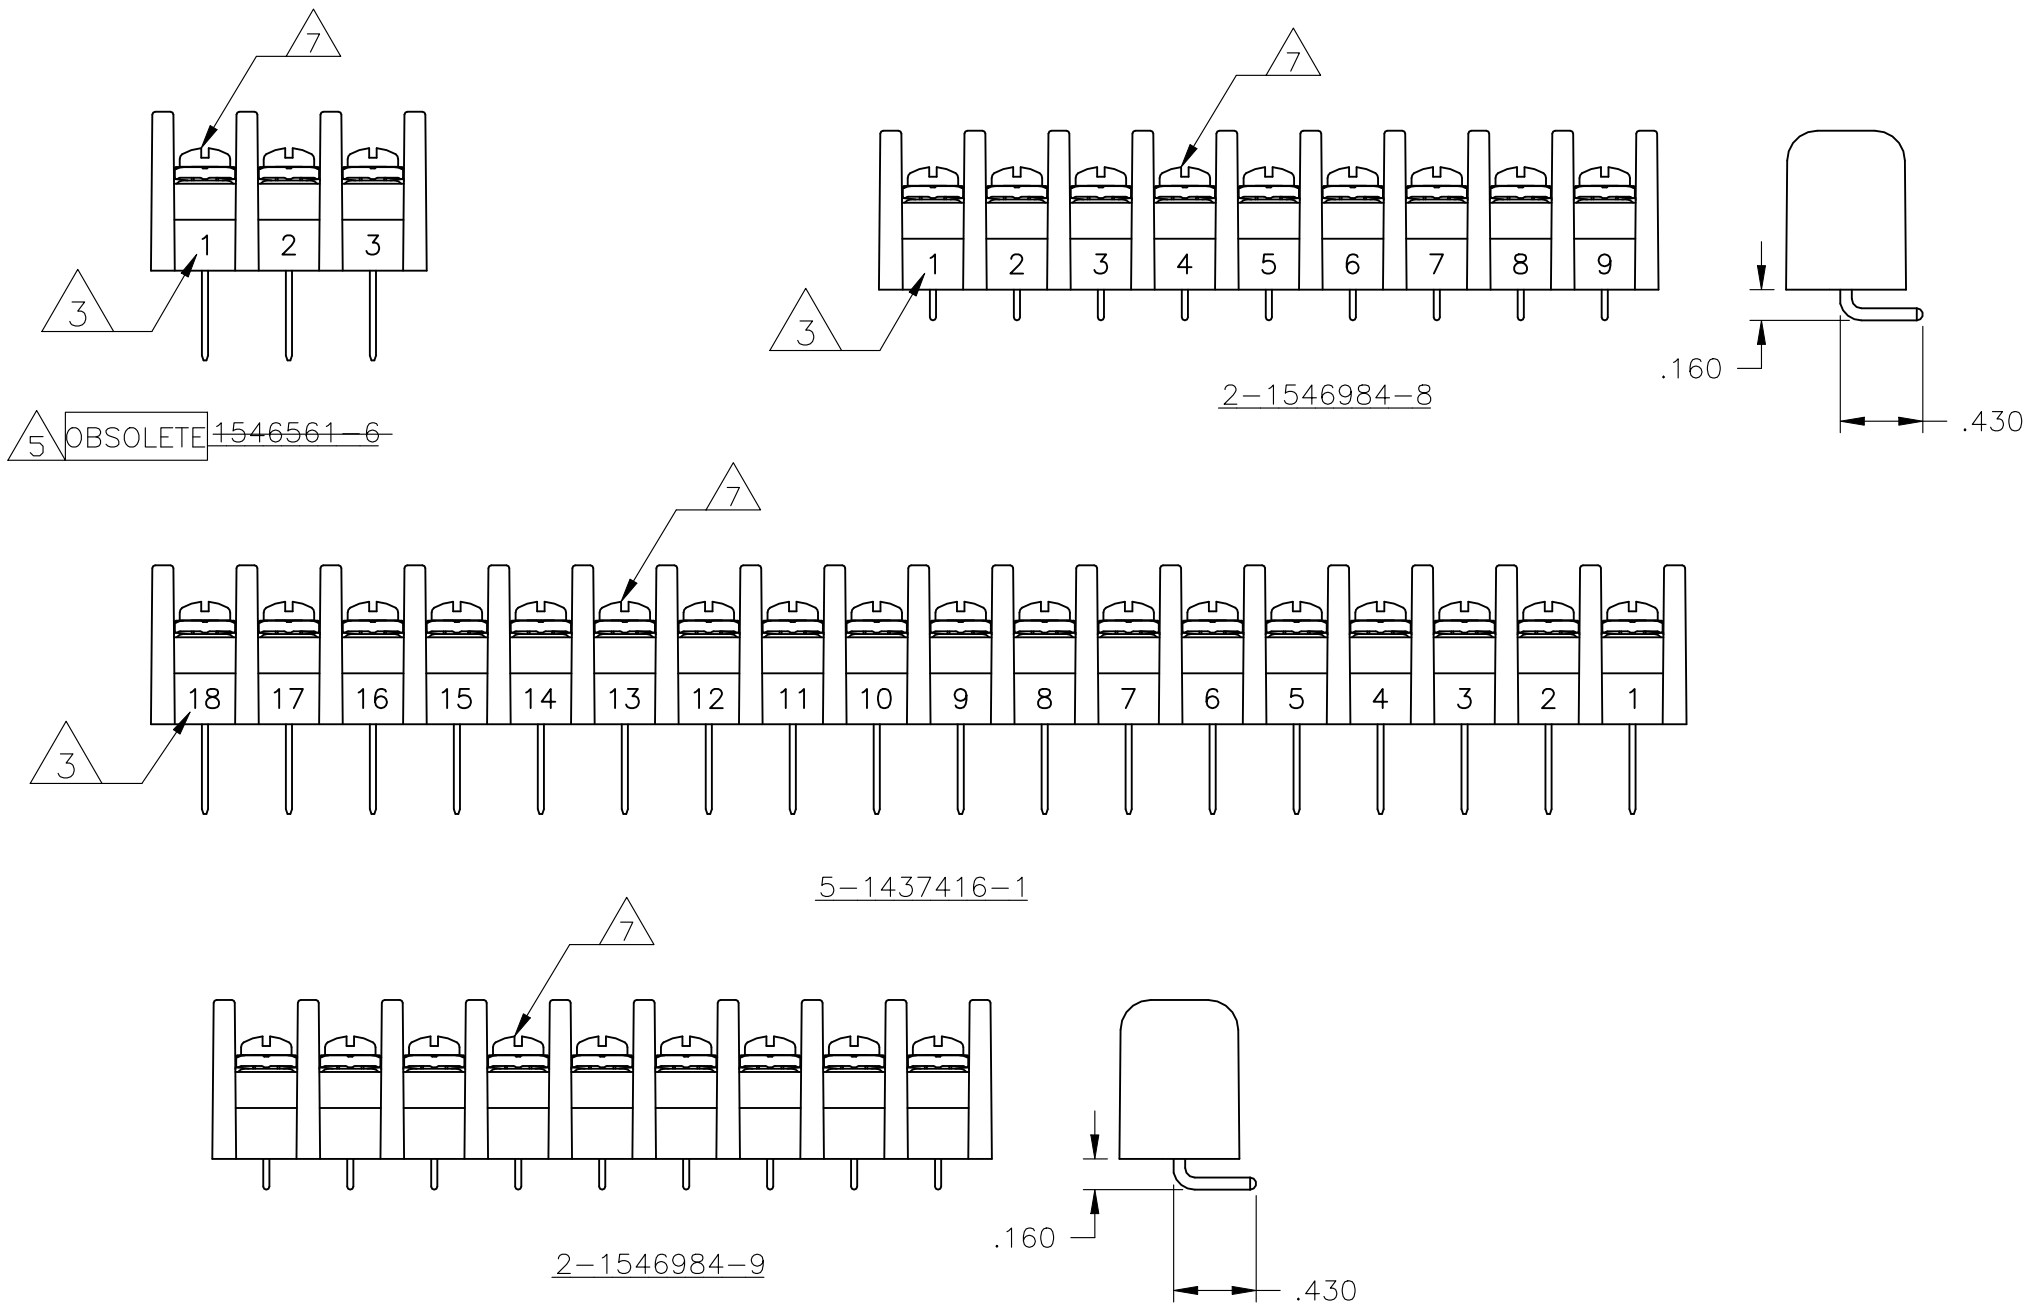

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S SCHLGEL 16FEB04		<div></div> TE Connectivity Ltd.							
		CHK S YODER 2/16/04									
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD S YODER 2/16/04		NAME					
		0 PLC ± — 1 PLC ± — 2 PLC ± .02 3 PLC ± .010 4 PLC ± — ANGLES ± 1°		PRODUCT SPEC —		SSB7 ASSEMBLY					
				APPLICATION SPEC —							
				WEIGHT —							
MATERIAL —		FINISH —		SIZE A3		CAGE CODE 00779		DRAWING NO C-3-796602-2		RESTRICTED TO —	
CUSTOMER DRAWING						SCALE NTS		SHEET 2 OF 2		REV R1	