
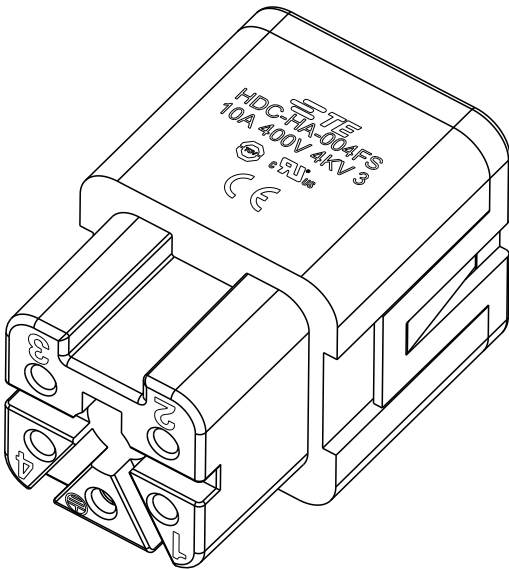
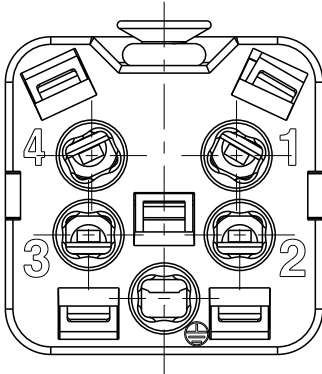
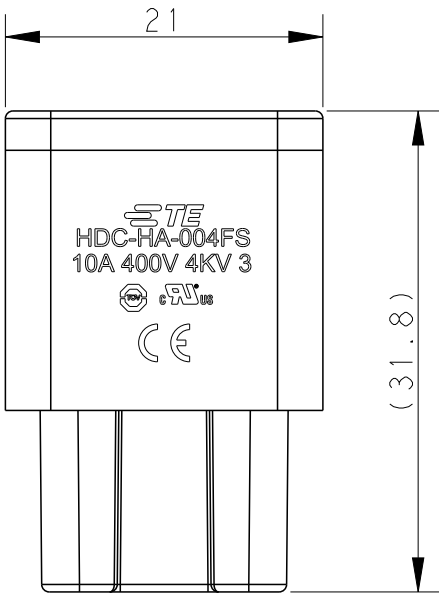


REVISIONS


P	LTR	DESCRIPTION	DATE	DWN	APVD
	B	ECR-15-013750	21SEP2015	DW	CW
	B1	ECR-15-016224	05NOV2015	DW	CW
	C	ECR-20-016101	09JUN2021	BS	CW
	D	ECR-25-246907	17JUN2025	ABS	RB

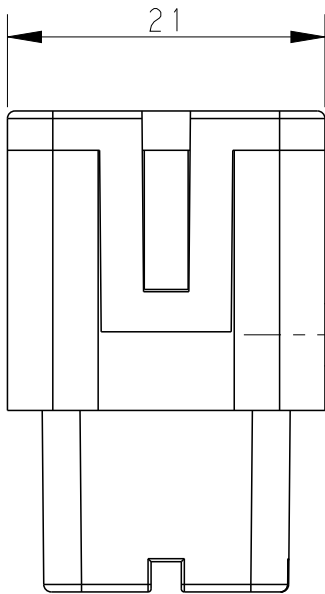


M3 SCREW,
RECOMMENDED
TIGHTENING
TORQUE 0.5Nm

NOTES:
1. TECHNICAL CHARACTERISTICS:
INSULATION MATERIAL: PC
RATED VOLTAGE: 400 V
RATED CURRENT: 10 A
INSULATION RESISTANCE: $\geq 400M\Omega$
RATED IMPULSE VOLTAGE: 4 KV
POLLUTION DEGREE: 3
FLAMMABILITY: UL94V-0
MATING CYCLES: 500 CYCLES
WIRE RANGE: 0.5-2.5 mm² (20-14 AWG)
CONTACT FINISH: SILVER PLATED
CONTACT TYPE: SPRING CONTACT

注释:
1. 技术参数:
绝缘材料: PC
额定电压: 400V
额定电流: 10A
绝缘电阻: $\geq 400M\Omega$
额定脉冲电压: 4 KV
污染等级: 3
阻燃等级: UL94V-0
插拔次数: 500 次
接线范围: 0.5-2.5 mm² (20-14 AWG)
端子表面处理: 镀银
接线类型: 弹片压接

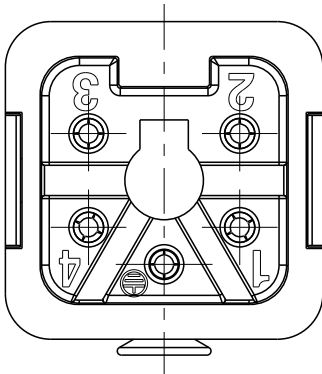

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN DAVID WANG 18DEC2014	<div> TE Connectivity</div>		
		CHK CHRIS WANG 18DEC2014			
		APVD XU XIANG 18DEC2014			
		PRODUCT SPEC 108-137045			
DIMENSIONS: mm		APPLICATION SPEC 114-137045	NAME HA-004-FS		
	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ± FINISH	WEIGHT -	SIZE A3	CAGE CODE 00779	DRAWING NO T2010043201000
		CUSTOMER DRAWING	SCALE 2:1	SHEET 1 OF 1	RESTRICTED TO - REV D