THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION –,– .
© COPYRIGHT – By – ALL RIGHTS RESERVED.


LOC	DIST
G	—


REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	B1	REDRAWN PER ECO-12-018518	24OCT12	KH	DR

1 MATERIAL: COPPER PER ASTM B152

2 FINISH: TIN PLATE PER ASTM B545

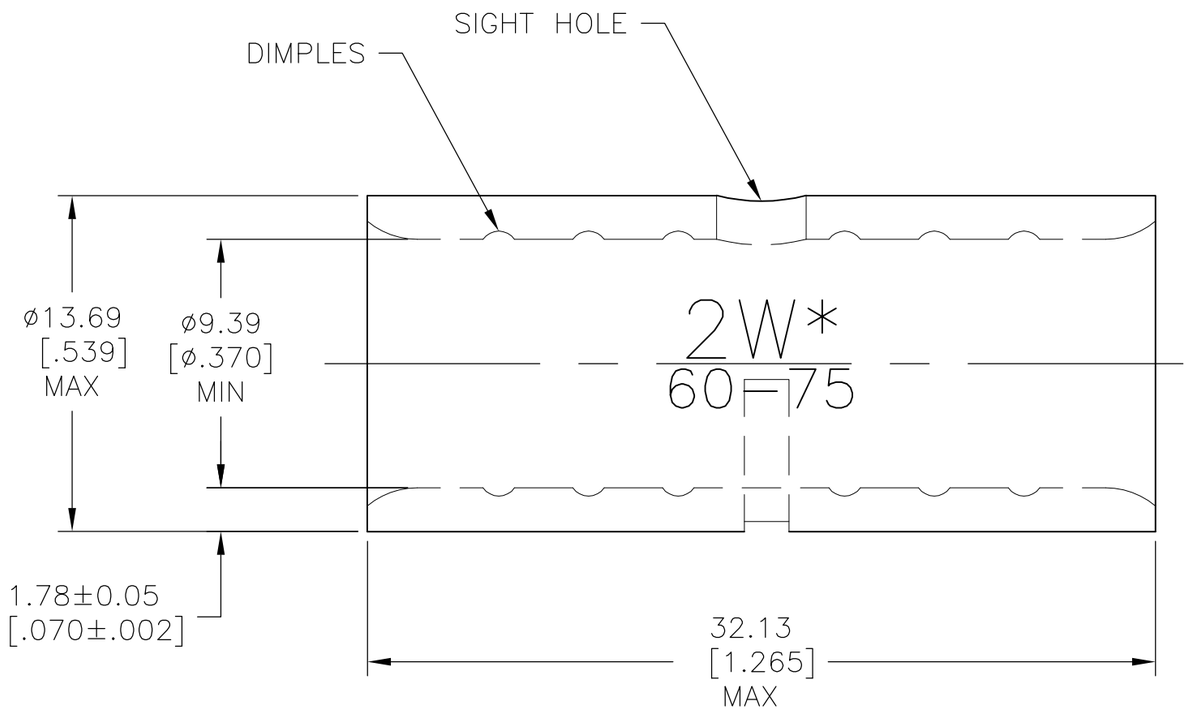

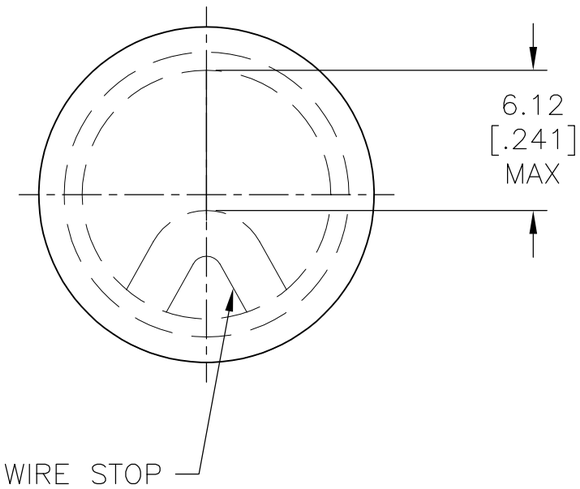

AMP INCORPORATED CUSTOMER SERVICE SYSTEMS

FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-6752
FOR APPLICATION TOOLING INFORMATION	TOOLING ASSISTANCE CENTER 1-800-722-1111
FOR ORDER ENTRY	1-800-526-5142

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.

MAX RECOMMENDED OPERATING TEMPERATURE: 170°C [338°F]

VOLTAGE RATING: N/A

WIRE: 26.7–42.4mm²[52,600–83,700]CIR MILLS SOLID OR STRANDED

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	± –
1 PLC	± –
2 PLC	± –
3 PLC	± –
4 PLC	± –
ANGLES	± –

MATERIAL 1 FINISH 2

DWN	KIRAN HOLAL	24OCT12
CHK	ROHDE DANIEL	24OCT12
APVD	ROHDE DANIEL	24OCT12
PRODUCT SPEC	—	
APPLICATION SPEC	—	
WEIGHT	—	

TE Connectivity

NAME: WIRE SPLICE, SOLISTRAND–BUTT
WIRE SIZE–2 AWG

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-322246	—

CUSTOMER DRAWING | SCALE 1:1 | SHEET 1 OF 1 | REV B1