


Model 2035
Miniature Double Banana Shorting Bar Plug



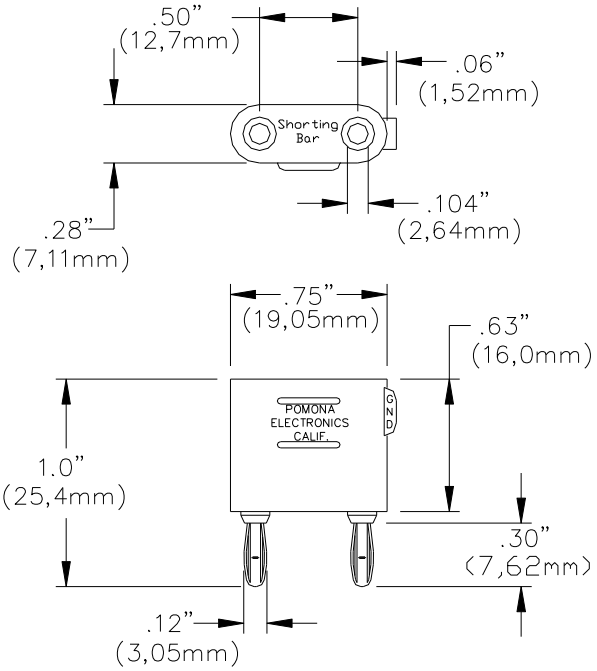



FEATURES:

- ✓ Provides a quick and easy means of shorting two inputs of a miniature double banana jack.
- ✓ The plug to plug and jack to jack dimension is .500" (12,70mm) which is typical for double miniature banana plugs/jacks.
- ✓ ABS body provides insulation protection to the user.
- ✓ Shorting adapter has double miniature jacks at the topside for stacking capability.

MATERIALS:

Miniature Double Banana Jack
Body: Gold Plated Brass
Miniature Double Banana Plug
Body: Gold Plated Brass
Spring: Gold Plated Beryllium Copper
Insulation: ABS molded to banana plug and jack bodies

RATINGS:

Operating Voltage: Hands free usage in controlled voltage environments: 2500 Vrms maximum. *For CE compliance*: not intended for hand-held use at voltages above 33 Vrms/70 Vdc.
Current: 5 Amperes
Operating Temperature: +122°F (+50°C) Max.

ORDERING INFORMATION:

Model 2035-0 (Black)
Model 2035-2 (Red)

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (,51 mm), .xxx = ± .005" (,127 mm).
All specifications are to the latest revisions. Specifications are subject to change without notice.
Registered trademarks are the property of their respective companies.

Sales: 800-490-2361 Fax: 888-403-3360 Technical Support: 800-241-2060 (technicalsupport@pomonatest.com)
For "Where to Buy" information, visit the Pomona web site at www.pomonaelectronics.com