


| LOC<br>J | DIST<br>/ | REVISIONS |     |             |           |     |      |
|----------|-----------|-----------|-----|-------------|-----------|-----|------|
|          |           | P         | LTR | DESCRIPTION | DATE      | DWN | APVD |
|          |           |           | F   | REVISED     | 24MAY2011 | M.M | N.Y  |
|          |           |           |     |             |           |     |      |
|          |           |           |     |             |           |     |      |
|          |           |           |     |             |           |     |      |





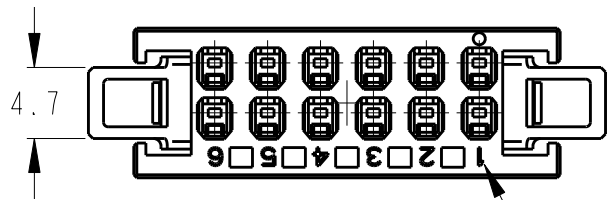


12POS(X-KEY)  
: 1-1871946-6  
1-2069575-6  
1-2069576-6

CIRCUIT NO

1. MATERIAL: GLASS FILLED THERMO PLASTIC  
POLYESTER(94V-0)


KEYING  
SERIES CODE  
LOGO MARK  
FOR 12, 22, 38 POS

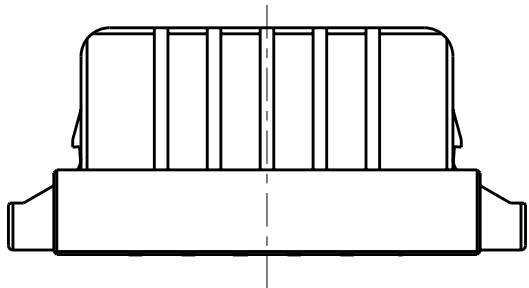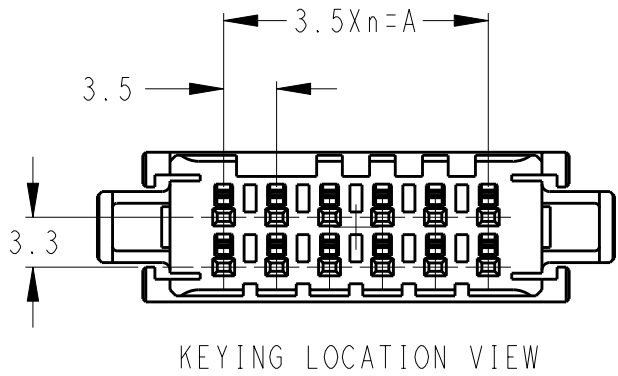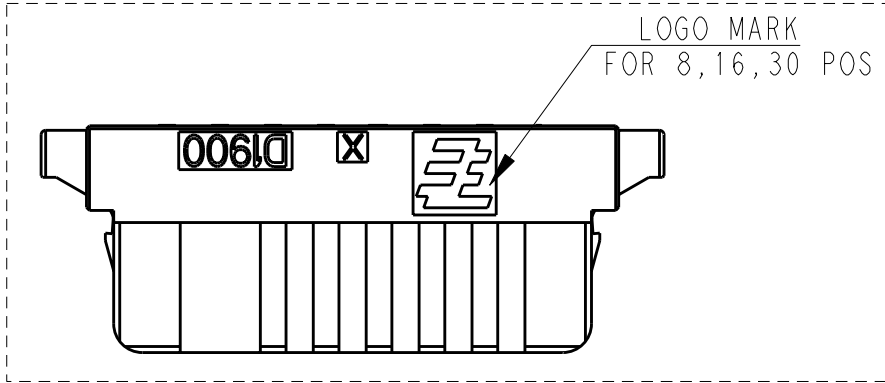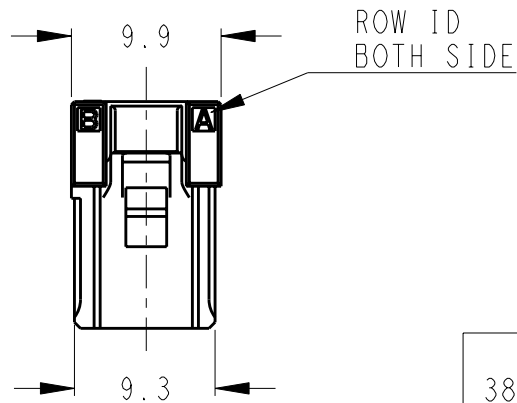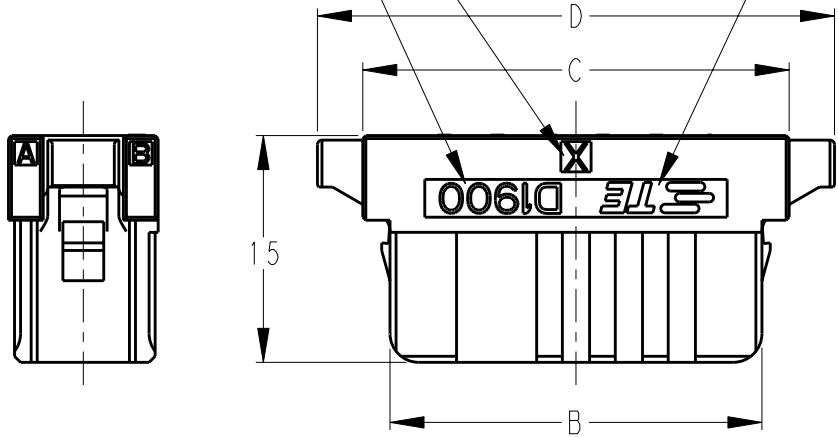

|     |    |      |      |      |      |              |                            |                                           |
|-----|----|------|------|------|------|--------------|----------------------------|-------------------------------------------|
| 38  | 18 | 63.0 | 70.1 | 73.7 | 79.7 |              | BLACK                      | 2-1871946-9                               |
| 30  | 14 | 49.0 | 56.1 | 59.7 | 65.7 |              | BLACK                      | 2-1871946-5                               |
| 22  | 10 | 35.0 | 42.1 | 45.7 | 51.7 |              | YELLOW<br>NATURAL<br>BLACK | 2-2069576-1<br>2-2069575-1<br>2-1871946-1 |
| 16  | 7  | 24.5 | 31.6 | 35.2 | 41.2 |              | BLACK                      | 1-1871946-8                               |
| 12  | 5  | 17.5 | 24.6 | 28.2 | 34.2 | AS SHOWN     | YELLOW<br>NATURAL<br>BLACK | 1-2069576-6<br>1-2069575-6<br>1-1871946-6 |
| 8   | 3  | 10.5 | 17.6 | 21.2 | 27.2 |              | YELLOW<br>BLACK            | 1-2069576-4<br>1-1871946-4                |
| POS | n  | A    | B    | C    | D    | KEY LOCATION | COLOR                      | PART NO                                   |

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:  
mm



MATERIAL



TOLERANCES UNLESS  
OTHERWISE SPECIFIED:  
 $\pm 0.3, \pm 5^\circ$

|        |       |
|--------|-------|
| 0 PLC  | $\pm$ |
| 1 PLC  | $\pm$ |
| 2 PLC  | $\pm$ |
| 3 PLC  | $\pm$ |
| 4 PLC  | $\pm$ |
| ANGLES | $\pm$ |

FINISH

|                  |             |
|------------------|-------------|
| DWN              | 09MAY2008   |
| CHK              | M. MAEBASHI |
| APVD             | 09MAY2008   |
| PRODUCT SPEC     | T. KUDO     |
| APPLICATION SPEC | S. MANABE   |
| 108-78268        |             |
| 114-5377         |             |
| WEIGHT           |             |

|           |  |
|-----------|--|
| 09MAY2008 |  |
| 09MAY2008 |  |
| 09MAY2008 |  |
| 108-78268 |  |
| 114-5377  |  |
|           |  |
|           |  |
|           |  |



TE Connectivity

NAME  
DYNAMIC D1900D 3.5mm PITCH  
REC HSG

|      |           |            |               |
|------|-----------|------------|---------------|
| SIZE | CAGE CODE | DRAWING NO | RESTRICTED TO |
| A3   | 00779     | C-1871946  |               |

CUSTOMER DRAWING

SCALE 2:1

SHEET 1 OF 1 REV F