


© 2020TE Connectivity. All Rights Reserved.

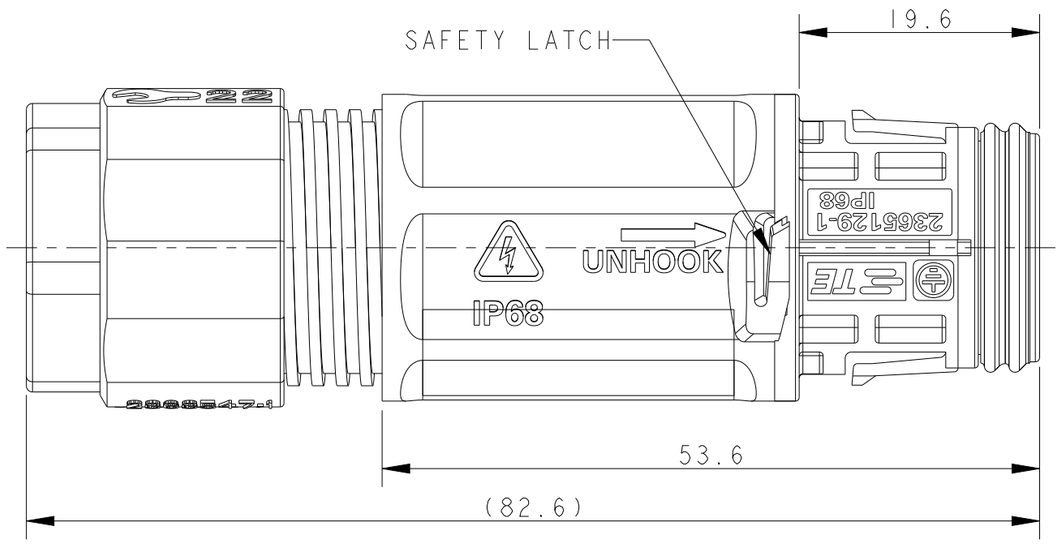


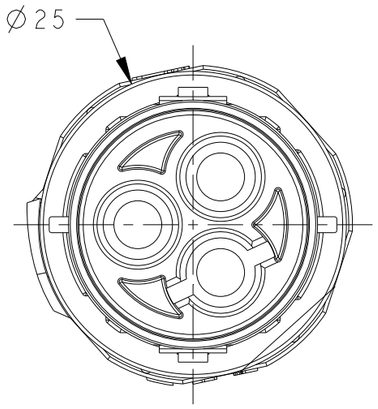

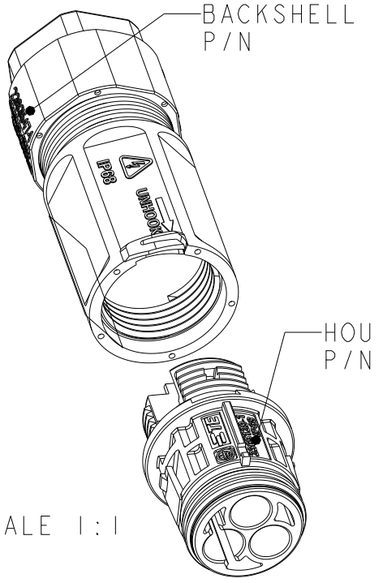


SCALE 1:1


POLARIZING KEY A
2379240-1
1-2379240-1




POLARIZING KEY B
2379240-2
1-2379240-2



BACKSHELL FOR
2379240-1
2379240-2



BACKSHELL FOR
1-2379240-1
1-2379240-2



REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	3	DRAFTING UPDATES	29OCT2020	SM	MZ
	A	PRODUCT UNDER TESTING	24NOV2020	SM	MZ
	A1	18AWG WIRE SIZE ADDED	27JAN2022	DM	SM
	A2	RELEASED	18MAR2022	SM	MZ

NOTES:

1. CONTACTS SUPPLIED SEPARATELY ON REELS, MUST PURCHASED ACCORDING TO WIRE SIZES. BELOW ARE THE CONTACT PART NUMBERS:

CONTACT P/N	WIRE SIZE
2359528-1	1.5mm² TO 2.5mm² 16AWG TO 14AWG
2359528-2	4.0mm² 12AWG
2359528-3	18AWG

2. MATERIALS:
   PLASTICS: PBT+PC ALLOY, UL-V0, UV-F1
   CONTACTS: COPPER ALLOY, TIN PLATED
   SCREWS : STAINLESS STEEL

3. OPERATING RATINGS :
   VOLTAGE (max): 600Vac Max
   CURRENT (max): 25A ON 4.0mm² & 20A ON 12AWG
   TEMPERATURE : -40°C TO 85°C
   IP RATING : IP67 & IP68

4. FOR ASSEMBLY INSTRUCTIONS, REFER APPLICATION SPECIFICATION 114-133123

5. PACKAGING: PPQ 200 pcs IN TRAY

BACKSHELL P/N	HOUSING ASSY P/N	POLARIZING KEY	CABLE RANGE	DESCRIPTION	PART NUMBER
2363547-2	2365129-2	KEY B	Ø7 - Ø10	IN-LINE PIN CONNECTOR	1-2379240-2
	2365129-1	KEY A			1-2379240-1
2363547-1	2365129-2	KEY B	Ø10.5 - Ø15		2379240-2
	2365129-1	KEY A			2379240-1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±0.2
1 PLC ±0.2
2 PLC ±0.1
3 PLC ±-
4 PLC ±-
ANGLES ±1°

MATERIAL: - / -

FINISH: - / -

DWN SUBHASH. M 28AUG2020
CHK M. ZUCCA 28AUG2020
APVD PETER.OTT 24NOV2020
PRODUCT SPEC 108-133123
APPLICATION SPEC 114-133123
WEIGHT -

TE Connectivity

NAME NECTOR T, 3Pos, PIN CONNECTOR CRIMP TYPE

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-2379240	-


CUSTOMER DRAWING | SCALE 2:1 | SHEET 1 OF 2 | REV A2

© 2020TE Connectivity. All Rights Reserved.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-


CRIMP TERMINATION

REFER 114-133123 FOR DETAILED INSTRUCTION
NOT TO SCALE

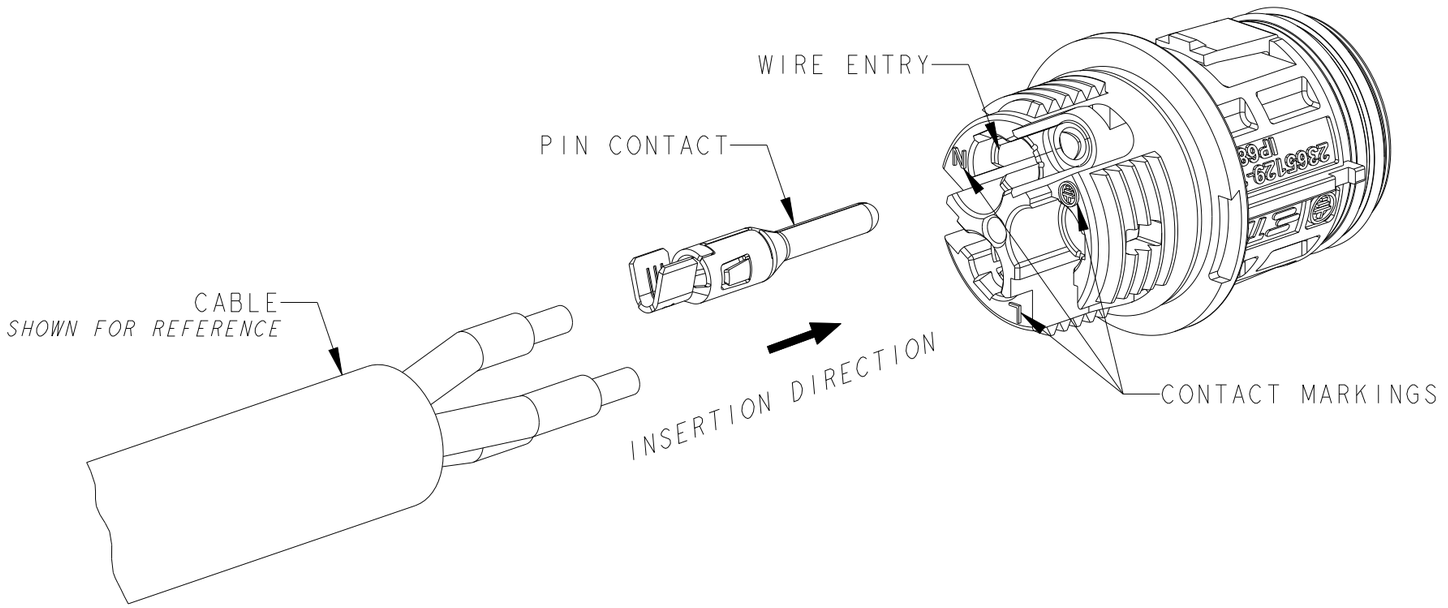

EXPLODED COMPONENTS

NOT TO SCALE

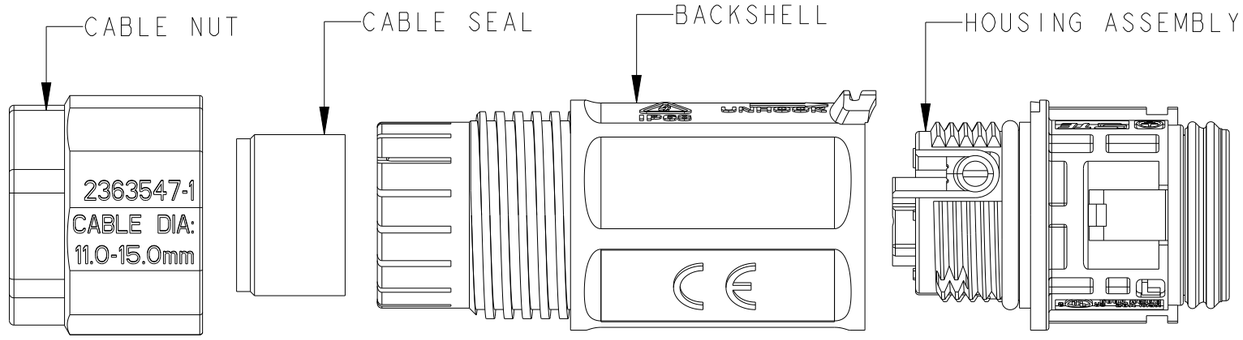

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±0.2; 1 PLC ±0.2; 2 PLC ±0.1; 3 PLC ±-; 4 PLC ±-; ANGLES ±1°
MATERIAL - -	FINISH - -

DWN	SUBHASH. M 28AUG2020
CHK	M. ZUCCA 28AUG2020
APVD	PETER.OTT 24NOV2020
PRODUCT SPEC	108-133123
APPLICATION SPEC	114-133123
WEIGHT	-

TE Connectivity

NAME: NECTOR T, 3Pos, PIN CONNECTOR CRIMP TYPE

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-2379240	-

CUSTOMER DRAWING	SCALE 2:1	SHEET 2 OF 2	REV A2