
used for: D-SUB

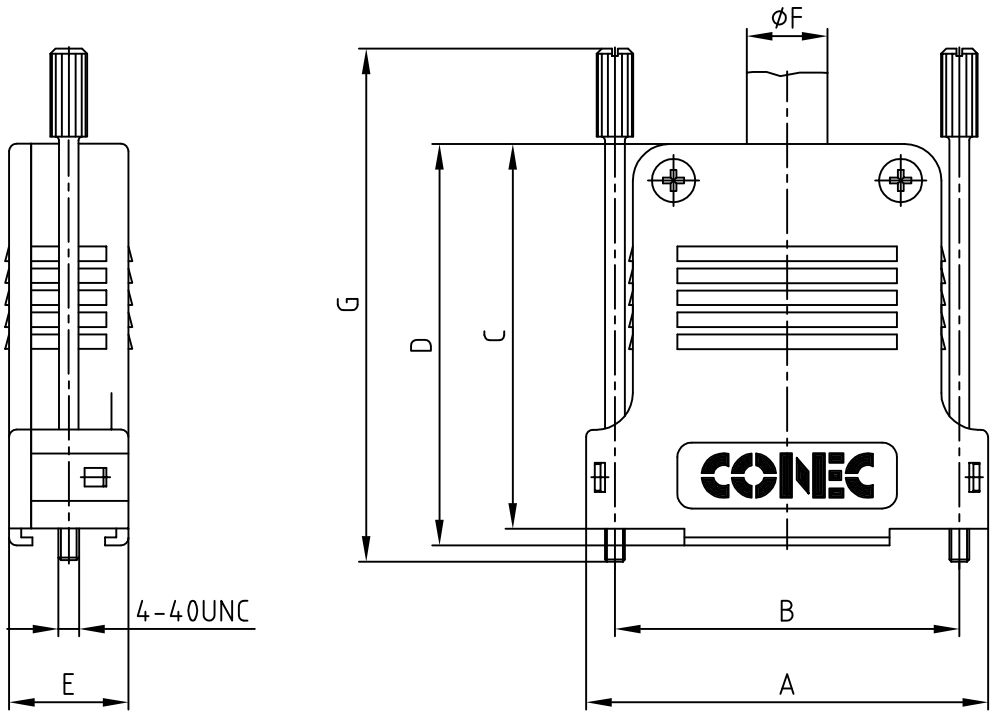

POS.	A	B	C	D	E	ØF	G	Part NO. Bulk package	Part NO. Single package
9	32.9	25.0	39.5	41.8	16.3	11.0	60.0	165X03309A	165X03309AE
15	41.2	33.3	45.5	47.8	16.3	11.0	60.0	165X03319A	165X03319AE
25	54.9	47.0	52.5	54.8	16.3	12.0	70.0	165X03329A	165X03329AE
37	71.4	63.5	55.0	57.8	18.7	15.0	70.0	165X03339A	165X03339AE
50	69.0	61.1	55.0	57.8	19.5	14.0	70.0	165X03349A	165X03349AE

(b)

APPROVAL * FREIGABE * DEBLOCAGE * AUTOR/ZACION * APPROVAL

CUSTOMER APPROVAL DATE:

NAME: TITLE:

COMPANY NAME:

APPROVAL * FREIGABE * DEBLOCAGE * AUTOR/ZACION * APPROVAL

NOTES:

(b) 1. MATERIAL: PBT UL 94 V-0; BLACK

(b) 2. TEMPERATURE RANGE: -40 °C TO +125 °C

3. JACK SCREWS: STEEL; NICKEL PLATED

(b) Directive 2002/95/EC RoHS compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH

DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name
4 x b	Ä5307	25.08.2014	E.Mick.
a	Original		

tolerance

dim. in mm

	date	name
2003		
drawn	04.08.	Lehmenkühler
appd.	04.08.	Mickenbecker
norm		
d-old		

scale: 1:1

material: SEE NOTES

title:

PLASTIC HOOD

9-50pos. BIG SPACE INSIDE

with straight cable exit and jack screws

dwg no: 16K1A993

AutoCAD 2000

DIN-A 4

sh: 1/1

part no: SEE TABLE