
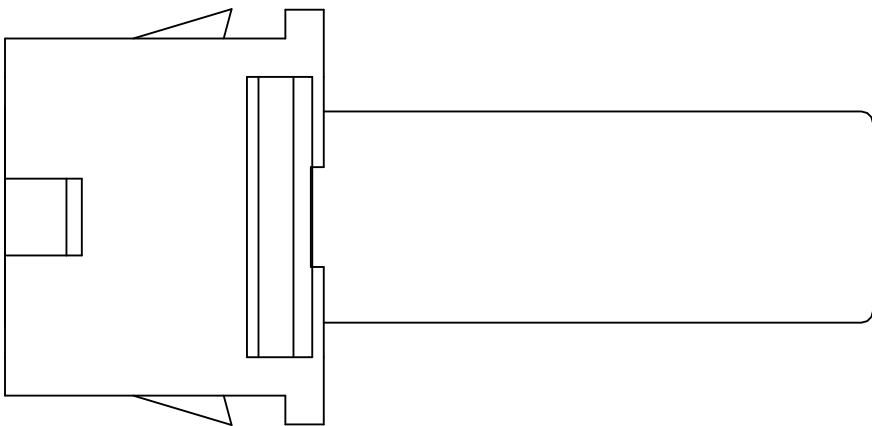
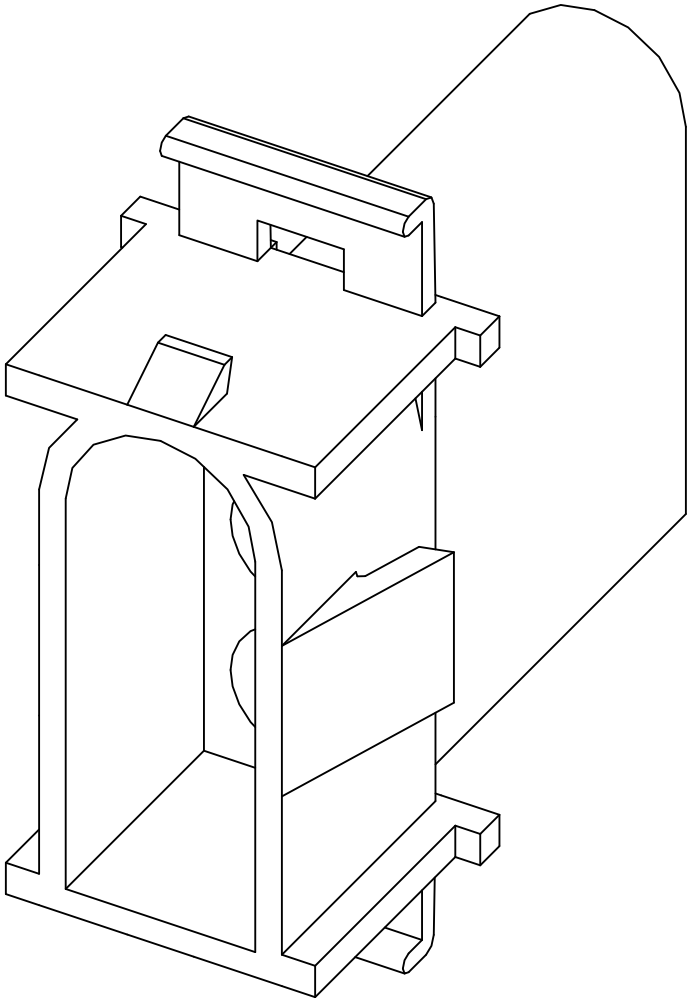
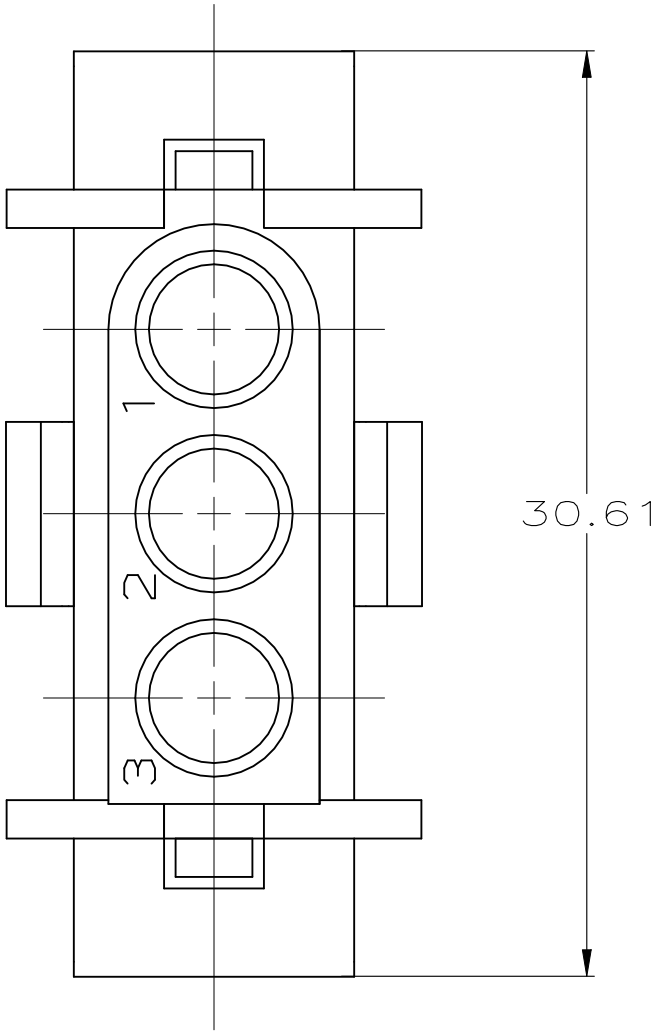
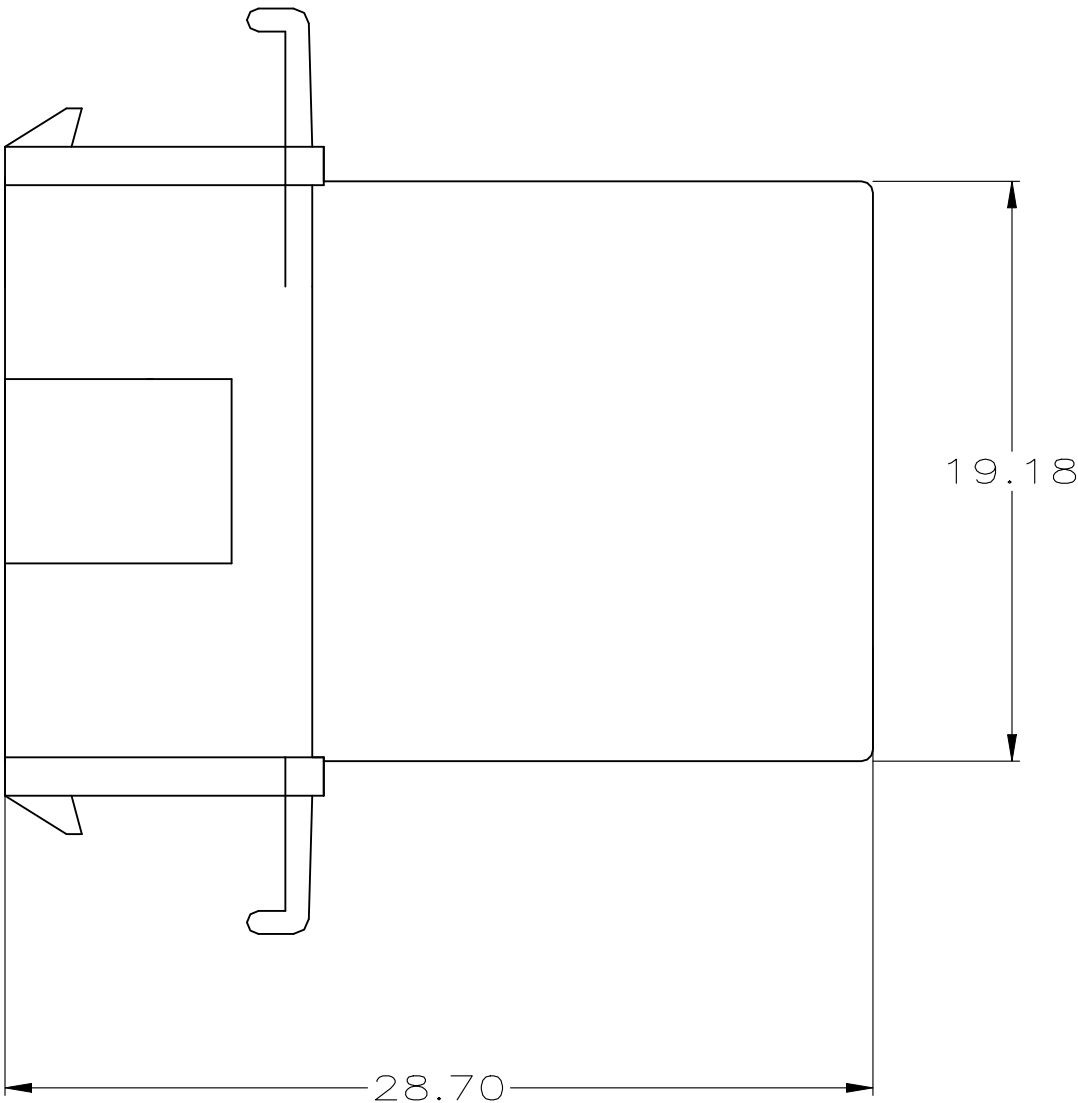


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	REVISED PER ECN-23-205457	28MAR2023	WLS	VS

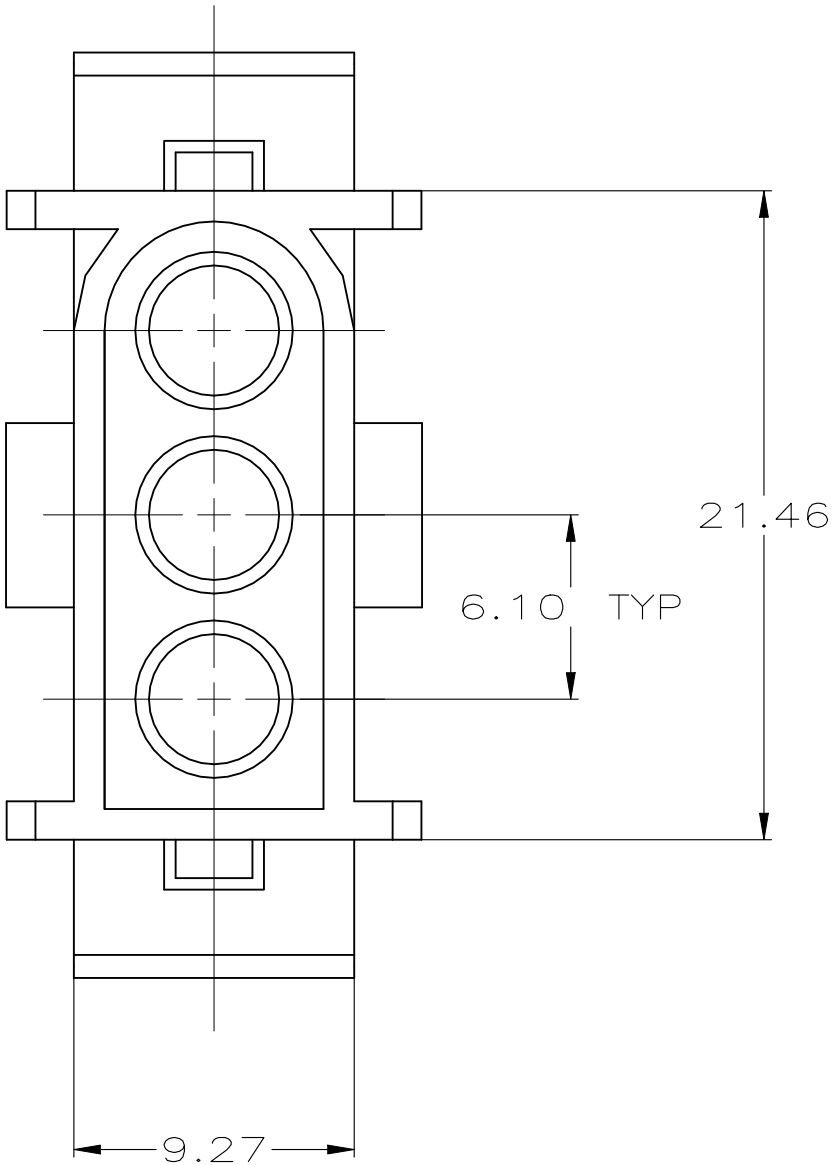


1. TO BE USED WITH .140 SERIES PINS.
2. TO BE USED WITH PLUG 794060.
- 3

 1.27 x 1.27 TABS IN CORNERS OF CUT-OUT ARE OPTIONAL TO REDUCE HOUSING FLOAT IN PANEL.

METRIC

3.56	.140	21.46	.845	—	—
1.65	.065	19.18	.755	—	—
1.27	.050	12.07	.475	30.61	1.205
0.76	.030	9.27	.365	28.70	1.130
0.13	.005	6.10	.240	24.51	.965
MM	IN	MM	IN	MM	IN

CONVERSION TABLE

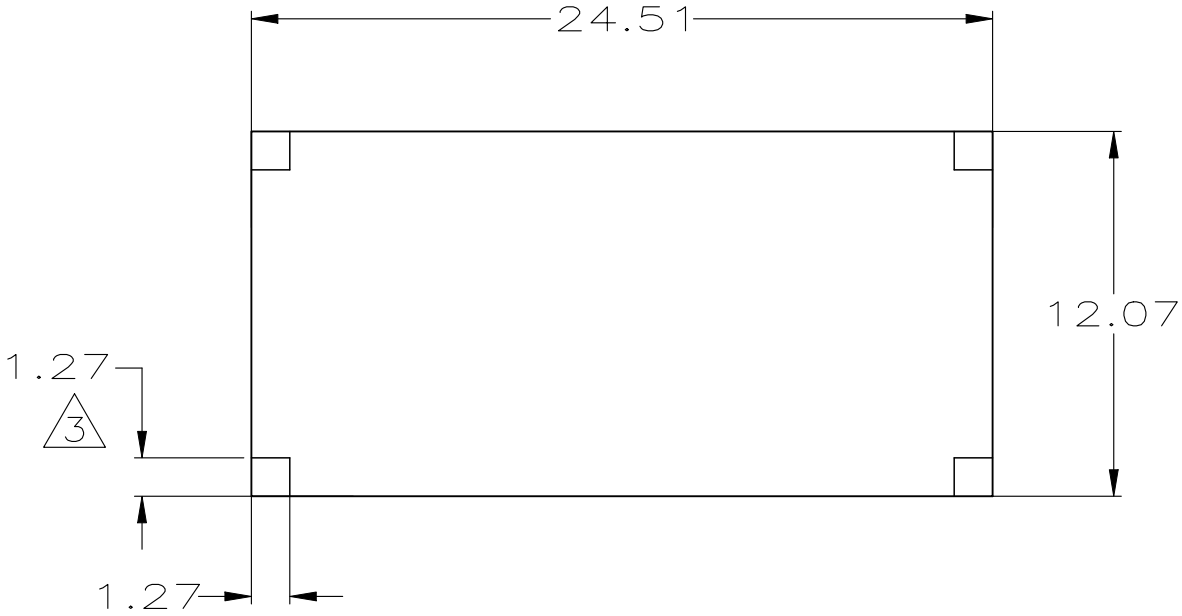

RECOMMENDED CUT OUT FOR
0.76 – 1.65 THICK PANEL

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. WHITAKER CHK R. SWING APVD C. MARTIN		4-18-95 4-18-95 4-25-95		NAME	
DIMENSIONS: mm		TOLERANCES, UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC 108-1032		APPLICATION SPEC	
MATERIAL SEE TABLE		FINISH —		WEIGHT —		SIZE A2	
						CAGE CODE 00779	
						DRAWING NO C-794061	
						RESTRICTED TO —	
						SCALE 4:1	
						SHEET 1 OF 1	
						REV A	