
Pomona®

Model 1166 & 6357 Kit Alligator Clip To Multi-Stacking Banana Plug Patch Cord

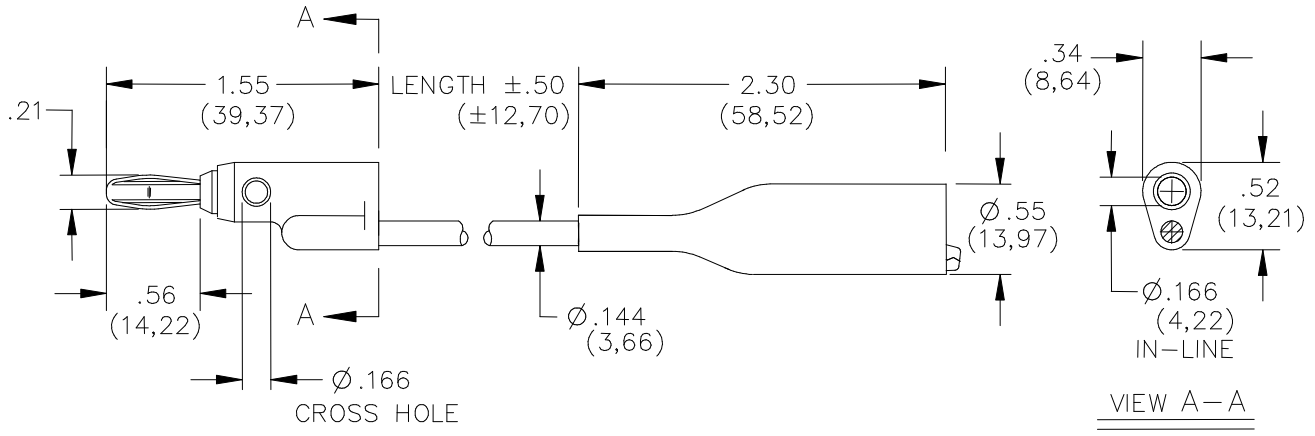

FEATURES:

- Pomona's Alligator Clip to Stacking Banana Plug Patch Cord offers quick attachment to terminals up to .300" O.D.
- The patch cord features a medium size alligator clip with a flex boot for insulation protection. The banana plug spring is Beryllium Copper for long insertion life.
- The banana plug has vertical and horizontal stacking capability.
- The wire conductor has a high number of strands for excellent wire flexibility.
- The banana plug is molded directly to the wire for added pull strength.

MATERIALS:

Insulated Alligator:
Body: Steel, Nickel Plated
Insulator Boot: Vinyl, Color matches wire color
Wire: 18 AWG, Stranding 65 x 36 t.c., PVC Insulated, 0.144" (3.66 mm) O.D.
Marking: Pomona 1166-XX-*
Body - Brass, Nickel Plated
Color: Referenced by Part Number
Banana Plug:
Spring - Beryllium Copper, Nickel Plated
Insulation: Polypropylene Molded to the Plug Body and Wire. Color Matches Color of Wire.

RATINGS:

Operating Temperature: +50°C Max.
Operating Voltage: Hand-held testing: 30VAC/ .30 VAC Max.
Hands Free Testing in controlled voltage environments: 150 WVDC
Current: 5 Amperes

ORDERING INFORMATION: Model 1166-XX-*
XX = Wire Length, Standard Lengths:12" (30.48cm), 24" (60.96cm), 36" (91.44cm), 48" (121.92cm) & 60" (152,4cm).
Additional lengths and colors can be quoted upon request.
* = Colors, -0 Black, -2 Red
Ordering Example: 1166-12-2, Patch cord is 12" (30.48cm), color is red.
6357-XX Kit contains 10 patch cords, one each of 10 colors.

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (,51 mm), .xxx = ± .005" (,127 mm).
All specifications are to the latest revisions. Specifications are subject to change without notice.
Registered trademarks are the property of their respective companies. Made in USA

Sales: 800-490-2361 Fax: 425-446-5844
Technical Support: technicalsupport@pomonatest.com