
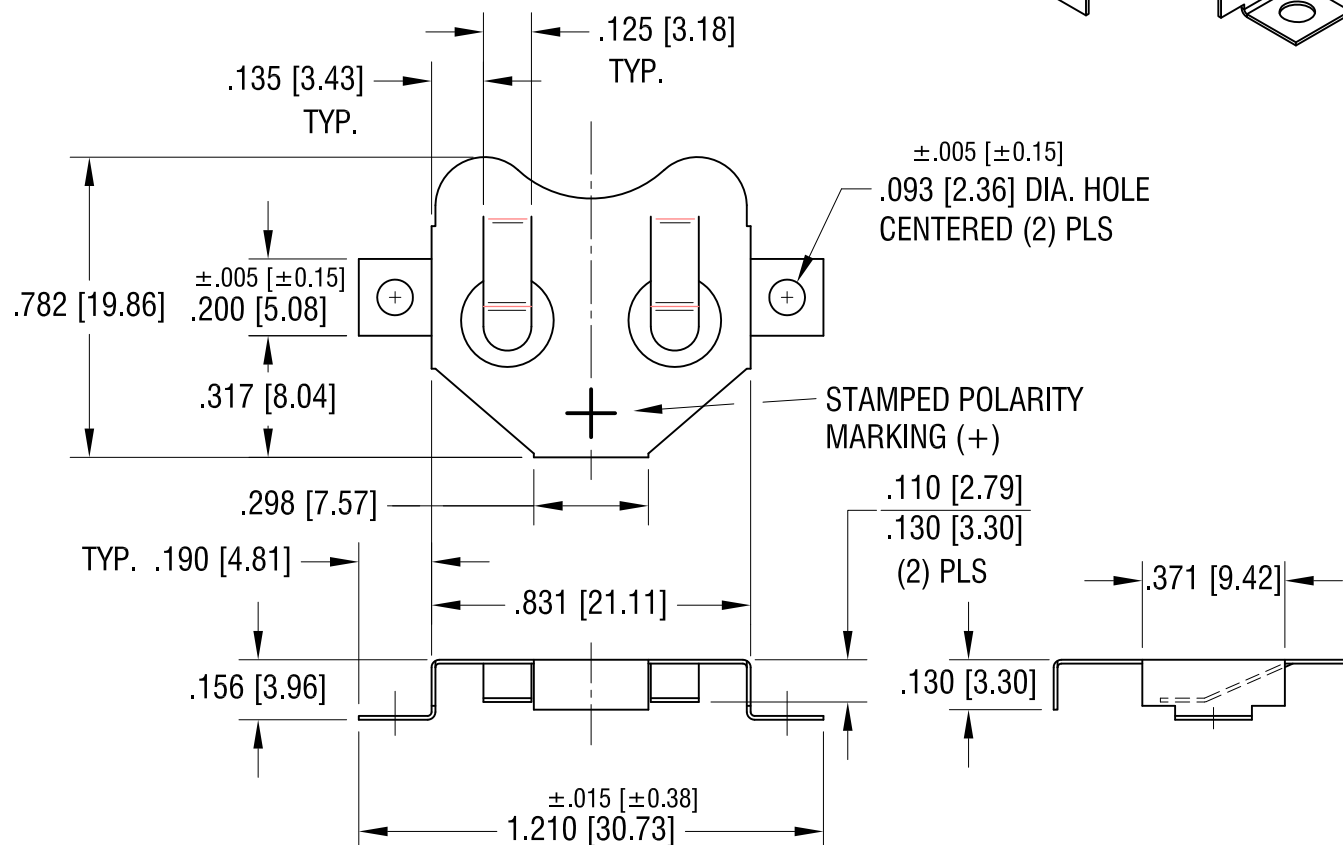


Diagram illustrating the Mounting Pad Layout. The layout shows three square pads connected by dashed lines. The dimensions and tolerances are as follows:

- Distance between the first and second pad:  $.200 [5.08] \text{ SQ. MIN.}$
- Distance between the second and third pad:  $.156 [3.96] \text{ SQ. MIN.}$  (labeled as NEG. CONTACT (PAD))
- Total distance between the first and third pad:  $1.210 [30.73] \text{ MIN.}$

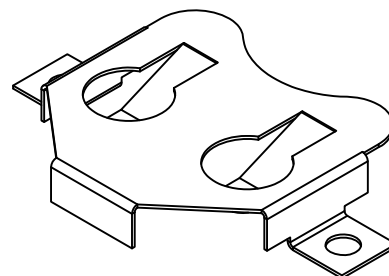

|                                                                                                              |  |  |              |                     |                 |
|--------------------------------------------------------------------------------------------------------------|--|--|--------------|---------------------|-----------------|
| <b>KEYSTONE ELECTRONICS CORP.</b>                                                                            |  |  |              |                     |                 |
| www.keyelco.com • ASTORIA, N.Y. 11105-2017 • Tel (718) 956-8900                                              |  |  |              |                     |                 |
| PART NAME<br>20mm SM COIN CELL CLIP                                                                          |  |  |              |                     |                 |
| MATERIAL<br>.010 [0.25] PHOSPHOR BRONZE                                                                      |  |  |              |                     |                 |
| FINISH<br><br>MATTE TIN PATE                                                                                 |  |  | DRN BY<br>NT |                     | DATE<br>4.07.09 |
|                                                                                                              |  |  | APP'D<br>LN  |                     | SCALE<br>2X     |
| TOLERANCES INCH [MM]<br>DECIMAL ± .005 [ $\pm 0.15$ ]<br>ANGULAR $\pm 1^\circ$<br>UNLESS OTHERWISE SPECIFIED |  |  | CODE<br>C    | DWG NO.<br><br>3082 |                 |