

# Power Supply Output Supervisory Circuit

## Description

This monolithic integrated circuit contains all the functions necessary to monitor and control the output of a sophisticated power supply system. Over-voltage (O.V.) sensing with provision to trigger an external SCR "crowbar" shutdown; an under-voltage (U.V.) circuit which can be used to monitor either the output or to sample the input line voltage; and a third op amp/comparator usable for current sensing (C.L.) are all included in this IC, together with an independent, accurate reference generator.

Both over and under-voltage sensing circuits can be externally programmed for minimum time duration of fault before triggering. All functions contain open collector outputs which can be used independently or wire-ORed together; and although the SCR trigger is directly connected only to the over-voltage sensing circuit, it may be optionally activated by any of the other outputs, or from an external signal. The O.V. circuit also includes an optional latch and external reset capability.

The current sense circuit may be used with external compensation as a linear amplifier or as a high gain comparator. Although nominally set for zero input offset, a fixed threshold may be added with an external resistor. Instead of current limiting, this circuit may also be used as an additional voltage monitor.

The reference generator circuit is internally trimmed to eliminate the need for external potentiometers and the entire circuit may be powered directly from either the output being monitored or from a separate bias voltage.


## Features

- Over-Voltage, Under-Voltage, and Current Sensing Circuits all included.
- Reference Voltage Trimmed to 1% Accuracy.
- SCR "Crowbar" Drive of 300mA.
- Programmable Time Delays.
- Open-Collector Outputs and Remote Activation Capability.
- Total Standby Current less than 10mA.

## High Reliability Features

- Available to MIL-STD-883, ¶ 1.2.1
- MSC-AMS level "S" Processing Available
- Available to DSCC
  - Standard Microcircuit Drawing (SMD)

## Block Diagram

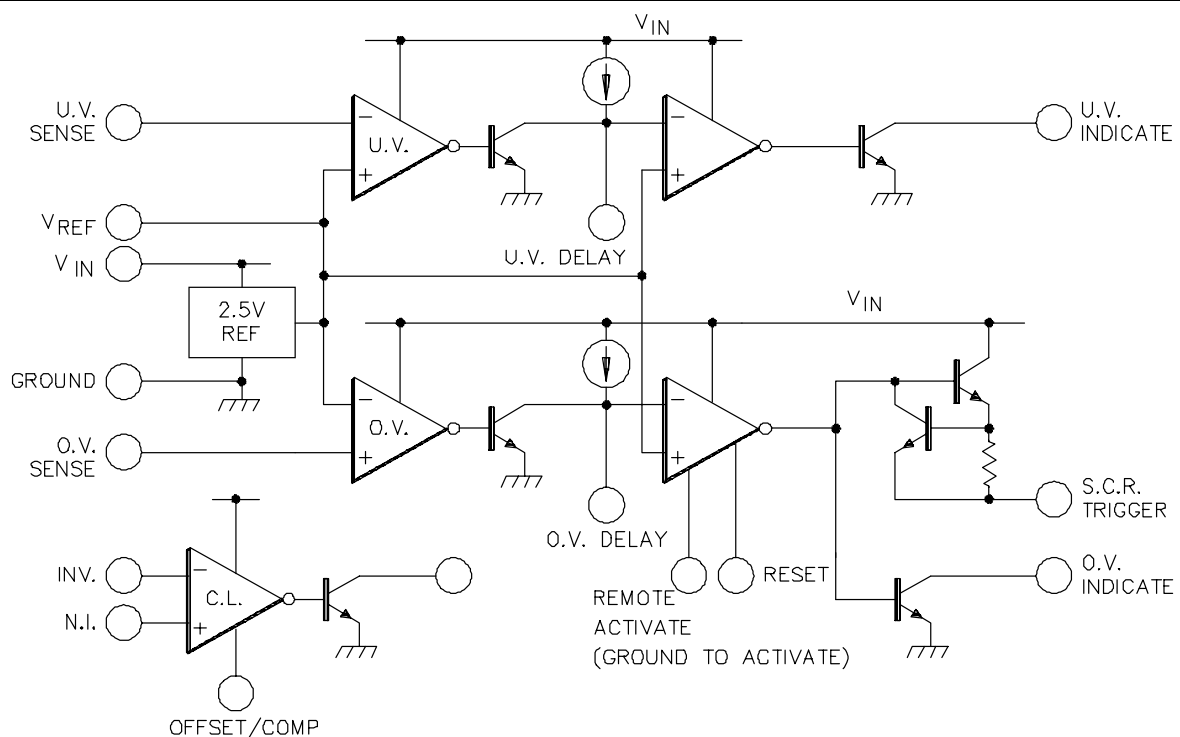

## Absolute Maximum Ratings (Note 1)

|                                               |                  |
|-----------------------------------------------|------------------|
| Input Supply Voltage (+V <sub>IN</sub> )..... | 40V              |
| Sense Inputs .....                            | +V <sub>IN</sub> |
| SCR Trigger Current (Note 2) .....            | 300mA            |
| Indicator Output Voltage .....                | 40V              |

Note 1. Values beyond which damage may occur.

Note 2. At higher input voltages, a dissipation limiting resistor, R<sub>G</sub> is required. See Figure 1.

|                                     |                |
|-------------------------------------|----------------|
| Indicator Output Sink Current ..... | 50mA           |
| Operating Junction Temperature      |                |
| Hermetic (J, L Packages) .....      | 150°C          |
| Plastic (N, DW Packages) .....      | 150°C          |
| Storage Temperature Range .....     | -65°C to 150°C |

RoHS Peak package Solder Reflow Temp. (40 sec. max. exp.)..... 260°C (+0, -5)

## Thermal Data

J Package:

|                                                             |        |
|-------------------------------------------------------------|--------|
| Thermal Resistance-Junction to Case, $\theta_{JC}$ .....    | 30°C/W |
| Thermal Resistance-Junction to Ambient, $\theta_{JA}$ ..... | 80°C/W |

N Package:

|                                                             |        |
|-------------------------------------------------------------|--------|
| Thermal Resistance-Junction to Case, $\theta_{JC}$ .....    | 40°C/W |
| Thermal Resistance-Junction to Ambient, $\theta_{JA}$ ..... | 65°C/W |

DW Package:

|                                                             |        |
|-------------------------------------------------------------|--------|
| Thermal Resistance-Junction to Case, $\theta_{JC}$ .....    | 40°C/W |
| Thermal Resistance-Junction to Ambient, $\theta_{JA}$ ..... | 95°C/W |

L Package:

|                                                             |         |
|-------------------------------------------------------------|---------|
| Thermal Resistance-Junction to Case, .....                  | 35°C/W  |
| Thermal Resistance-Junction to Ambient, $\theta_{JA}$ ..... | 120°C/W |

Note A. Junction Temperature Calculation:  $T_J = T_A + (P_D \times \theta_{JA})$ .

Note B. The above numbers for  $\theta_{JC}$  are maximums for the limiting thermal resistance of the package in a standard mounting configuration. The  $\theta_{JA}$  numbers are meant to be guidelines for the thermal performance of the device/pc-board system. All of the above assume no ambient airflow.

## Recommended Operating Conditions (Note 3)

|                                                |                            |
|------------------------------------------------|----------------------------|
| Input Supply Voltage (+V <sub>IN</sub> ) ..... | 4.7V to 40V                |
| Current Limit Common Mode                      |                            |
| Input Voltage Range .....                      | 0V to +V <sub>IN</sub> -3V |
| Reference Load Current .....                   | 0 to 10mA                  |
| Indicator Output Voltage .....                 | 4.7V to 40V                |
| Indicator Output Current .....                 | 0 to 10mA                  |

Note 3: Range over which the device is functional.

Note 4. Larger value capacitor may be used with peak current limiting. See Figure 7.

|                                       |                |
|---------------------------------------|----------------|
| Delay Timing Capacitor (Note 4) ..... | 0 to 1μF       |
| Operating Ambient Temperature Range   |                |
| SG1543 .....                          | -55°C to 125°C |
| SG2543 .....                          | -25°C to 85°C  |
| SG3543 .....                          | 0°C to 70°C    |

## Electrical Characteristics

(Unless otherwise specified, these specifications apply over the operating ambient temperatures for SG1543 with -55°C ≤ T<sub>A</sub> ≤ 125°C, SG2543 with -25°C ≤ T<sub>A</sub> ≤ 85°C, SG3543 with 0°C ≤ T<sub>A</sub> ≤ 70°C, and +V<sub>IN</sub> = 10V. Indicator outputs have 2kΩ pull-up resistor. Low duty cycle testing techniques are used which maintains junction and case temperatures equal to the ambient temperature.)

| Parameter             | Test Conditions                                             | SG1543/SG2543 |      |      | SG3543 |      |      | Units |
|-----------------------|-------------------------------------------------------------|---------------|------|------|--------|------|------|-------|
|                       |                                                             | Min.          | Typ. | Max. | Min.   | Typ. | Max. |       |
| Supply Section        |                                                             |               |      |      |        |      |      |       |
| Input Voltage Range   | T <sub>J</sub> = 25°C to T <sub>MAX</sub>                   | 4.5           |      | 40   | 4.5    |      | 40   | V     |
|                       |                                                             | 4.7           |      | 40   | 4.7    |      | 40   | V     |
| Supply Current        | +V <sub>IN</sub> = 40V, Outputs open, T <sub>J</sub> = 25°C |               | 7    | 10   |        | 7    | 10   | mA    |
| Reference Section     |                                                             |               |      |      |        |      |      |       |
| Output Voltage        | T <sub>J</sub> = 25°C                                       | 2.48          | 2.50 | 2.52 | 2.45   | 2.50 | 2.55 | V     |
|                       |                                                             | 2.45          |      | 2.55 | 2.40   |      | 2.60 | V     |
| Line Regulation       | +V <sub>IN</sub> = 5 to 30V                                 |               | 1    | 5    |        | 1    | 5    | mV    |
| Load Regulation       | I <sub>REF</sub> = 0 to 10mA                                |               | 1    | 10   |        | 1    | 10   | mV    |
| Short Circuit Current | V <sub>REF</sub> = 0V                                       | 12            | 25   | 40   | 12     | 25   | 40   | mA    |
| Temperature Stability |                                                             |               | .005 |      |        | .005 |      | %/°C  |

## Electrical Characteristics (Continued)

| Parameter                      | Test Conditions                                                                                       | SG1543/SG2543 |      |                     | SG3543 |      |                     | Units |
|--------------------------------|-------------------------------------------------------------------------------------------------------|---------------|------|---------------------|--------|------|---------------------|-------|
|                                |                                                                                                       | Min.          | Typ. | Max.                | Min.   | Typ. | Max.                |       |
| Comparator Section             |                                                                                                       |               |      |                     |        |      |                     |       |
| Input Threshold (Note 5)       | T <sub>J</sub> = 25°C                                                                                 | 2.45          | 2.50 | 2.55                | 2.40   | 2.50 | 2.60                | V     |
|                                |                                                                                                       | 2.40          |      | 2.60                | 2.35   |      | 2.65                | V     |
| Input Hysteresis               |                                                                                                       |               | 25   |                     |        | 25   |                     | mV    |
| Input Bias Current             | Sense input = 0V                                                                                      |               | 0.3  | 1.0                 |        | 0.3  | 1.0                 | μA    |
| Delay Saturation               |                                                                                                       |               | 0.2  | 0.5                 |        | 0.2  | 0.5                 | V     |
| Delay High Level               |                                                                                                       |               | 6    | 8                   |        | 6    | 8                   | V     |
| Delay Charging Current         | V <sub>D</sub> = 0V                                                                                   | 200           | 250  | 300                 | 200    | 250  | 300                 | μA    |
| Indicate Saturation            | I <sub>L</sub> = 10mA                                                                                 |               | 0.2  | 0.5                 |        | 0.2  | 0.5                 | V     |
| Indicate Leakage               | V <sub>IND</sub> = 40V                                                                                |               | .01  | 1.0                 |        | 0.1  | 1.0                 | μA    |
| Propagation Delay              | V <sub>O.V. INPUT</sub> = 2.7V, V <sub>U.V. INPUT</sub> = 2.3V, T <sub>J</sub> = 25°C                 |               |      |                     |        |      |                     |       |
|                                | C <sub>D</sub> = 0                                                                                    |               | 400  |                     |        | 400  |                     | ns    |
|                                | C <sub>D</sub> = 1μF                                                                                  |               | 10   |                     |        | 10   |                     | ms    |
| SCR Trigger Section            |                                                                                                       |               |      |                     |        |      |                     |       |
| Peak Output Current            | +V <sub>IN</sub> = 5V, R <sub>G</sub> = 0, V <sub>O</sub> = 0                                         | 100           | 200  | 400                 | 100    | 200  | 400                 | mA    |
| Peak Output Voltage            | +V <sub>IN</sub> = 15V, I <sub>O</sub> = 100mA                                                        | 12            | 13   |                     | 12     | 13   |                     | V     |
| Output Off Voltage             | +V <sub>IN</sub> = 40V, R <sub>L</sub> = 1kΩ                                                          |               | 0    | 0.1                 |        | 0    | 0.1                 | V     |
| Remote Activate Current        | REM. ACT. pin = Gnd                                                                                   |               | 0.4  | 0.8                 |        | 0.4  | 0.8                 | mA    |
| Remote Activate Voltage        | REM. ACT. pin open                                                                                    |               | 2    | 6                   |        | 2    | 6                   | V     |
| Reset Current                  | RESET pin = Gnd, REM. ACT. = Gnd                                                                      |               | 0.4  | 0.8                 |        | 0.4  | 0.8                 | mA    |
| Reset Voltage                  | RESET pin open, REM. ACT. = Gnd                                                                       |               | 2    | 6                   |        | 2    | 6                   | V     |
| Output Current Rise Time       | R <sub>L</sub> = 50Ω, T <sub>J</sub> = 25°C, C <sub>D</sub> = 0                                       |               | 400  |                     |        | 400  |                     | mA/μs |
| Prop. Delay from REM. ACT. Pin | V <sub>REM. ACT.</sub> = 0.4V                                                                         |               | 300  |                     |        | 300  |                     | ns    |
| Prop. Delay fom O.V. INPUT Pin | V <sub>O.V. INPUT</sub> = 2.7V                                                                        |               | 500  |                     |        | 500  |                     | ns    |
| Current Limit Section          |                                                                                                       |               |      |                     |        |      |                     |       |
| Input Voltage Range            |                                                                                                       | 0             |      | V <sub>IN</sub> -3V | 0      |      | V <sub>IN</sub> -3V | V     |
| Input Bias Current             | OFFSET/COMP pin open, V <sub>CM</sub> = 0V                                                            |               | 0.3  | 1.0                 |        | 0.3  | 1.0                 | μA    |
| Input Offset Voltage           | OFFSET/COMP pin open, V <sub>CM</sub> = 0V,<br>10kΩ from OFFSET/COMP pin to Gnd, T <sub>J</sub> =25°C | 80            | 100  | 120                 | 70     | 100  | 130                 | mV    |
| CMRR                           | 0 ≤ V <sub>CM</sub> ≤ 12V, V <sub>IN</sub> = 15V                                                      | 60            | 70   |                     | 60     | 70   |                     | dB    |
| AVOL                           | OFFSET/COMP pin open, V <sub>CM</sub> = 0V                                                            | 72            | 80   |                     | 72     | 80   |                     | dB    |
| Output Saturation              | I <sub>L</sub> = 10mA                                                                                 |               | 0.2  | 0.5                 |        | 0.2  | 0.5                 | V     |
| Output Leakage                 | V <sub>IND</sub> = 40V                                                                                |               | .01  | 1.0                 |        | .01  | 1.0                 | μA    |
| Small Signal Bandwidth         | A <sub>V</sub> = 0dB, T <sub>J</sub> = 25°C                                                           |               | 5    |                     |        | 5    |                     | MHz   |
| Propagation Delay              | V <sub>OVERDRIVE</sub> = 100mV, T <sub>J</sub> = 25°C                                                 |               | 200  |                     |        | 200  |                     | ns    |

Note 5. Input voltage rising on O.V. Input and falling on U.V. Input.

## Characteristics Curves

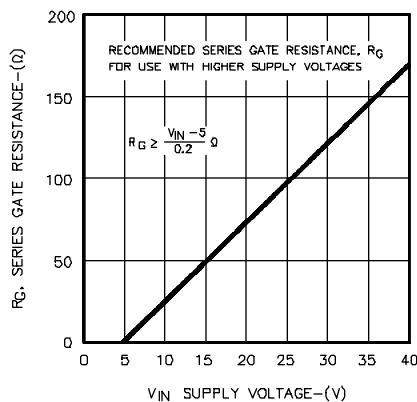


Figure 1 · SCR Trigger Power Limiting

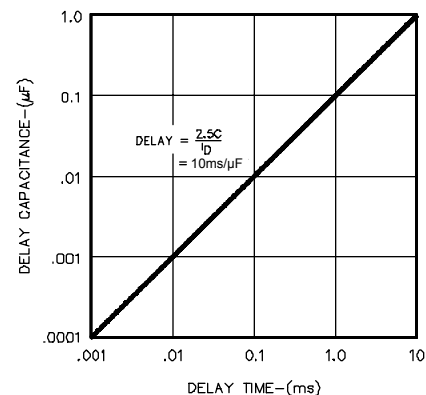


Figure 2 · Activation Delay Vs. Capacitor Value

## Characteristics Curves (Continued)

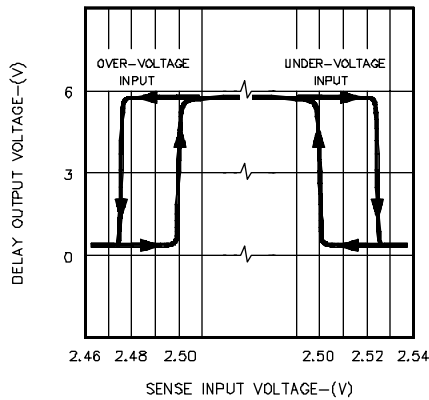


**Figure 3** • Comparator Input Hysteresis

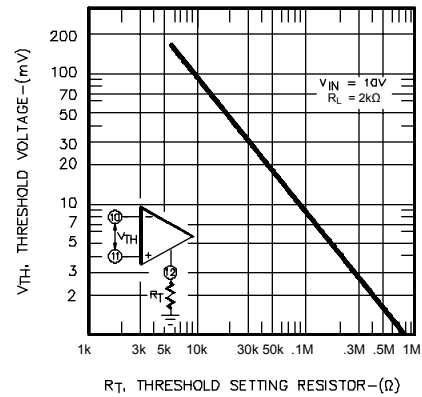


**Figure 4** • Current Limit Input Threshold

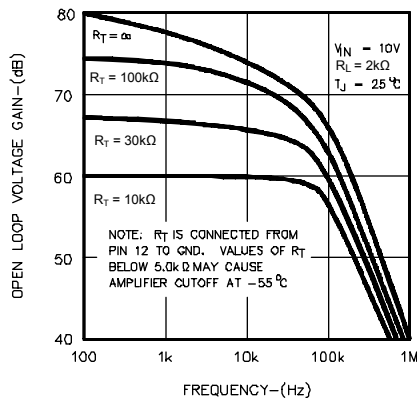


**Figure 5** • Current Limit Amplifier Gain

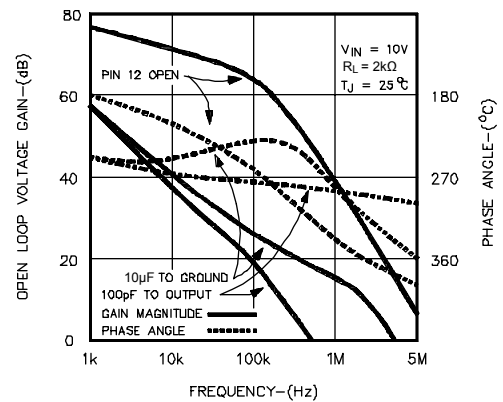


**Figure 6** • Current Limit Amplifier Frequency Response

## Application Information

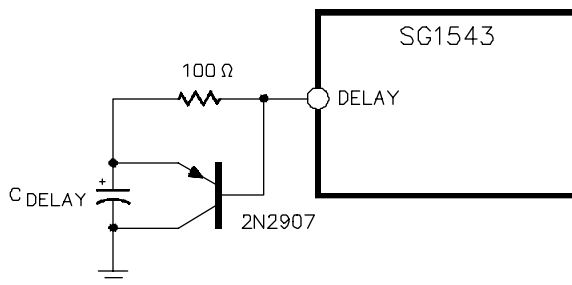


**Figure 7** • Surge Limit Circuit for Large Delay Capacitors

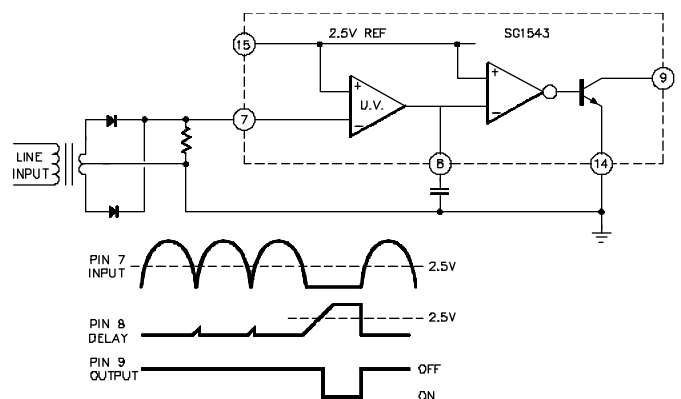


**Figure 8** • Input Line Monitor

The 100 ohm resistor limits the peak discharge current into the SG1543 while the external PNP transistor provides a high peak-current discharge path for the delay capacitor.

## Application Information (Continued)

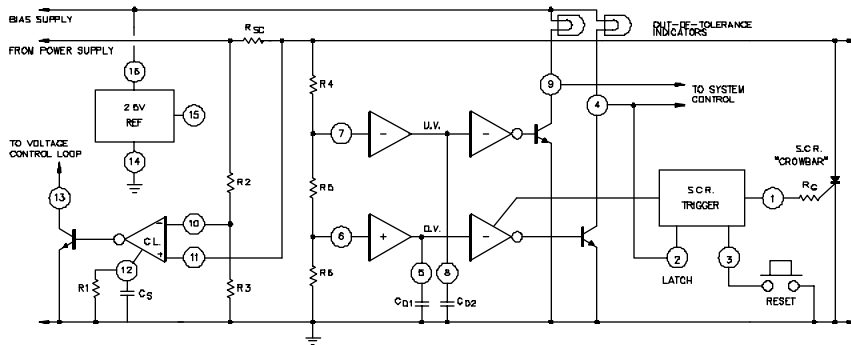


Figure 9 · Typical Application Circuit

The values for the external components are determined as follows:

$$\text{Current limit input threshold, } V_{TH} \approx \frac{1000}{R_1}$$

$C_S$  is determined by the current loop dynamics

$$\text{Peak current to load, } I_p \approx \frac{V_{TH}}{R_{SC}} + \frac{V_O}{R_{SC}} \left( \frac{R_2}{R_2 + R_3} \right)$$

$$\text{Short circuit current, } I_{SC} = \frac{V_{TH}}{R_{SC}}$$

$$\text{Low output voltage limit, } V_O (\text{Low}) = \frac{2.5 (R_4 + R_5 + R_6)}{R_5 + R_6}$$

$$\text{High output voltage limit, } V_O (\text{High}) = \frac{2.5 (R_4 + R_5 + R_6)}{R_6}$$

$$\text{Voltage sensing delay, } t_D = 10,000 C_D$$

$$\text{SCR trigger power limiting resistor, } R_G > \frac{V_{IN} - 5}{0.2}$$

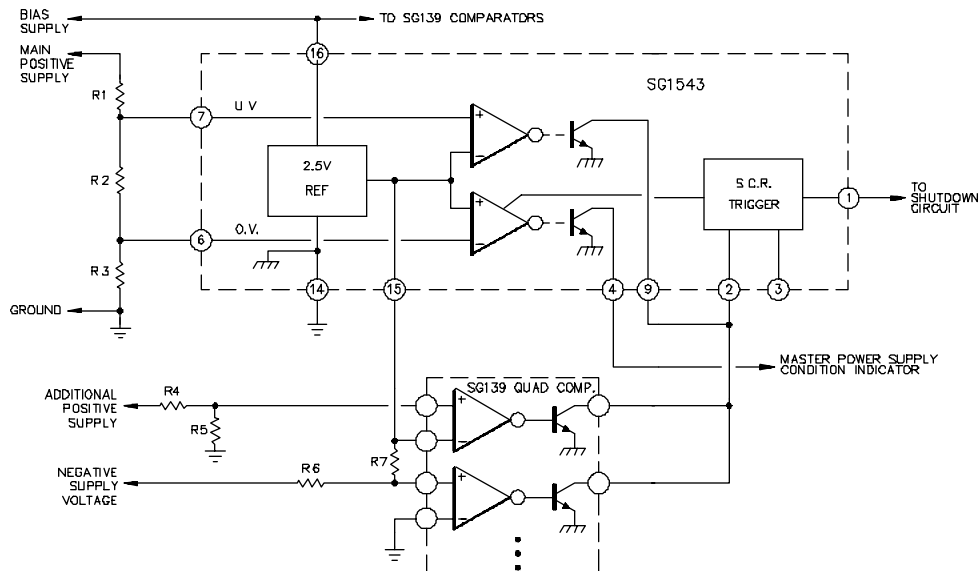


Figure 10 · Sensing Multiple Supply Voltages

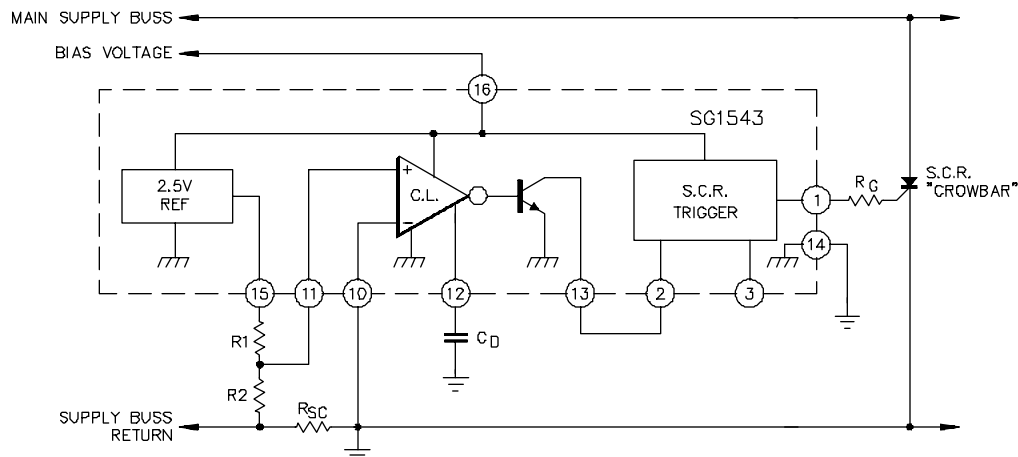
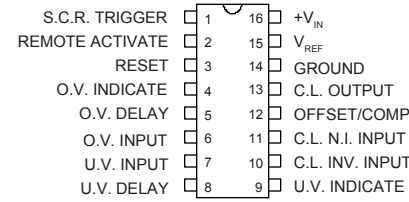
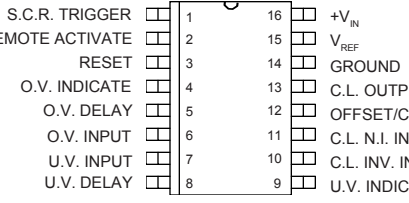
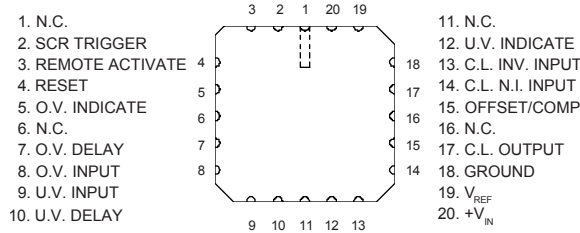


Figure 11 · Over Current Shutdown


## Connection Diagrams and Ordering Information (See Notes Below)

| Package                                                            | Part No.                                | Ambient Temperature Range                          | Connection Diagram                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|--------------------------------------------------------------------|-----------------------------------------|----------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 16-PIN CERAMIC DIP<br>J - PACKAGE                                  | SG1543J-883B<br>SG1543J-DESC<br>SG1543J | -55°C to 125°C<br>-55°C to 125°C<br>-55°C to 125°C |  <p>S.C.R. TRIGGER 1<br/>REMOTE ACTIVATE 2<br/>RESET 3<br/>O.V. INDICATE 4<br/>O.V. DELAY 5<br/>O.V. INPUT 6<br/>U.V. INPUT 7<br/>U.V. DELAY 8</p> <p>+V<sub>IN</sub><br/>V<sub>REF</sub><br/>GROUND<br/>C.L. OUTPUT<br/>OFFSET/COMP<br/>C.L. N.I. INPUT<br/>C.L. INV. INPUT<br/>U.V. INDICATE</p> <p>N Package: RoHS Compliant / Pb-free Transition DC: 0503<br/>N Package: RoHS / Pb-free 100% Matte Tin Lead Finish</p>   |
| 16-PIN PLASTIC DIP<br>N - PACKAGE                                  | SG2543N<br>SG3543N                      | -25°C to 85°C<br>0°C to 70°C                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| 16-PIN WIDE BODY<br>PLASTIC SOIC<br>DW - PACKAGE                   | SG2543DW<br>SG3543DW                    | -25°C to 85°C<br>0°C to 70°C                       |  <p>S.C.R. TRIGGER 1<br/>REMOTE ACTIVATE 2<br/>RESET 3<br/>O.V. INDICATE 4<br/>O.V. DELAY 5<br/>O.V. INPUT 6<br/>U.V. INPUT 7<br/>U.V. DELAY 8</p> <p>+V<sub>IN</sub><br/>V<sub>REF</sub><br/>GROUND<br/>C.L. OUTPUT<br/>OFFSET/COMP<br/>C.L. N.I. INPUT<br/>C.L. INV. INPUT<br/>U.V. INDICATE</p> <p>DW Package: RoHS Compliant / Pb-free Transition DC: 0516<br/>DW Package: RoHS / Pb-free 100% Matte Tin Lead Finish</p> |
| 20-PIN CERAMIC<br>LEADLESS CHIP CARRIER<br>L - PACKAGE<br>(Note 3) | SG1543L-883B<br>SG1543L-DESC<br>SG1543L | -55°C to 125°C<br>-55°C to 125°C                   |  <p>1. N.C.<br/>2. SCR TRIGGER<br/>3. REMOTE ACTIVATE<br/>4. RESET<br/>5. O.V. INDICATE<br/>6. N.C.<br/>7. O.V. DELAY<br/>8. O.V. INPUT<br/>9. U.V. INPUT<br/>10. U.V. DELAY</p> <p>11. N.C.<br/>12. U.V. INDICATE<br/>13. C.L. INV. INPUT<br/>14. C.L. N.I. INPUT<br/>15. OFFSET/COMP<br/>16. N.C.<br/>17. C.L. OUTPUT<br/>18. GROUND<br/>19. V<sub>REF</sub><br/>20. +V<sub>IN</sub></p>                                 |

- Note
1. Contact factory for DESC product availability.
  2. All packages are viewed from the top.
  3. Consult factory for product availability.
  4. Hermetic Packages J & L use Pb37/Sn63 hot solder lead finish, contact factory for availability of RoHS versions.

## Package Outline Dimensions

Controlling dimensions are in inches, metric equivalents are shown for general information.

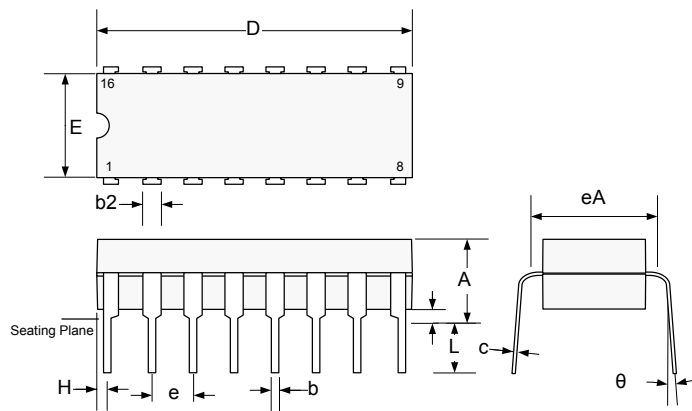


| DIM | MILLIMETERS |       | INCHES    |       |
|-----|-------------|-------|-----------|-------|
|     | MIN         | MAX   | MIN       | MAX   |
| A   | -           | 5.08  | -         | 0.200 |
| b   | 0.38        | 0.51  | 0.015     | 0.020 |
| b2  | 1.04        | 1.65  | 0.045     | 0.065 |
| c   | 0.20        | 0.38  | 0.008     | 0.015 |
| D   | 19.30       | 19.94 | 0.760     | 0.785 |
| E   | 5.59        | 7.11  | 0.220     | 0.280 |
| e   | 2.54 BSC    |       | 0.100 BSC |       |
| eA  | 7.37        | 7.87  | 0.290     | 0.310 |
| H   | 0.63        | 1.78  | 0.025     | 0.070 |
| L   | 3.18        | 5.08  | 0.125     | 0.200 |
| θ   | -           | 15°   | -         | 15°   |
| Q   | 0.51        | 1.02  | 0.020     | 0.040 |

Note:

Dimensions do not include protrusions; these shall not exceed 0.155mm (.006") on any side. Lead dimension shall not include solder coverage.

**Figure 12 · J 16-Pin Ceramic Dip**

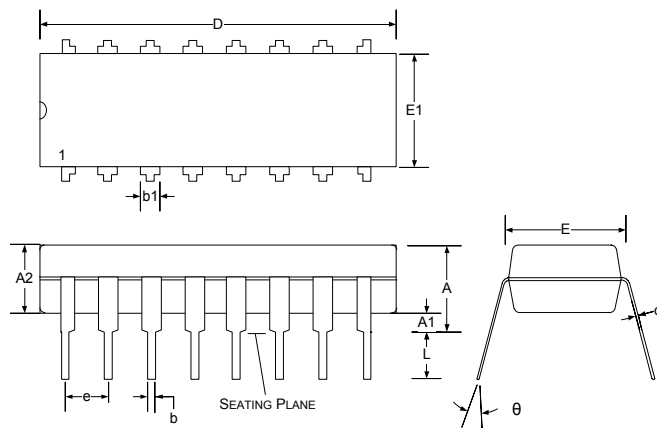


| DIM | MILLIMETERS |       | INCHES     |       |
|-----|-------------|-------|------------|-------|
|     | MIN         | MAX   | MIN        | MAX   |
| A   | -           | 5.33  | -          | 0.210 |
| A1  | 0.38        | -     | 0.015      | -     |
| A2  | 3.30 Typ.   |       | 0.130 Typ. |       |
| b   | 0.36        | 0.56  | 0.014      | 0.022 |
| b1  | 1.14        | 1.78  | 0.045      | 0.070 |
| c   | 0.20        | 0.36  | 0.008      | 0.014 |
| D   | 18.67       | 19.69 | 0.735      | 0.775 |
| e   | 2.54 BSC    |       | 0.100 BSC  |       |
| E   | 7.62        | 8.26  | 0.300      | 0.325 |
| E1  | 6.10        | 7.11  | 0.240      | 0.280 |
| L   | 2.92        | 0.381 | 0.115      | 0.150 |
| θ   | -           | 15°   | -          | 15°   |

Note:

Dimensions do not include protrusions; these shall not exceed 0.155mm (.006") on any side. Lead dimension shall not include solder coverage.

**Figure 13 · N 16-Pin Plastic Dual Inline Package Dimensions**

## Package Outline Dimensions (Continued)

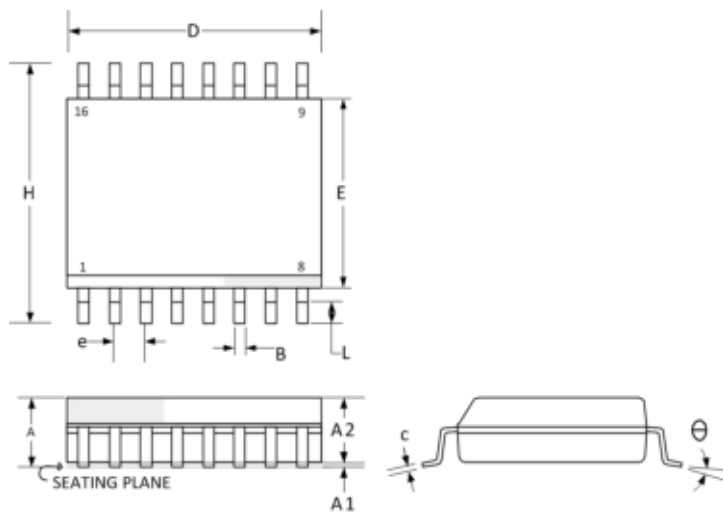


| DIM | MILLIMETERS |       | INCHES   |       |
|-----|-------------|-------|----------|-------|
|     | MIN         | MAX   | MIN      | MAX   |
| A   | 2.06        | 2.65  | 0.081    | 0.104 |
| A1  | 0.10        | 0.30  | 0.004    | 0.012 |
| A2  | 2.03        | 2.55  | 0.080    | 0.100 |
| B   | 0.33        | 0.51  | 0.013    | 0.020 |
| c   | 0.23        | 0.32  | 0.009    | 0.013 |
| D   | 10.08       | 10.50 | 0.397    | 0.413 |
| E   | 7.40        | 7.60  | 0.291    | 0.299 |
| e   | 1.27 BSC    |       | 0.05 BSC |       |
| H   | 10.00       | 10.65 | 0.394    | 0.419 |
| L   | 0.40        | 1.27  | 0.016    | 0.050 |
| θ   | 0°          | 8°    | 0°       | 8°    |
| *LC | -           | 0.10  | -        | 0.004 |

\*Lead co planarity

Note:

Dimensions do not include protrusions; these shall not exceed 0.155mm (.006") on any side. Lead dimension shall not include solder coverage.

**Figure 14 · DW 16-Pin SOWB Package Dimensions**

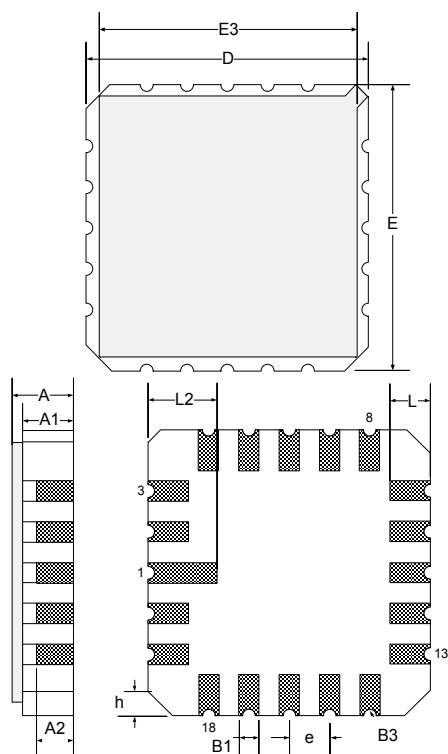

| DIM | MILLIMETERS |       | INCHES    |       |
|-----|-------------|-------|-----------|-------|
|     | MIN         | MAX   | MIN       | MAX   |
| D/E | 8.64        | 9.14  | 0.340     | 0.360 |
| E3  | -           | 8.128 | -         | 0.320 |
| e   | 1.270 BSC   |       | 0.050 BSC |       |
| B1  | 0.635 TYP   |       | 0.025 TYP |       |
| L   | 1.02        | 1.52  | 0.040     | 0.060 |
| A   | 1.626       | 2.286 | 0.064     | 0.090 |
| h   | 1.016 TYP   |       | 0.040 TYP |       |
| A1  | 1.372       | 1.68  | 0.054     | 0.066 |
| A2  | -           | 1.168 | -         | 0.046 |
| L2  | 1.91        | 2.41  | 0.075     | 0.95  |
| B3  | 0.203R      |       | 0.008R    |       |

Note:

All exposed metalized area shall be gold plated 60 micro-inch minimum thickness over nickel plated unless otherwise specified in purchase order.

**Figure 15 · L 20-Pin Ceramic LCC Package Outline Dimensions**



**Microsemi Corporate Headquarters**  
One Enterprise, Aliso Viejo,  
CA 92656 USA

**Within the USA:** +1 (800) 713-4113  
**Outside the USA:** +1 (949) 380-6100  
**Sales:** +1 (949) 380-6136  
**Fax:** +1 (949) 215-4996

**E-mail:** [sales.support@microsemi.com](mailto:sales.support@microsemi.com)

© 2015 Microsemi Corporation. All rights reserved. Microsemi and the Microsemi logo are trademarks of Microsemi Corporation. All other trademarks and service marks are the property of their respective owners.

Microsemi Corporation (Nasdaq: MSCC) offers a comprehensive portfolio of semiconductor and system solutions for communications, defense & security, aerospace and industrial markets. Products include high-performance and radiation-hardened analog mixed-signal integrated circuits, FPGAs, SoCs and ASICs; power management products; timing and synchronization devices and precise time solutions, setting the world's standard for time; voice processing devices; RF solutions; discrete components; security technologies and scalable anti-tamper products; Power-over-Ethernet ICs and midspans; as well as custom design capabilities and services. Microsemi is headquartered in Aliso Viejo, Calif., and has approximately 3,400 employees globally. Learn more at [www.microsemi.com](http://www.microsemi.com).

Microsemi makes no warranty, representation, or guarantee regarding the information contained herein or the suitability of its products and services for any particular purpose, nor does Microsemi assume any liability whatsoever arising out of the application or use of any product or circuit. The products sold hereunder and any other products sold by Microsemi have been subject to limited testing and should not be used in conjunction with mission-critical equipment or applications. Any performance specifications are believed to be reliable but are not verified, and Buyer must conduct and complete all performance and other testing of the products, alone and together with, or installed in, any end-products. Buyer shall not rely on any data and performance specifications or parameters provided by Microsemi. It is the Buyer's responsibility to independently determine suitability of any products and to test and verify the same. The information provided by Microsemi hereunder is provided "as is, where is" and with all faults, and the entire risk associated with such information is entirely with the Buyer. Microsemi does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other IP rights, whether with regard to such information itself or anything described by such information. Information provided in this document is proprietary to Microsemi, and Microsemi reserves the right to make any changes to the information in this document or to any products and services at any time without notice.